



Features


- Complementary to MMBT5401
- Ideal for Medium Power Amplification and Switching



SOT-23 top view



Schematic diagram



G1=Device code

Marking and pin assignment



Pb-Free



RoHS



HAL

Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	180	V
V_{CEO}	Collector-Emitter Voltage	160	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current	600	mA
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	416	°C/W
T_J, T_{STG}	Operating and Storage Temperature Range	-55~+150	°C

Electrical Characteristics (Ta=25°C unless otherwise specified)







Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	180	--	--	V
$V_{(BR)CEO}^*$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	160	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=10\mu A, I_C=0$	6	--	--	V
I_{CBO}	Collector cut-off current	$V_{CE}=120V, I_E=0$	--	--	50	nA
I_{EBO}	Emitter cut-off current	$V_{EB}=4V, I_C=0$	--	--	50	nA
h_{FE1}^*	DC current gain	$V_{CE}=5V, I_C=1mA$	80	--	--	
h_{FE2}^*		$V_{CE}=5V, I_C=10mA$	100	--	300	
h_{FE3}^*		$V_{CE}=5V, I_C=50mA$	50	--	--	
$V_{CE(sat)1}^*$	Collector-emitter saturation voltage	$I_C=10mA, I_B=1mA$	--	--	0.15	V
$V_{CE(sat)2}^*$		$I_C=50mA, I_B=5mA$	--	--	0.2	
$V_{BE(sat)1}^*$	Base-emitter saturation voltage	$I_C=10mA, I_B=1mA$	--	--	1	
$V_{BE(sat)2}^*$		$I_C=50mA, I_B=5mA$	--	--	1	
f_T	Transition frequency	$V_{CE}=10V, I_C=10mA, f=100MHz$	100	--	300	MHz
C_{ob}	Collector output capacitance	$V_{CB}=10V, I_E=0, f=1MHz$	--	--	6	pF



 *Pulse test: pulse width $\leq 300\mu s$, duty cycles $\leq 2.0\%$.

Classification Of $h_{FE(2)}$


Rank	L	H
Range	100-200	200-300
Marking	G1	

Typical Operating Characteristics

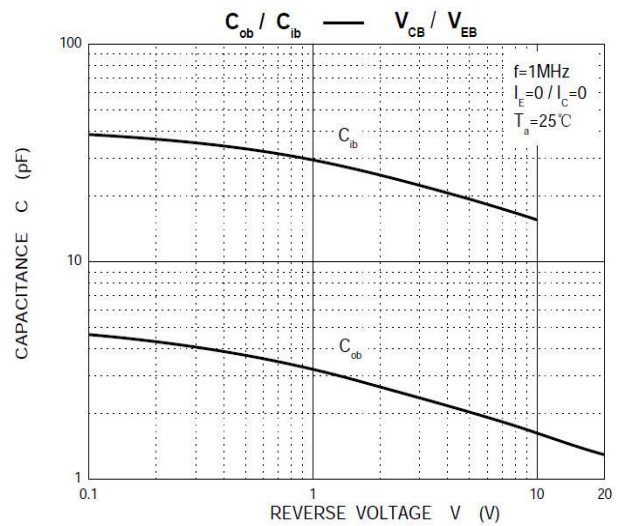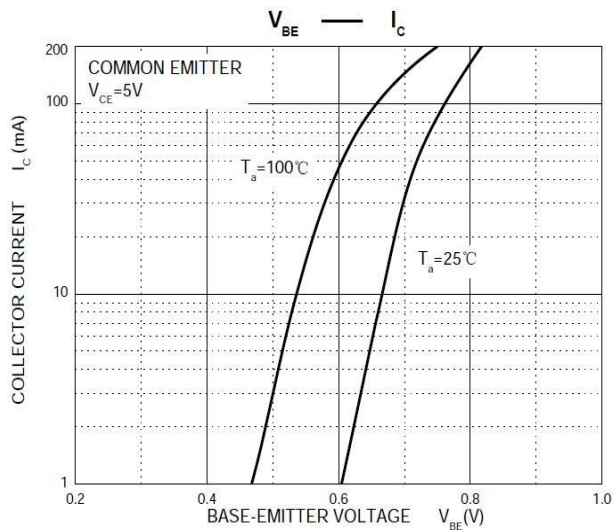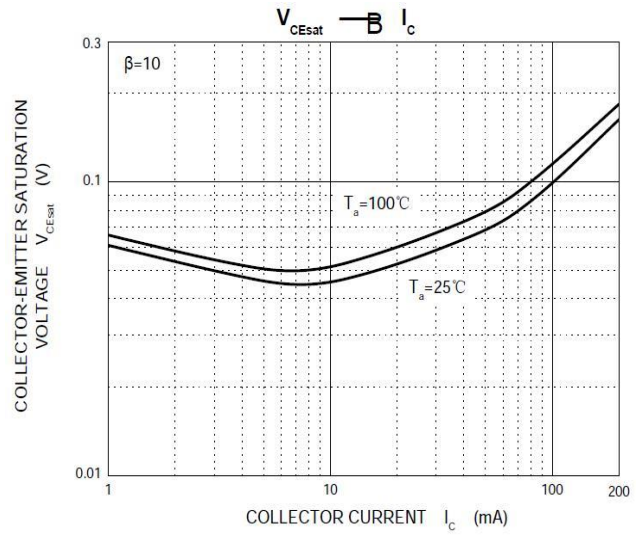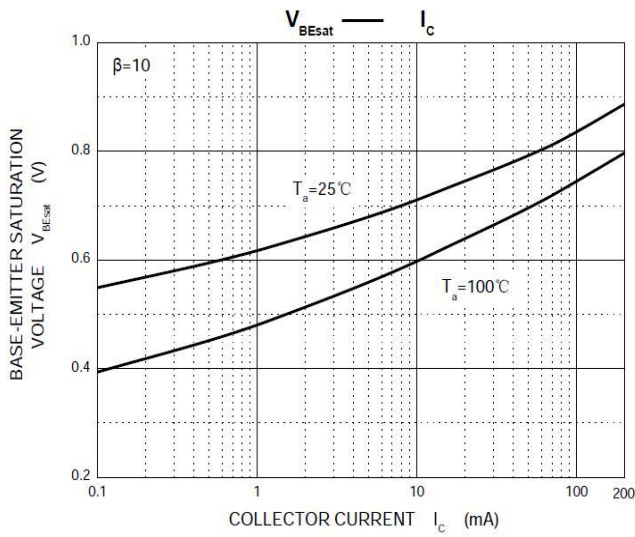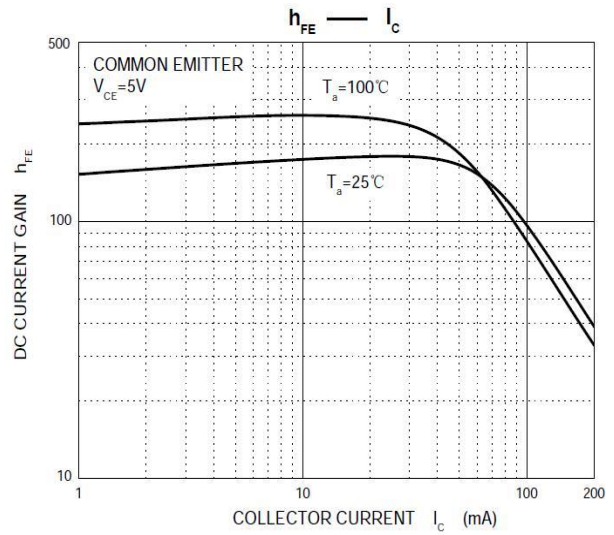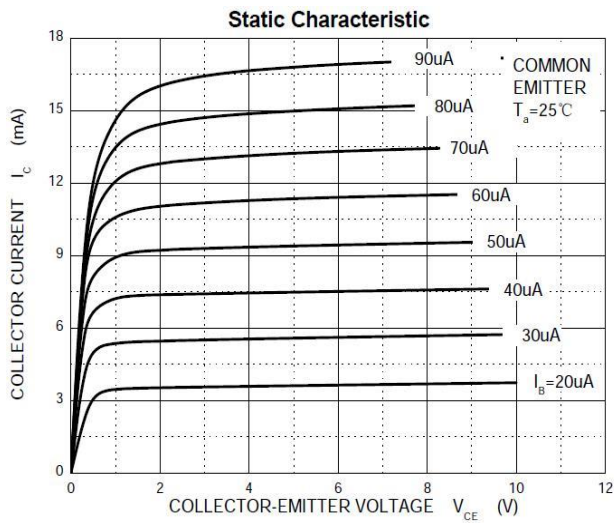

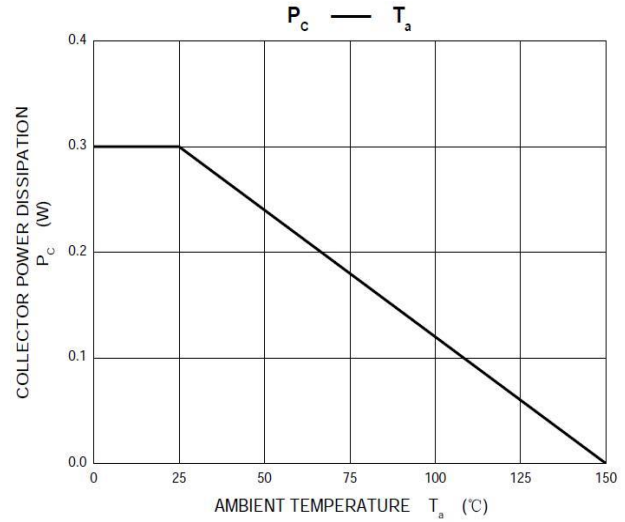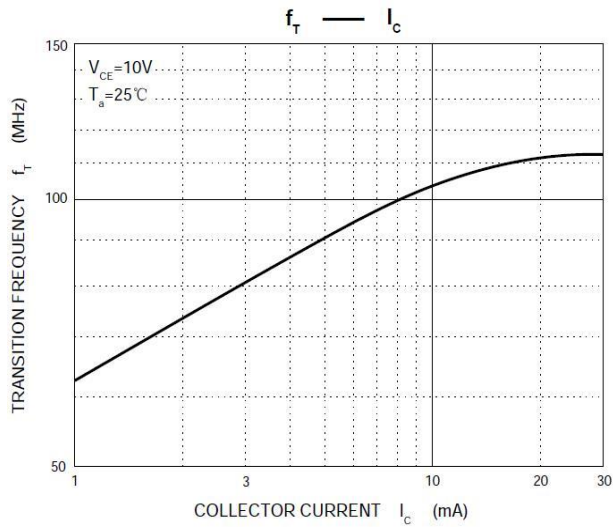
Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MMBT5551	SOT-23	G1	3,000	45,000	180,000	7"reel

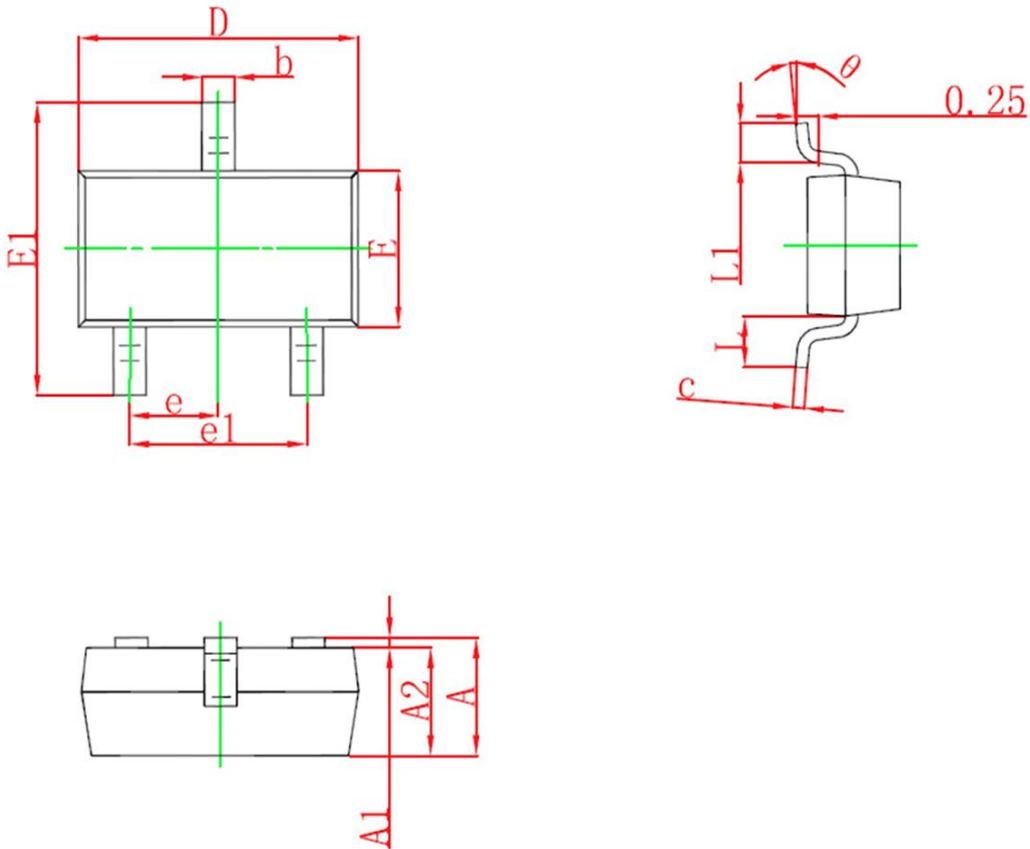SOT-23 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°