

Features

- Small surface mounting type
- High speed
- High reliability with high surge current handing capability



SOD-523 top view



Schematic diagram



Marking and pin assignment



Halogen-Free

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{RM}	Non-Repetitive Peak Reverse Voltage	85	V
V_R	DC Blocking Voltage	80	V
I_{FM}	Forward Continuous Current	200	mA
I_o	Average Rectified Output Current	100	mA
I_{FSM}	Non-Repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	2	A
P_D	Power Dissipation	150	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	833	$^{\circ}\text{C/W}$
T_J, T_{STG}	Operating and Storage Temperature Range	-55~ +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{R1}	Reverse current	$V_R=30\text{V}$	--	--	0.1	μA
I_{R2}		$V_R=80\text{V}$	--	--	0.5	μA
V_{F1}	Forward voltage	$I_F=1\text{mA}$	--	0.62	--	V
V_{F2}		$I_F=10\text{mA}$	--	0.75	--	V
V_{F3}		$I_F=100\text{mA}$	--	--	1.2	V
V_{F4}		$I_F=150\text{mA}$	--	--	1.25	V
C_T	Capacitance between terminals	$V_R=0, f=1\text{MHz}$	--	--	3	pF
t_{rr}	Reverse recovery time	$V_R=6\text{V}, I_F=10\text{mA}, R_L=100\Omega$	--	--	4	ns

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
1SS387	SOD-523	G	3,000	45,000	180,000	7"reel

Typical Operating Characteristics


Forward Characteristics

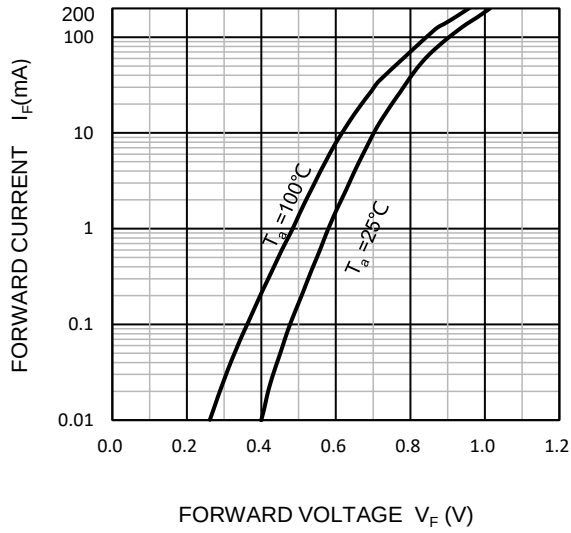


Reverse Characteristics

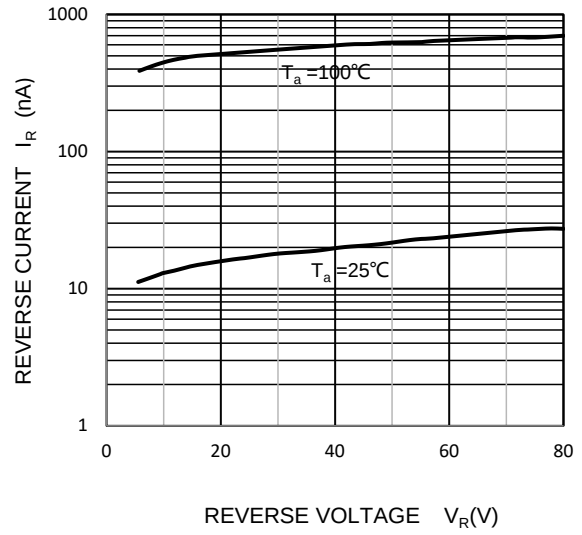


Capacitance Characteristics

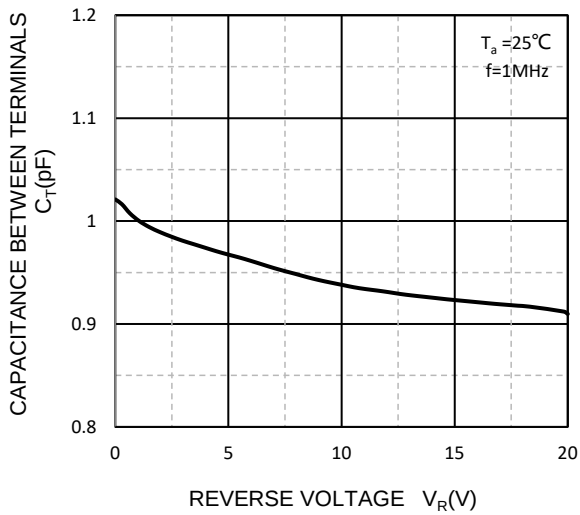

Power Derating Curve

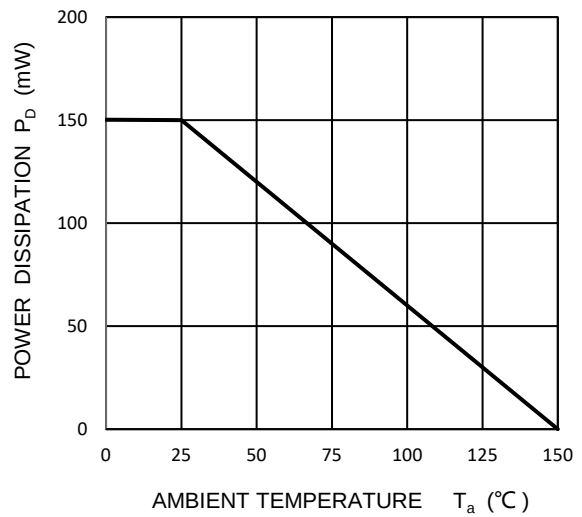

SOD-523 Package information

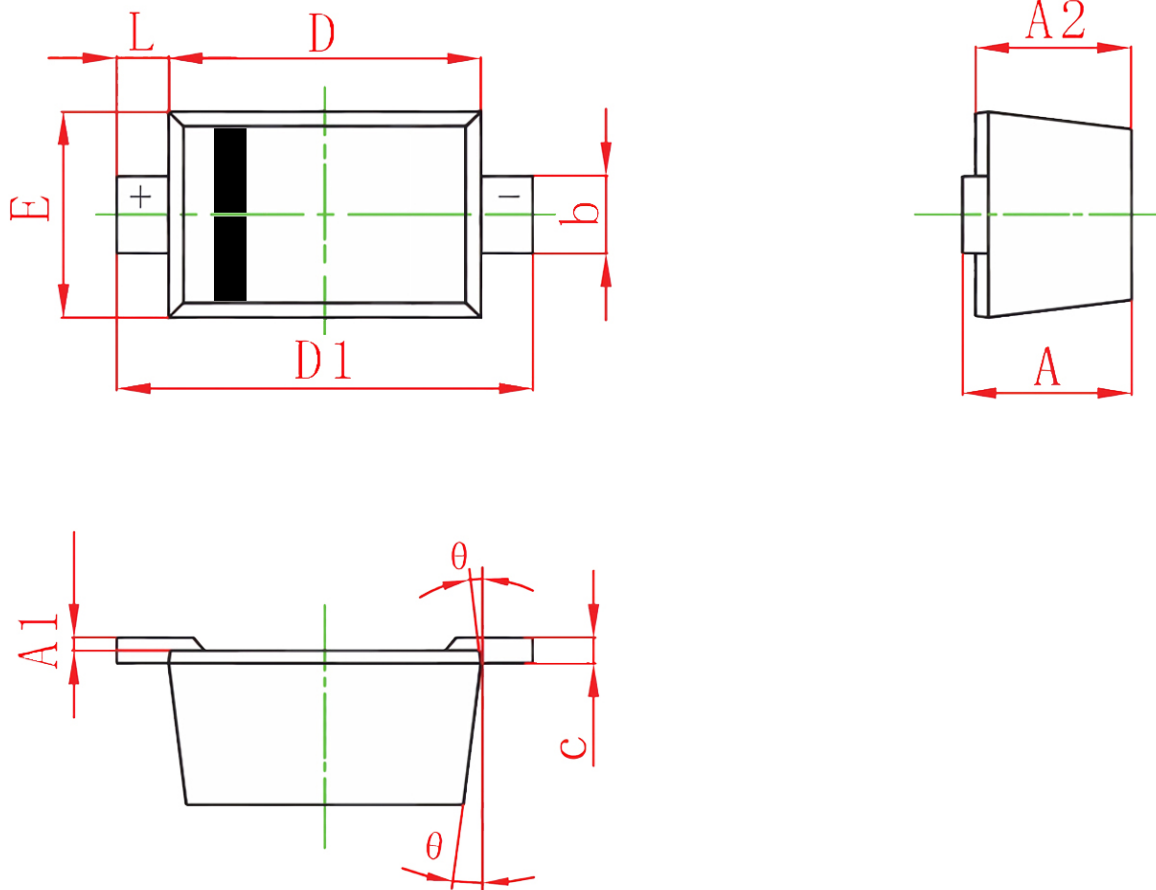

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.030
A1	0.010	0.070	0.000	0.003
A2	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.100	1.300	0.043	0.051
D1	1.500	1.700	0.059	0.067
E	0.750	0.850	0.030	0.033
L	0.200 REF		0.008 REF	
θ	7°REF		7°REF	