


Features


- Designed for General Purpose Amplifier and Low Speed Switching Applications.
- Lead Formed for Surface Mount Applications in Plastic Sleeves
- High breakdown voltage and large current capacity



TO-252-2L top view



Schematic diagram



Marking and pin assignment



Halogen-Free

Maximum Ratings(Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-120	V
V_{CEO}	Collector-Emitter Voltage	-100	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current	-2	A
P_C	Collector Power Dissipation	1.0	W
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	125	°C/W
T_J	Junction Temperature	150	°C
T_{stg}	Operation Junction and Storage Temperature Range	-65~+150	°C

Ordering Information (Example)



Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SA1593	TO-252-2L	A1593	2,500	5,000	35,000	13"reel






Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-10\mu A, I_E=0$	-120	--	--	V
$V_{CEO(SUS)}$	Collector-emitter breakdown voltage	$I_C=-1mA, I_B=0$	-100	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=-10\mu A, I_C=0$	-6	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=-100V, I_E=0$	--	--	-100	nA
I_{EBO}	Emitter cut-off current	$V_{EB}=-4V, I_C=0$	--	--	-100	nA
$H_{FE(1)}$	DC current gain	$V_{CE}=-5V, I_C=-0.1A$	100	--	400	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=-1A, I_B=-0.1A$	--	--	-0.6	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=-1A, I_B=-0.1A$	--	--	-1.2	V
C_{ob}	Collector output capacitance	$V_{CB}=-10V, I_E=0, f=1MHz$	--	26	--	pF
f_T	Transition frequency	$V_{CE}=-10V, I_C=-250mA, f=10MHz$	3	--	--	MHz


Classification Of h_{FE}

Rank	S	T
Range	100-240	200-400

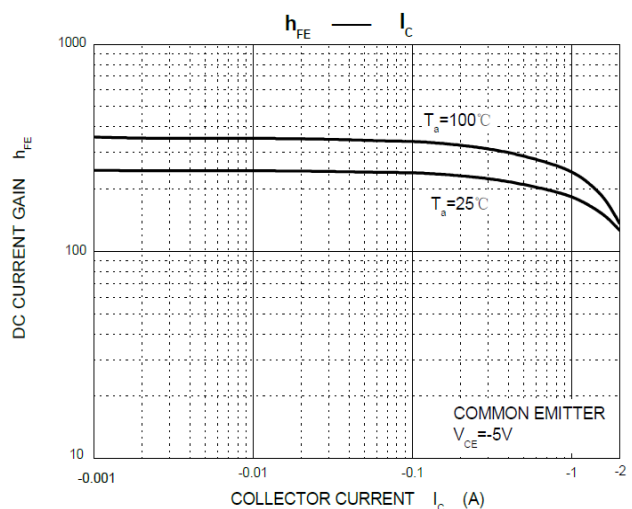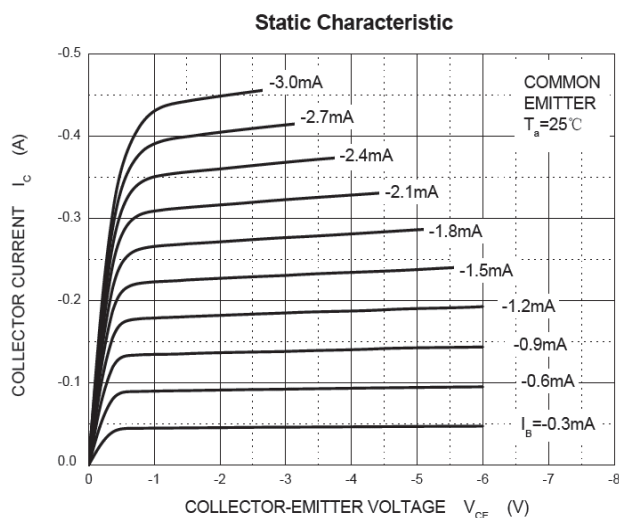Typical Characteristics

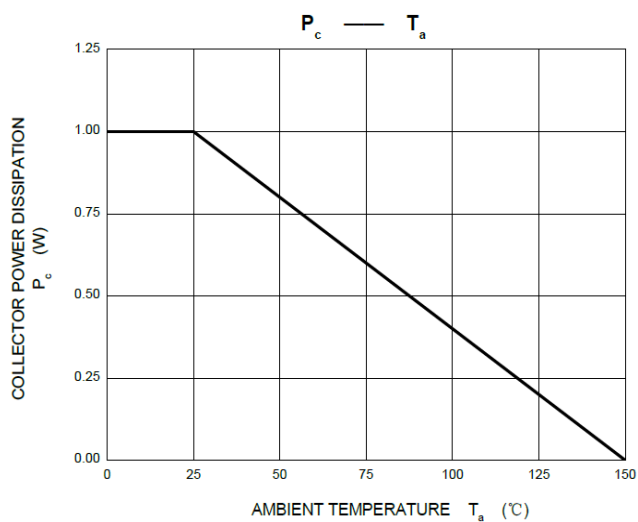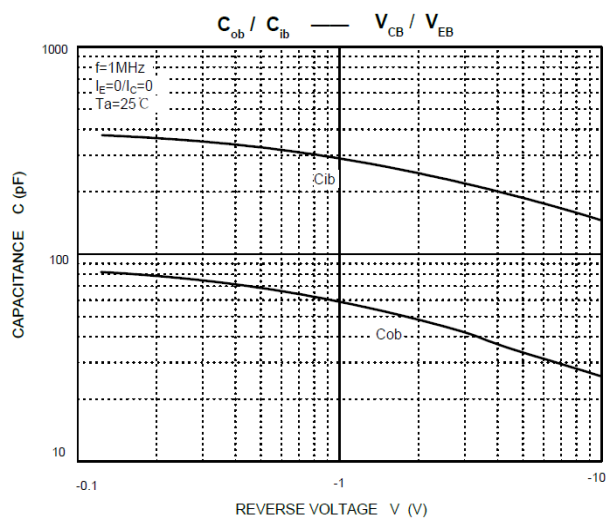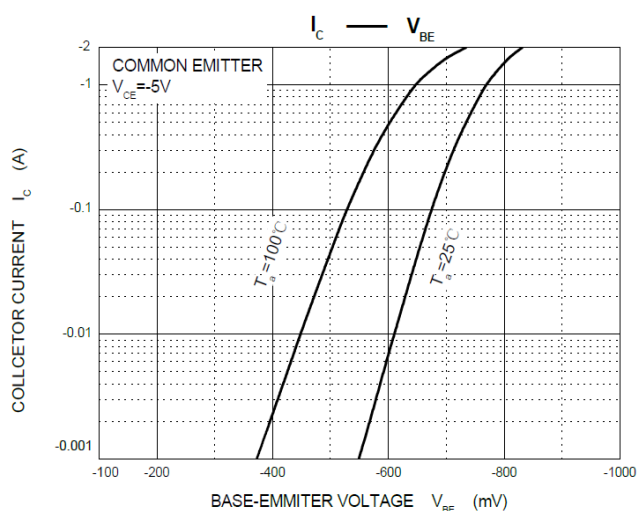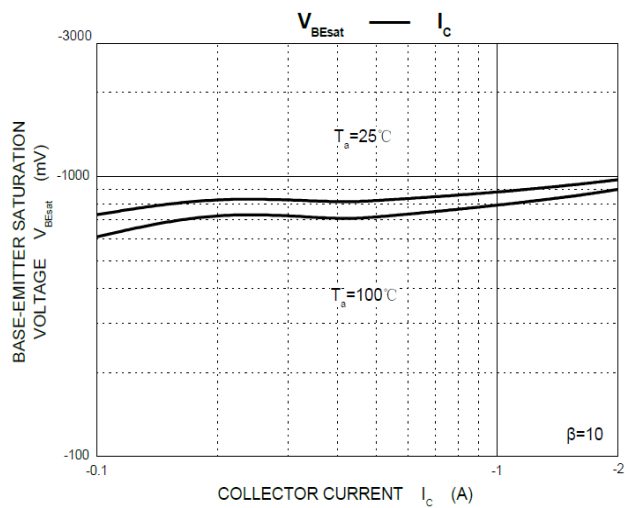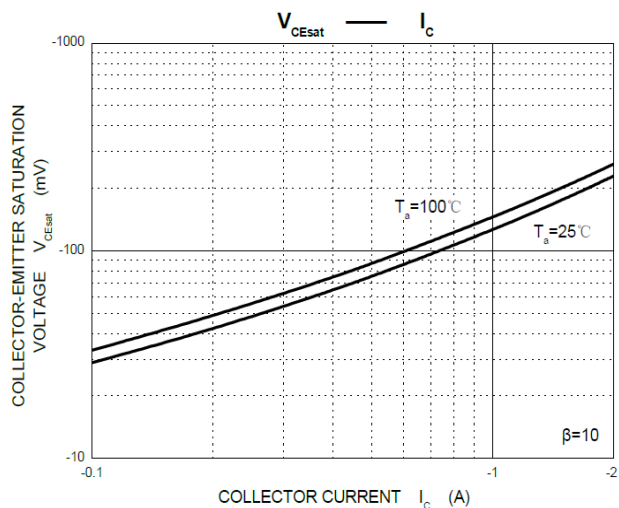


TO-252-2L Package information

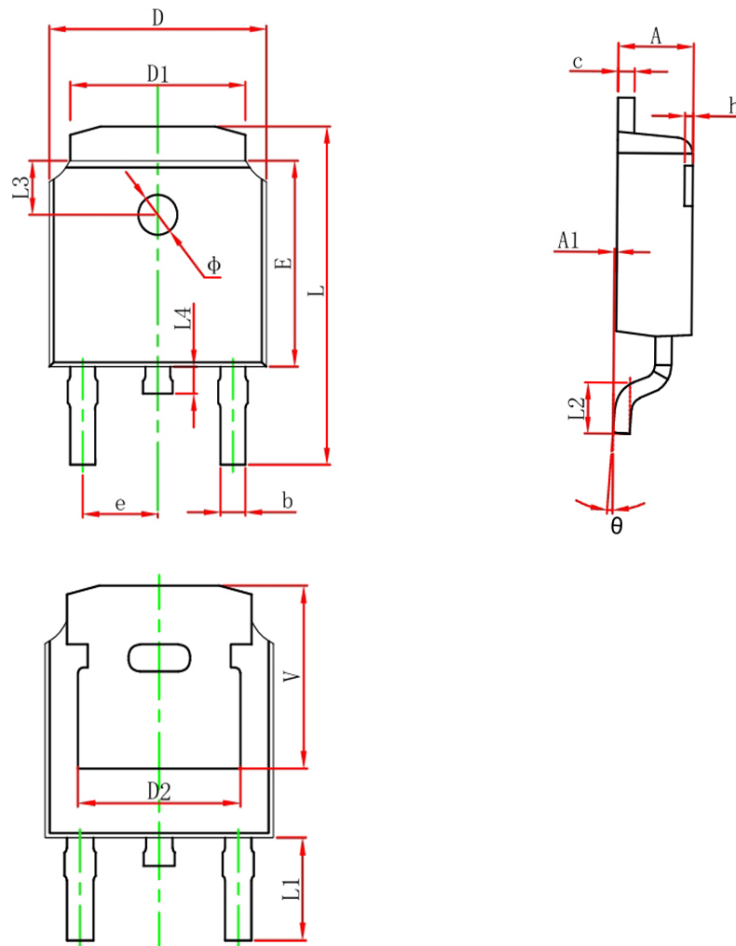

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	