



Features


- High current.
- Low $V_{CE(sat)}$ · $V_{CE(sat)} \leq 250\text{mV}$ at
 $I_C = 200\text{mA}$ / $I_B = 10\text{mA}$



SOT-523 top view



Schematic diagram



Marking and pin assignment



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)



Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	15	V
V_{CEO}	Collector-Emitter Voltage	12	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current	0.5	A
P_C	Collector Power Dissipation	0.15	W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C







Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SC5585	SOT-523	BX	3,000	45,000	180,000	7"reel


Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=10\mu A, I_E=0$	15	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	12	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=10\mu A, I_C=0$	6	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=15V, I_E=0$	--	--	0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=6V, I_C=0$	--	--	0.1	μA
H_{FE}	DC current gain	$V_{CE}=2V, I_C=10mA$	270	--	680	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=200mA, I_B=10mA$	--	--	0.25	V
f_T	Transition frequency	$V_{CE}=2V, I_C=10mA, f=100MHz$	--	320	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=10V, I_E=0, f=1MHz$	--	7.5	--	pF

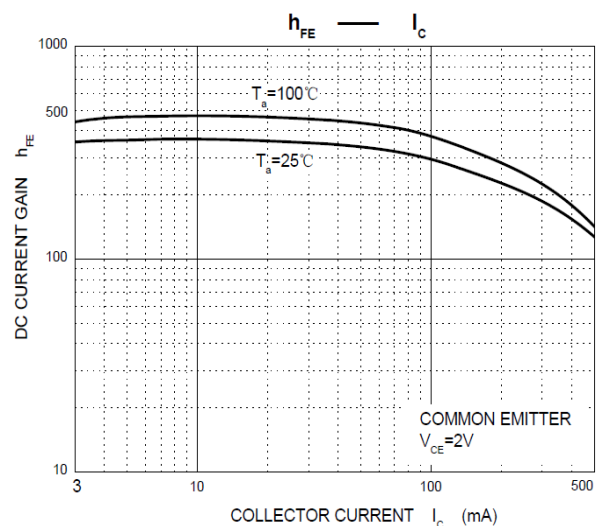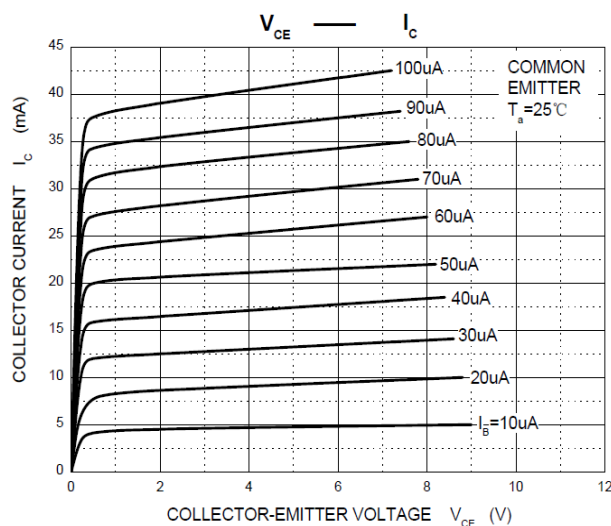Typical Characteristics

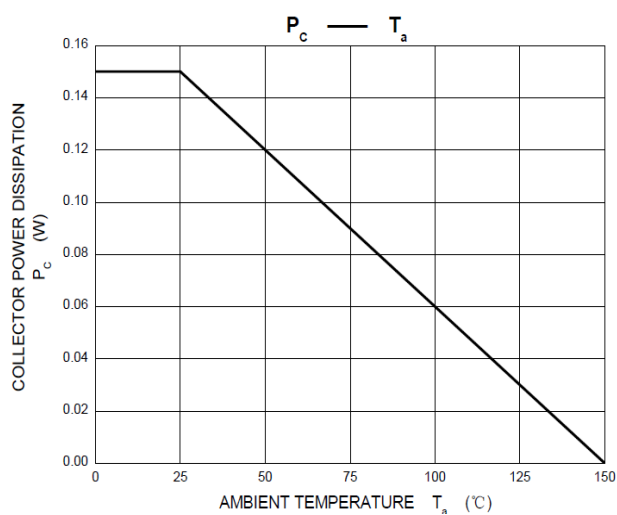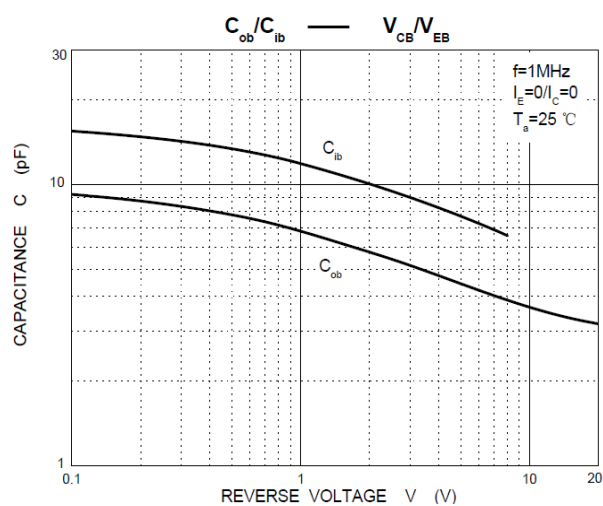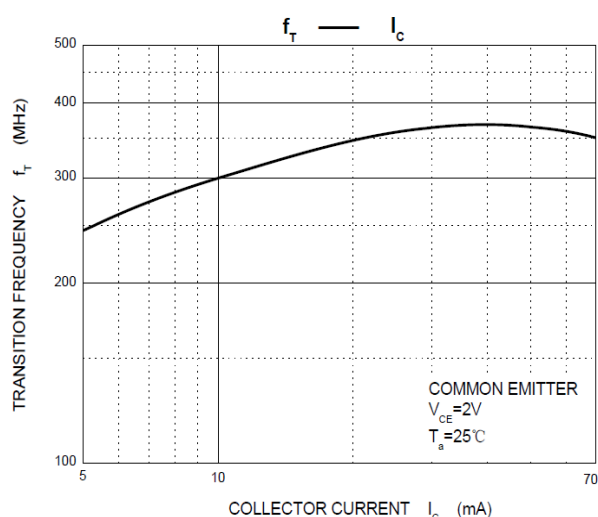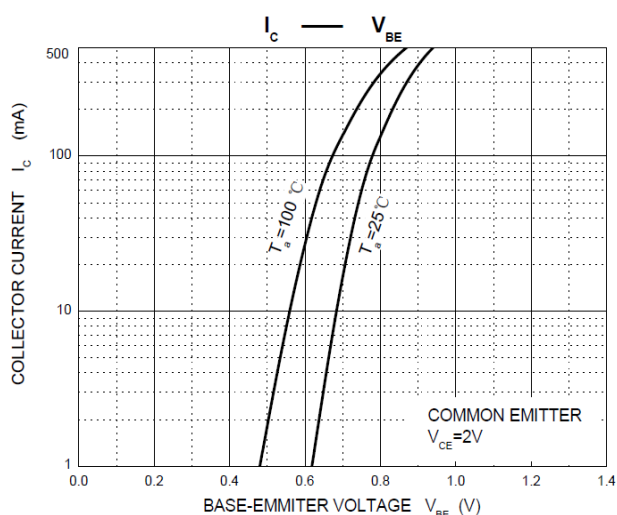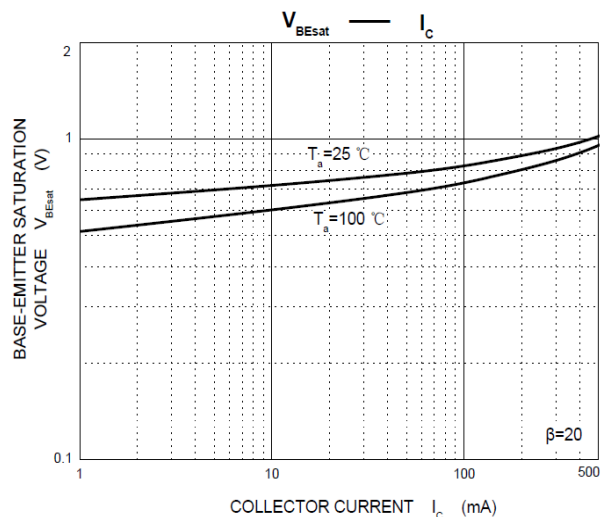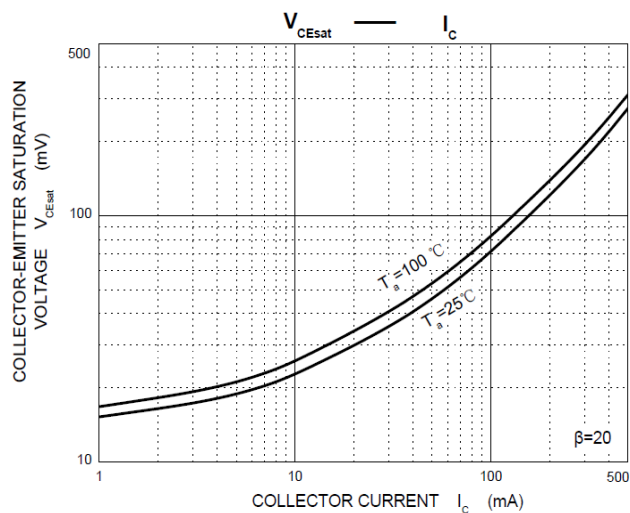


SOT-523 Package information

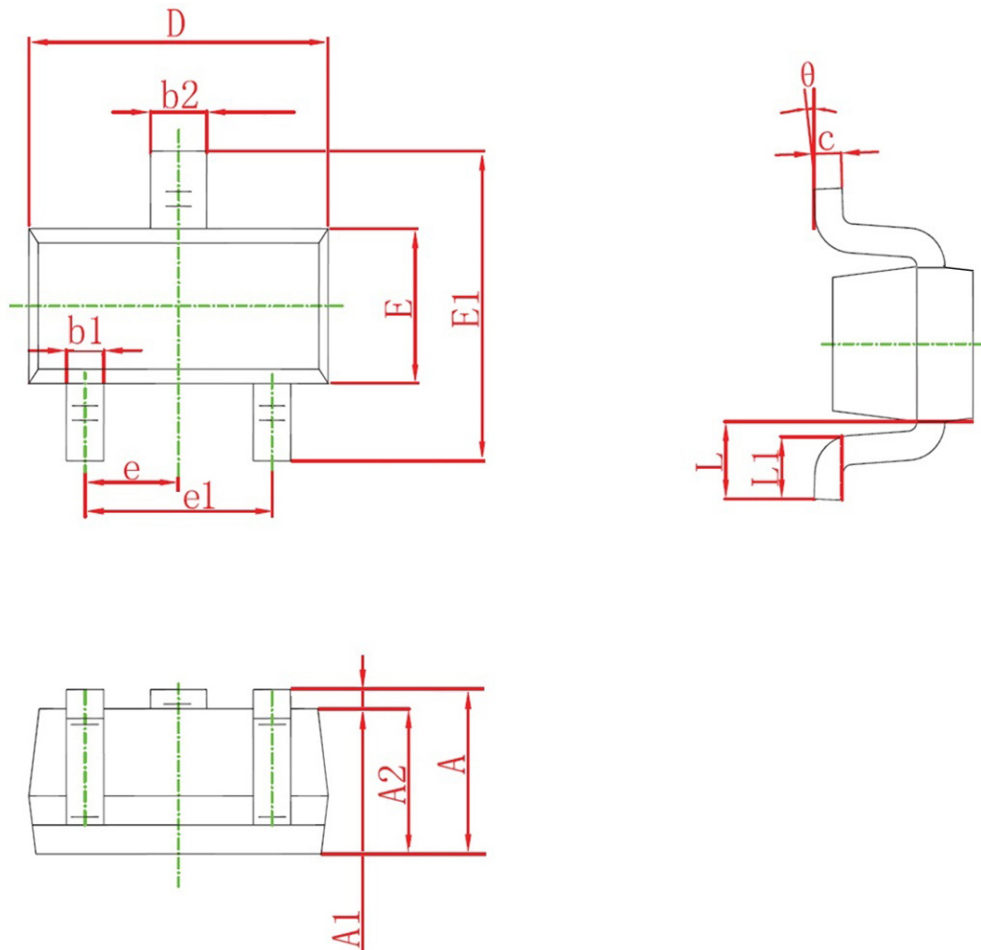

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°