


Features

- Low Current Leakage
- For General Purpose Switching Applications

BAR43	BAR43A	BAR43C	BAR43S
Marking:D95	Marking:DB1	Marking:DB2	Marking:DA5



SOT-23 top view



Halogen-Free

Maximum Ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{R(RMS)}$	RMS Reverse Voltage	21	V
V_{RRM}	Peak Repetitive Reverse Voltage	30	
V_{RWM}	Working Peak Reverse Voltage	30	
$I_{F(AV)}$	Average Rectified Forward Current	200	mA
I_{FSM}	Non-repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	0.75	A
P_D	Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	500	$^{\circ}\text{C/W}$
T_J	Operating Junction Temperature Range	-40 ~ +125	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55~ +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)}$	Reverse voltage	$I_R=100\mu\text{A}$	30	--	--	V
I_R	Reverse current	$V_R=25\text{V}$	--	--	0.5	μA
V_F	Forward voltage	$I_F=2\text{mA}$	0.26	--	0.33	V
		$I_F=15\text{mA}$	--	--	0.45	V
		$I_F=100\text{mA}$	--	--	0.8	V
t_{rr}	Reverse recovery time	$I_F=I_R=10\text{mA}$, $I_{tr}=0.1\times I_R$, $R_L=100\Omega$	--	--	5	ns

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BAR43	SOT-23	D95	3,000	45,000	180,000	7"reel
BAR43A	SOT-23	DB1	3,000	45,000	180,000	7"reel
BAR43C	SOT-23	DB2	3,000	45,000	180,000	7"reel
BAR43S	SOT-23	DA5	3,000	45,000	180,000	7"reel

Typical Operating Characteristics


Forward Characteristics

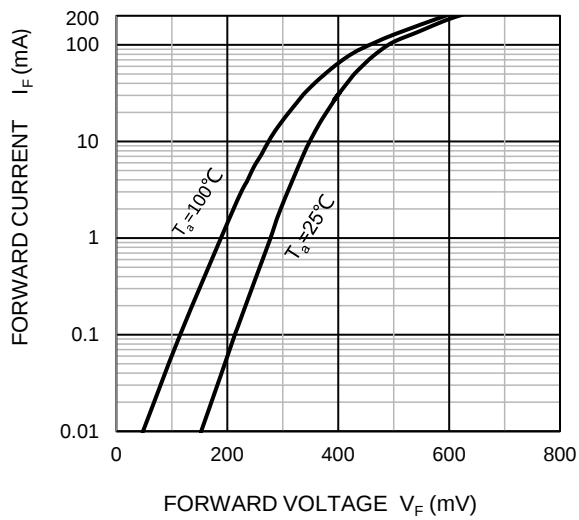


Reverse Characteristics

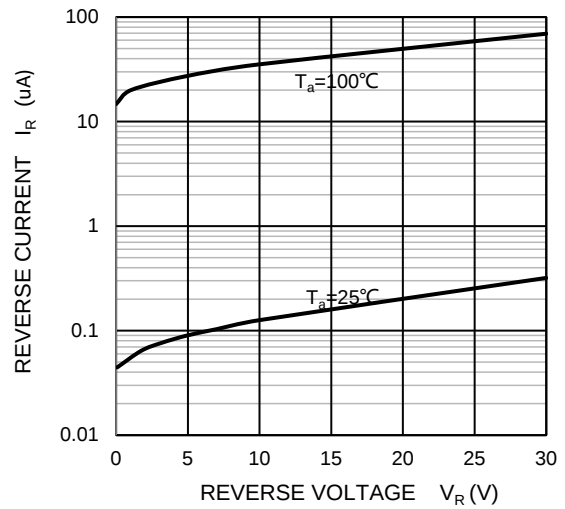


Capacitance Characteristics

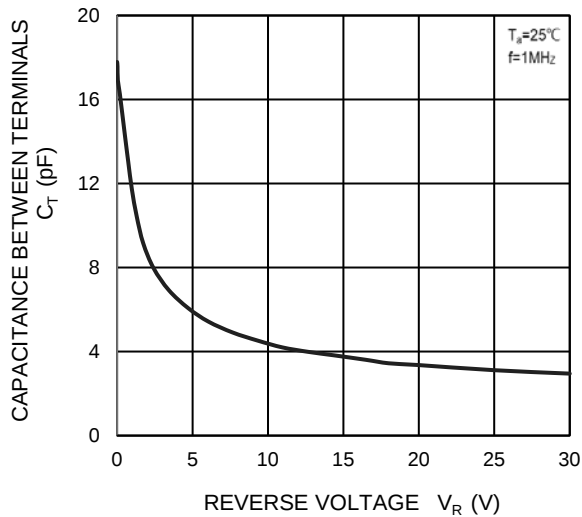

Power Derating Curve

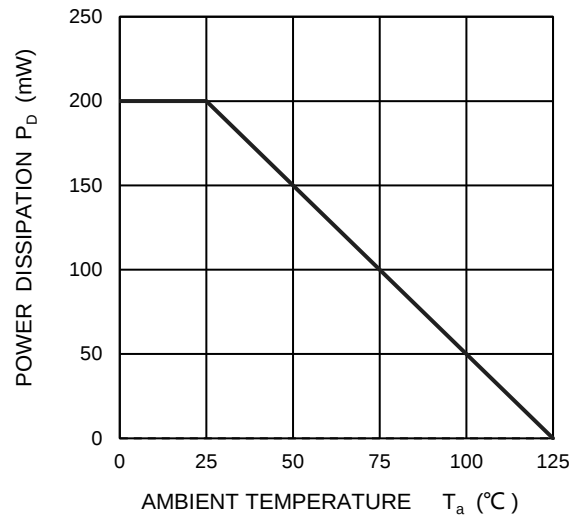

SOT-23 Package information

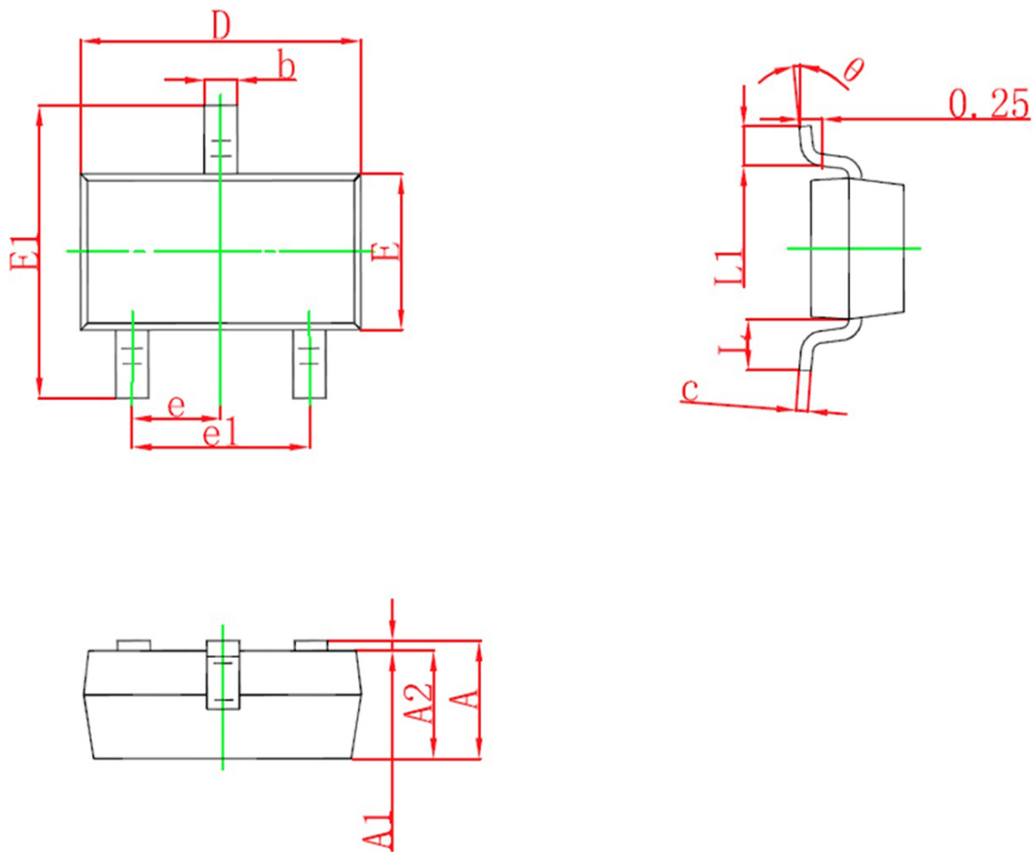

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°