


Features

- Low Voltage
- High Current
- Complement to BSR33

Application


- Thick and Thin-Film Circuits
- Telephony and General Industrial Applications



Marking and pin assignment



SOT-89-3L top view



Schematic diagram



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	90	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	1	A
P_C	Collector Power Dissipation	500	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	250	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C


Electrical Characteristics (Ta=25°C unless otherwise specified) *Pulse test

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	90	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	80	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=60V, I_E=0$	--	--	100	nA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V, I_C=0$	--	--	100	nA
$h_{fe(1)*}$	DC current gain	$V_{CE}=5V, I_C=0.1mA$	30	--	--	
$h_{fe(2)*}$		$V_{CE}=5V, I_C=100mA$	100	--	300	
$h_{fe(3)*}$		$V_{CE}=5V, I_C=500mA$	50	--	--	
$V_{CE(sat)*}$	Collector-emitter saturation voltage	$I_C=150mA, I_B=15mA$	--	--	0.25	V
	Collector-emitter saturation voltage	$I_C=500mA, I_B=50mA$	--	--	0.5	V
$V_{BE(sat)*}$	Base-emitter saturation voltage	$I_C=150mA, I_B=15mA$	--	--	1	V
$V_{BE(sat)*}$		$I_C=500mA, I_B=50mA$	--	--	1.2	V
f_T	Transition frequency	$V_{CE}=10V, I_C=50mA, f=100MHz$	100	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=10V, I_E=0, f=1MHz$	--	--	12	pF
C_{ib}	Emitter input capacitance	$V_{BE}=0.5V, I_C=0, f=1MHz$	--	--	90	pF

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BSR43	SOT-89-3L	AR4	1,000	10,000	40,000	7" reel

SOT-89-3L Package information

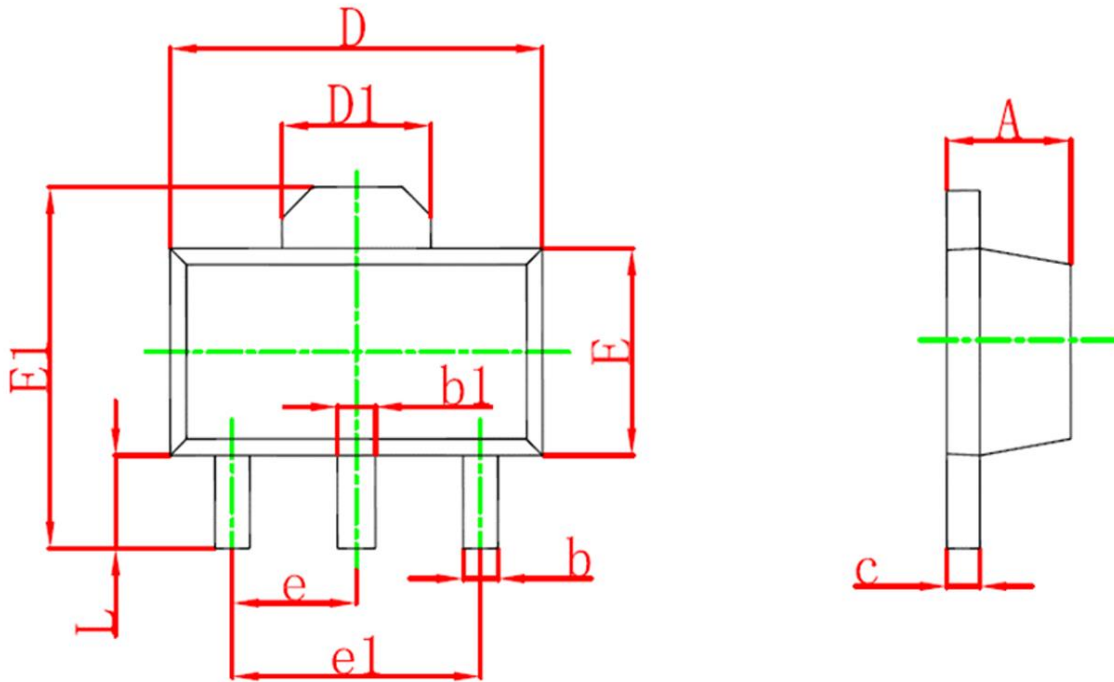

Symbol	Dimensions in Millimeters(mm)		Dimensions in Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047