

Features


- Fast switching capability
- Enhancement mode
- Logic level

Application

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)



Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
240V	7.7Ω@10V	0.11A
	9.07Ω@4.5V	



B131: Device code

Marking and pin assignment



Schematic diagram



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	240	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	$T_c=25^{\circ}C$ 0.11	A

Mounted on Large Heat Sink







I_{DM}	Pulse Drain Current Tested	$T_c=25^{\circ}C$ 0.4	A
I_D	Continuous Drain Current	$T_c=25^{\circ}C$ 0.11	A
P_D	Maximum Power Dissipation	$T_c=25^{\circ}C$ 0.5	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	150	°C/W

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BSS131	SOT-23	B131	3,000	45,000	180,000	7"reel

Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	240	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =240V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	0.8	--	1.8	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =0.1A	--	7.7	14	Ω
		V _{GS} =4.5V, I _D =0.09A	--	9.07	20	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	30	--	pF
C _{OSS}	Output Capacitance		--	8.5	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	1.6	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =120V, I _D =0.1A, V _{GS} =10V	--	5	--	nC
Q _{gs}	Gate Source Charge		--	1.5	--	nC
Q _{gd}	Gate Drain Charge		--	1.4	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =120V, I _D =0.1A, V _{GS} =10V, R _G =25Ω	--	2.2	--	nS
t _r	Turn-on Rise Time		--	36	--	nS
t _{d(off)}	Turn-Off Delay Time		--	18	--	nS
t _f	Turn-Off Fall Time		--	65	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=0.1A	--	--	1.2	V

Typical Operating Characteristics

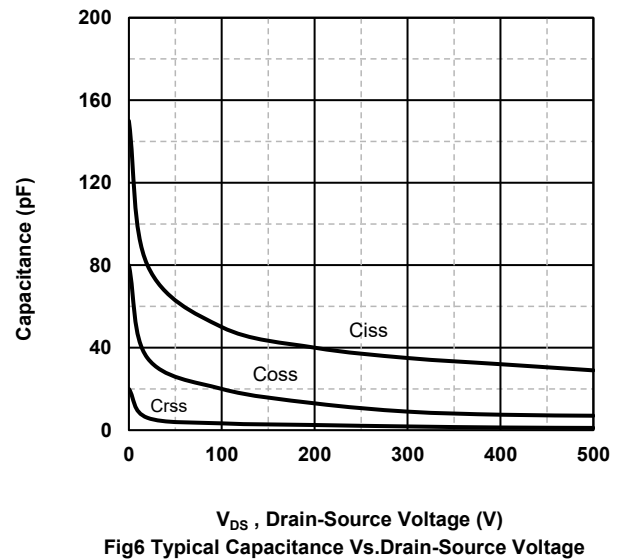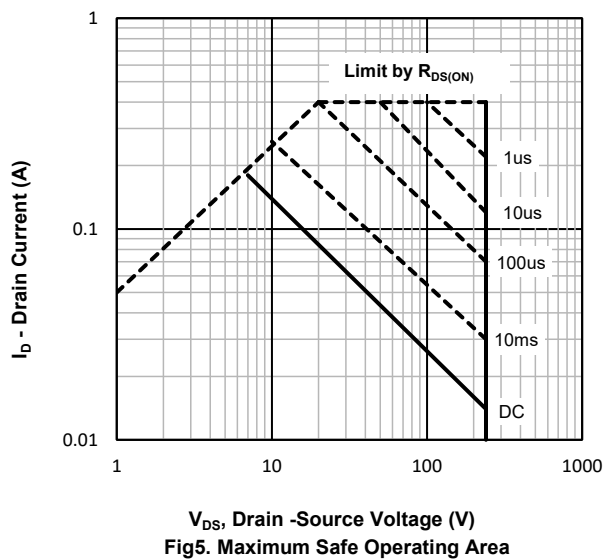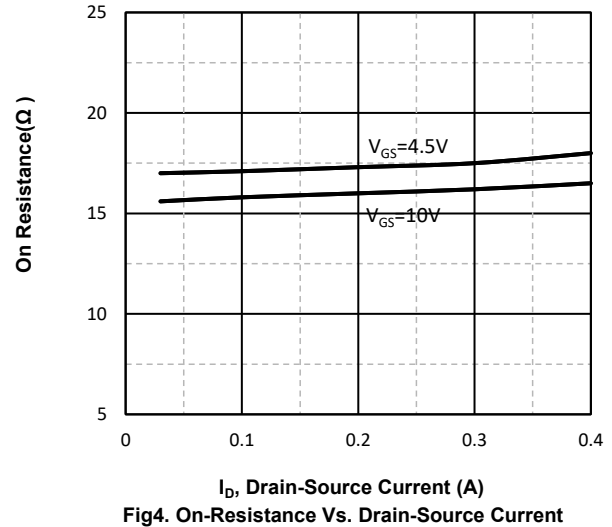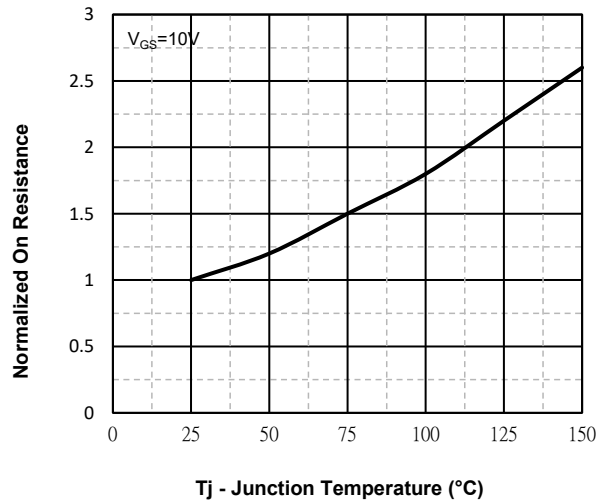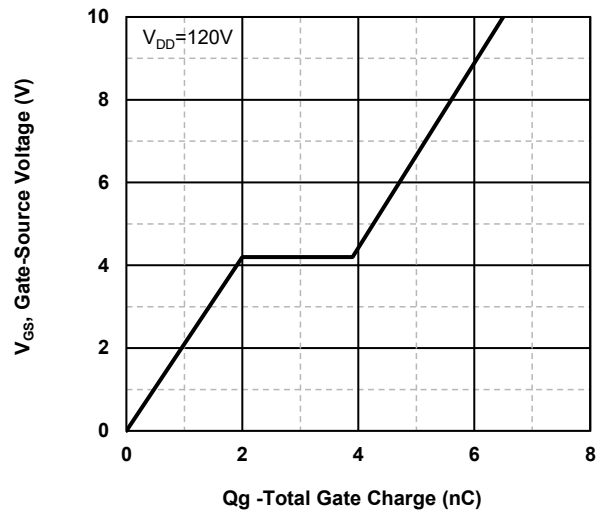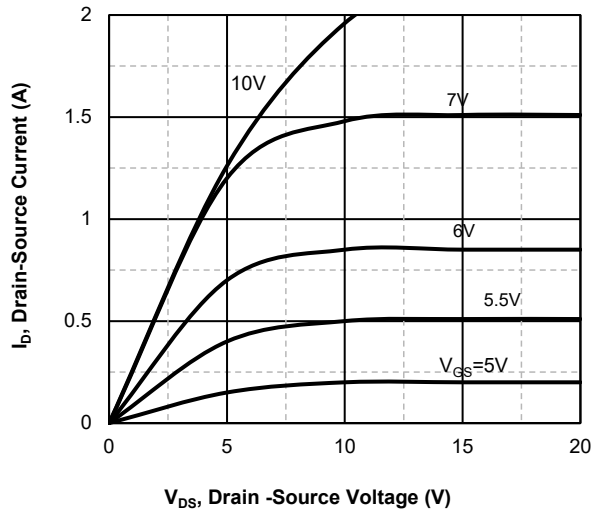

SOT-23 Package information

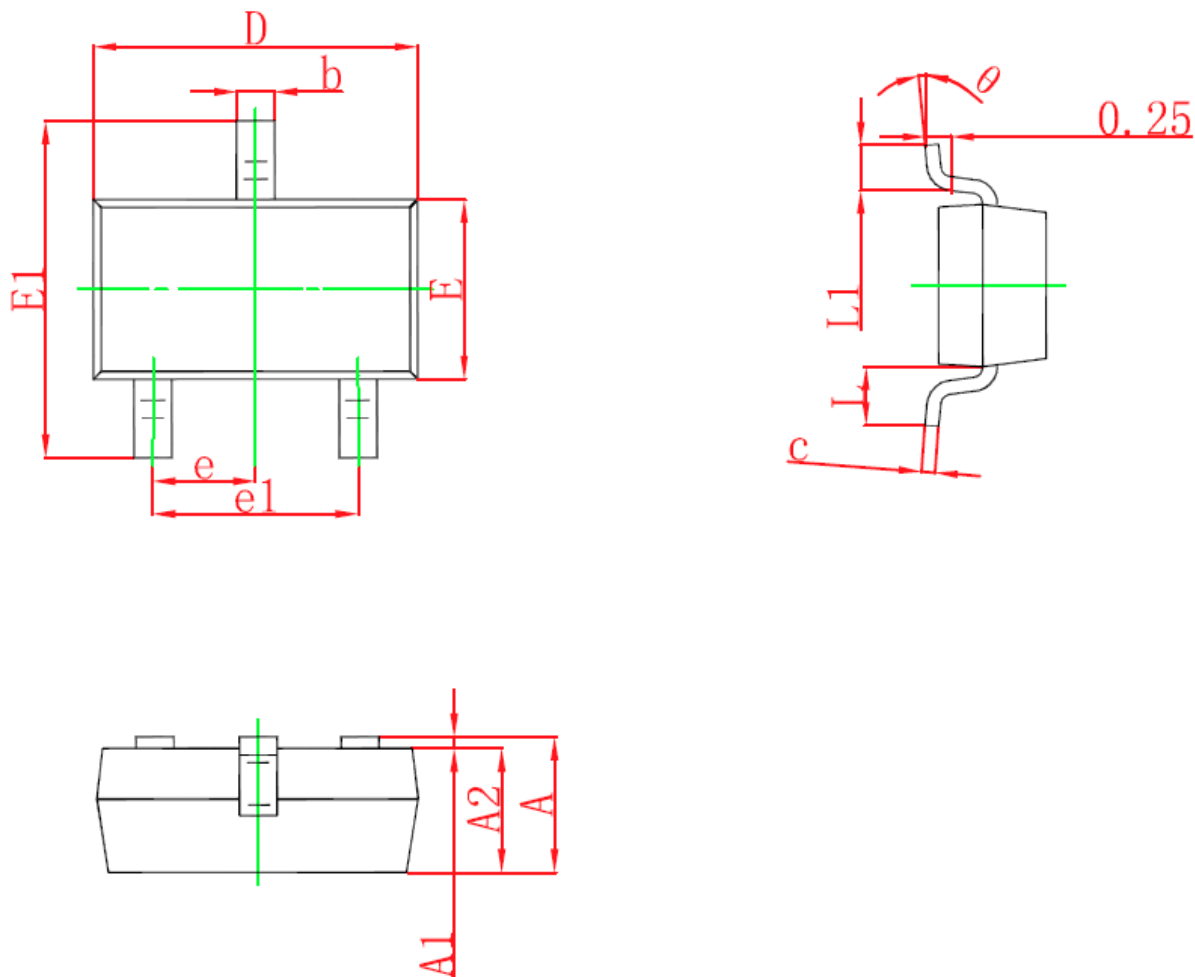

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°