

Features


- Advanced trench cell design
- High speed switch
- Low Gate Charge

Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
-60V	2Ω@-10V	-0.33A
	3Ω@-4.5V	



Application

- Portable appliances
- Video monitor



B83: Device code

Marking and pin assignment



Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V _{DS}	Drain-Source Breakdown Voltage		-60	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-50 to 150	°C
I _S	Diode Continuous Forward Current	Tc=25°C	-0.33	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$	-1.32	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$	-0.33	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$	0.36	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		350	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BSS83	SOT-23	B83	3,000	45,000	180,000	7"reel

Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV(BR)DSS	Drain-Source Breakdown Voltage	VGS=0V, ID=-250μA	-60	--	--	V
IDSS	Zero Gate Voltage Drain Current	VDS=-60V, VGS=0V	--	--	-1	μA
IGSS	Gate-Body Leakage Current	VGS=±20V, VDS=0V	--	--	±100	nA
VGS(th)	Gate Threshold Voltage	VDS=VGS, ID=-250μA	-1.0	-1.5	-2.0	V
RDS(on)	Drain-Source On-State Resistance	VGS=-10V, ID=-0.33A	--	1.4	2.0	Ω
		VGS=-4.5V, ID=-0.27A	--	2.0	3.0	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
CISS	Input Capacitance	VDS=-30V, VGS=0V, f=1MHz	--	60	--	pF
COSS	Output Capacitance		--	19	--	pF
CRSS	Reverse Transfer Capacitance		--	8	--	pF
Switching Characteristics						
Qg	Total Gate Charge	VDD=-30V, ID=-0.15A, VGS=-4.5V	--	1.77	--	nC
Qgs	Gate Source Charge		--	0.57	--	nC
Qgd	Gate Drain Charge		--	0.18	--	nC
td(on)	Turn-on Delay Time	VDD=-30V, ID=-0.15A, VGS=-4.5V, RG=2.5Ω	--	2.5	--	nS
tr	Turn-on Rise Time		--	1	--	nS
td(off)	Turn-Off Delay Time		--	16	--	nS
tf	Turn-Off Fall Time		--	8	--	nS
Source- Drain Diode Characteristics						
VSD	Forward on voltage	TJ=25°C, IS=-0.33A	--	--	-1.2	V

Typical Operating Characteristics

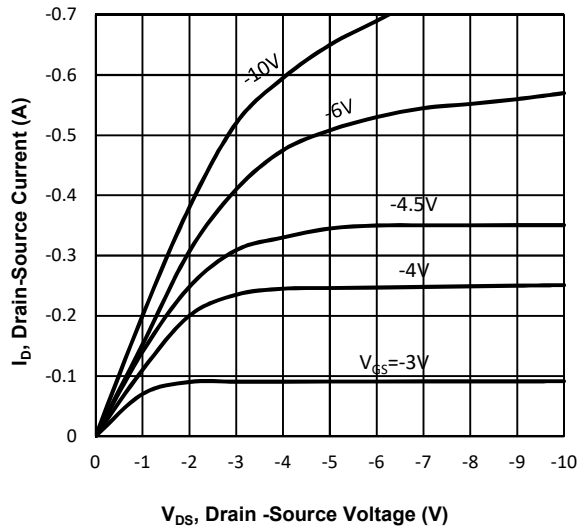


Fig1. Typical Output Characteristics

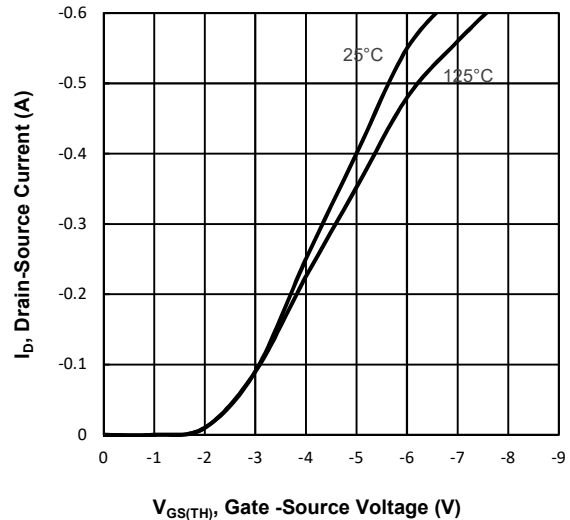


Fig2. Typical Transfer Characteristics

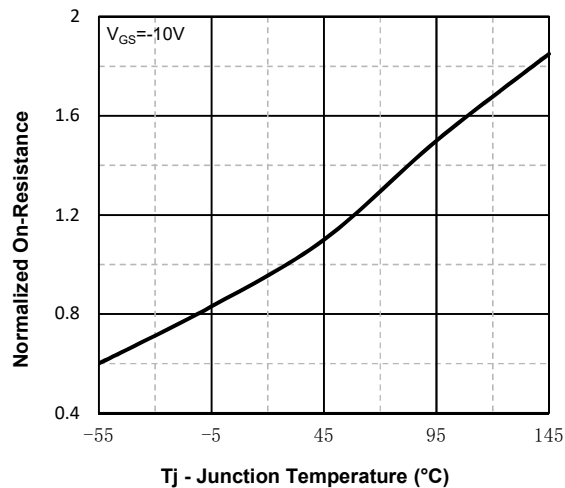


Fig3. Normalized On-Resistance Vs. Temperature

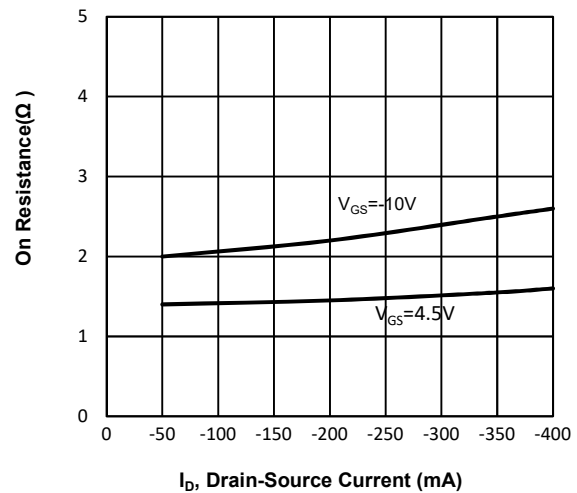


Fig4. On Resistance Vs. Drain-Source Current

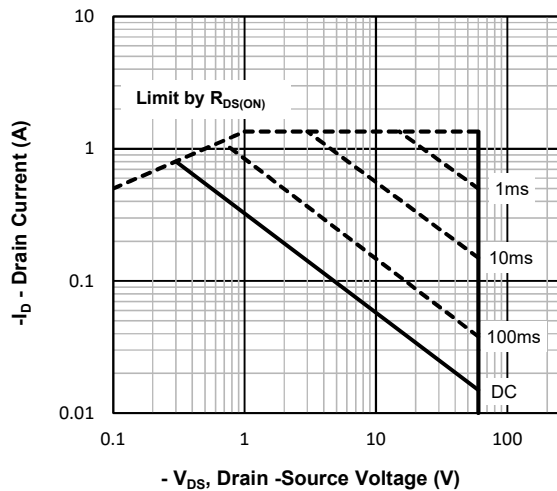


Fig5. Maximum Safe Operating Area


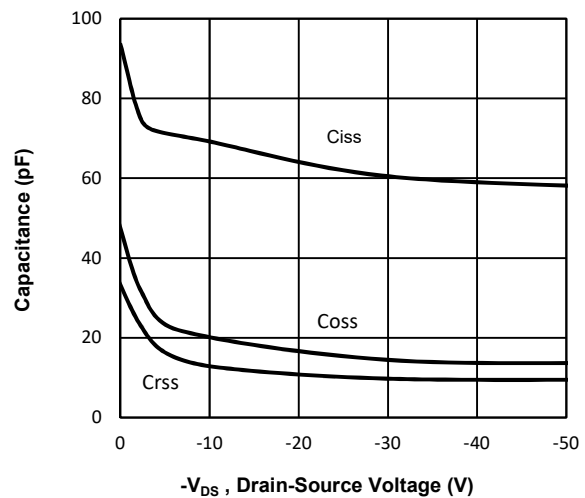


Fig6. Typical Capacitance Vs. Drain-Source Voltage

SOT-23 Package information

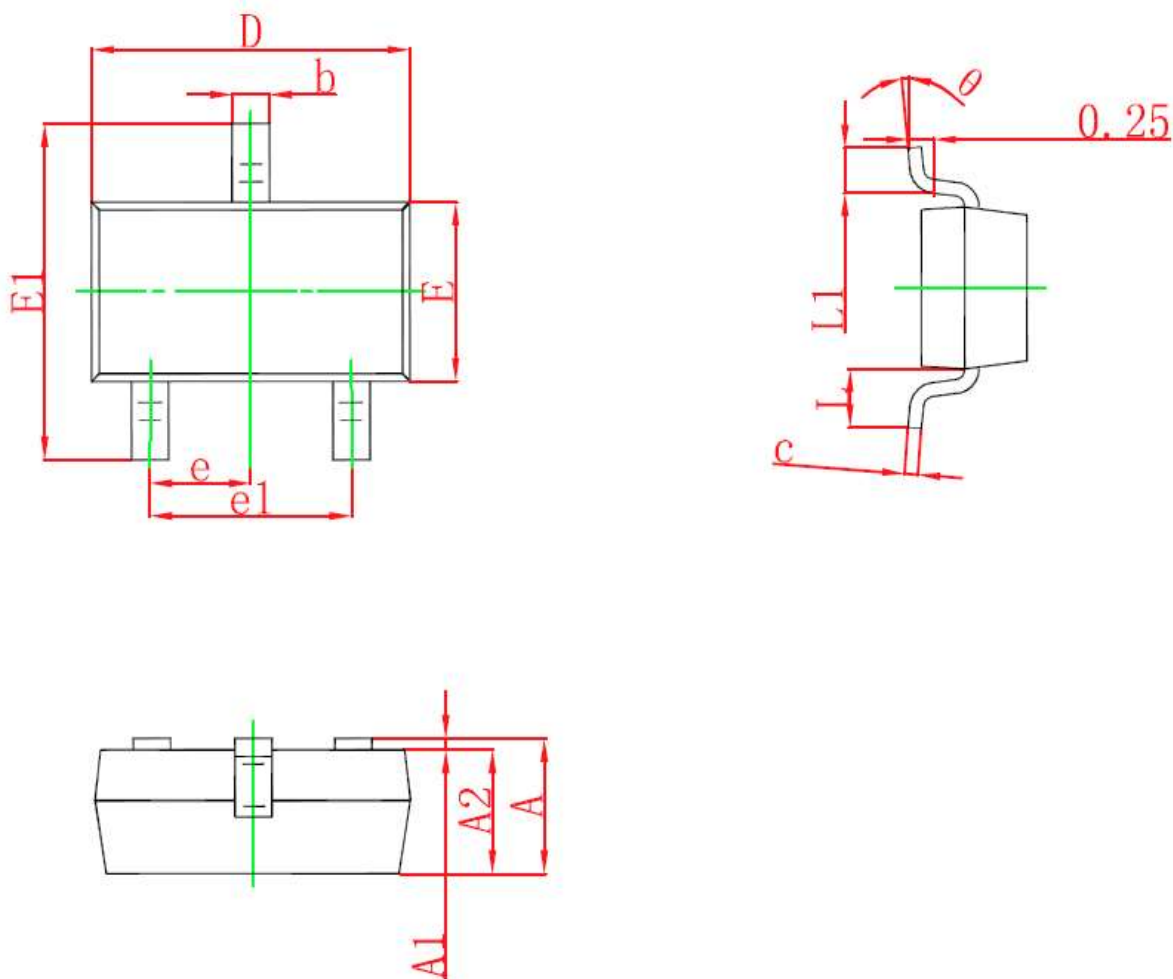

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°