



Features


- Excellent h_{FE} Linearity
- Low noise
- Complementary to A733



Marking and pin assignment



SOT-23 top view



Schematic diagram



Halogen-Free

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	150	mA
P_C	Collector Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	625	$^{\circ}\text{C/W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
C945	SOT-23	CR	3,000	45,000	180,000	7"reel







ELECTRICAL CHARACTERISTICS(Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	60	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	50	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=60V, I_E=0$	--	--	0.1	μA
I_{CER}	Collector cut-off current	$V_{EB}=55V, R=10M\Omega$	--	--	0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V, I_C=0$	--	--	0.1	μA
$h_{FE(1)}$	DC current gain	$V_{CE}=6V, I_C=1mA$	130	--	400	
$h_{FE(2)}$		$V_{CE}=6V, I_C=0.1mA$	40	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=100mA, I_B=10mA$	--	--	0.3	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=100mA, I_B=10mA$	--	--	1	V
f_T	Transition frequency	$V_{CE}=6V, I_C=10mA, f=30MHz$	150	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=10V, I_E=0, f=1MHz$	--	--	3	pF
N_F	Noise Figure	$V_{CE}=6V, I_C=0.1mA, R_g=10k\Omega, f=1kHz$	--	4	10	dB


Classification of $h_{FE(1)}$

Rank	L	H
Range	130-200	200-400

Typical Operating Characteristics

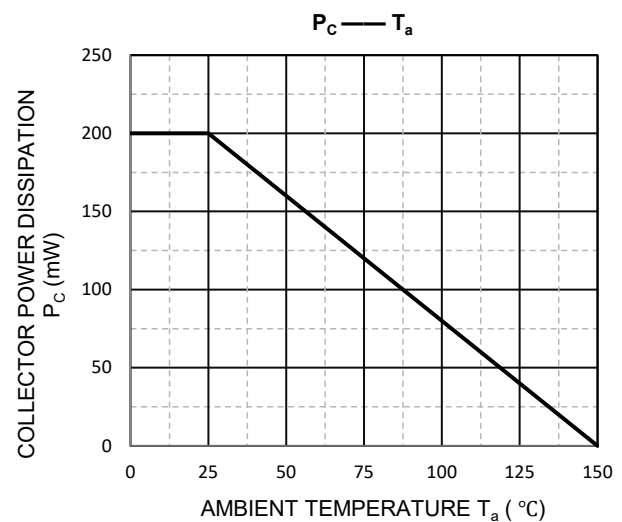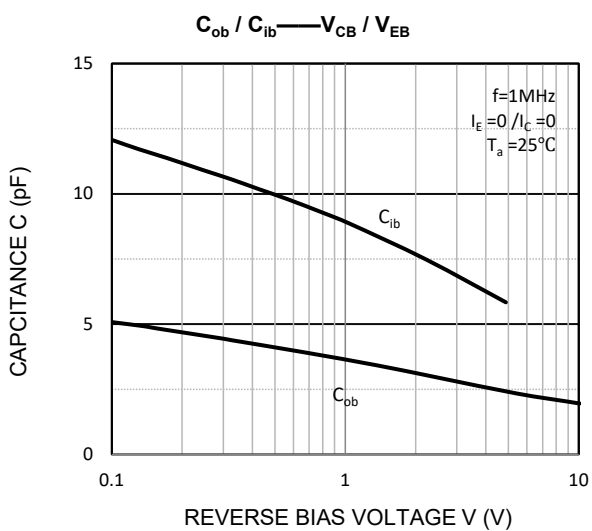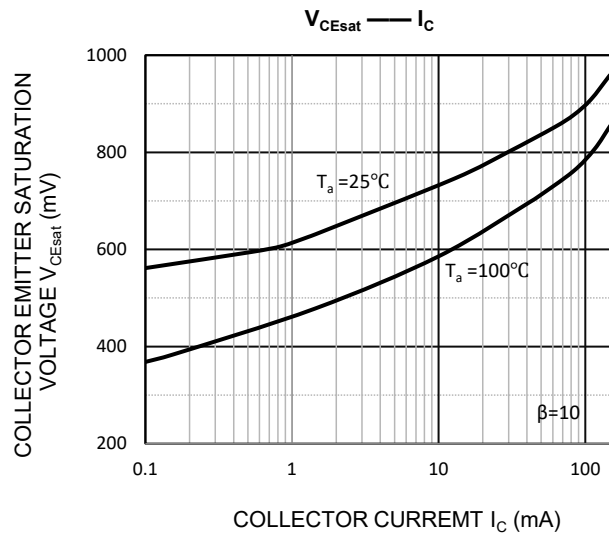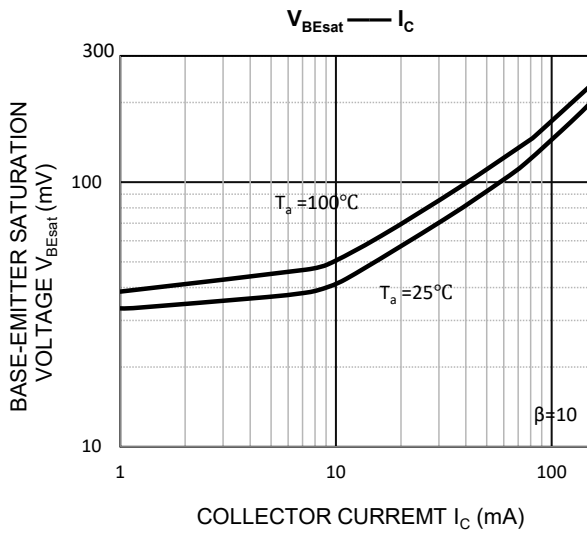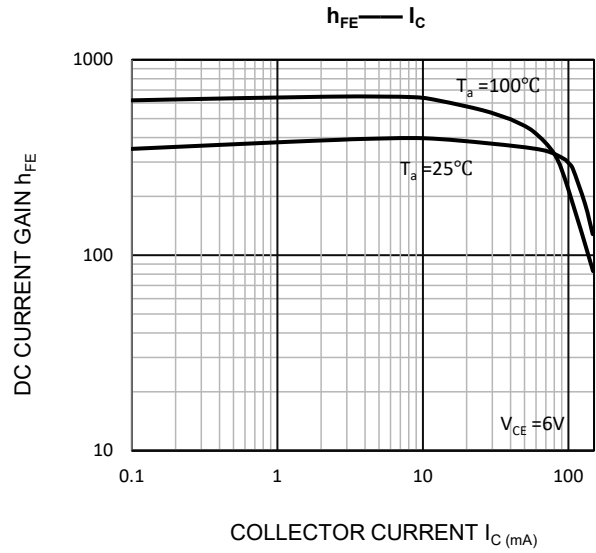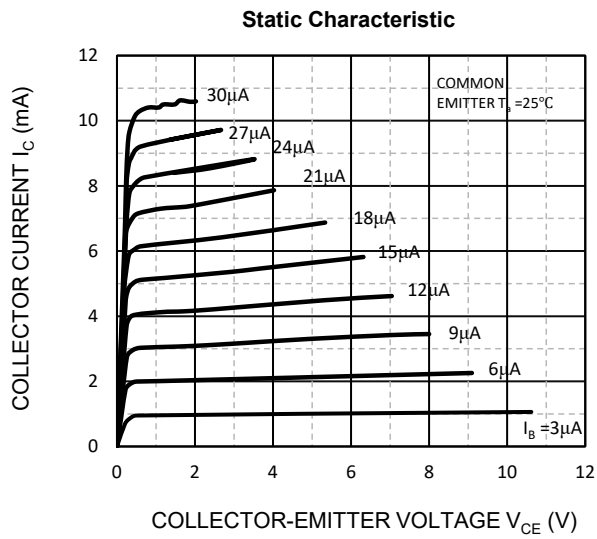

SOT-23 Package information

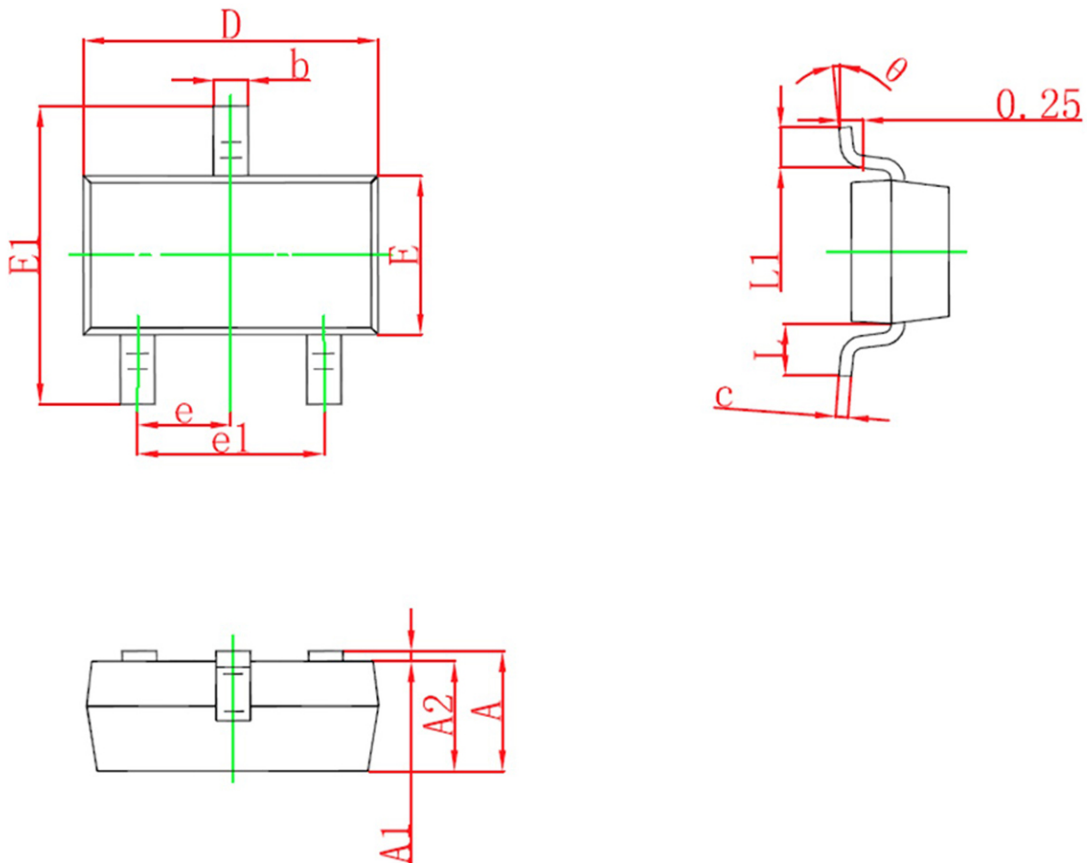

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°