


Features


- Extremely low saturation voltage
- Complementary NPN type: FMMT618

Application


- Gate Driving MOSFETs and IGBTs
- DC-DC converters
- Charging circuit



SOT-23 top view



Schematic diagram



Marking and pin assignment



Pb-Free



RoHS



HAL

Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-20	V
V _{CEO}	Collector-Emitter Voltage	-20	V
V _{EBO}	Emitter-Base Voltage	-7	V
I _c	Collector Current -Continuous	-1.5	A
I _B	Base Current	-0.5	A
P _c	Collector Power Dissipation	350	mW
R _{θJA}	Thermal Resistance Junction to Ambient	357	°C/W
T _J , T _{STG}	Operating and Storage Temperature Range	-55~ +150	°C

Ordering Information (Example)







Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
FMMT718	SOT-23	718	3,000	45,000	180,000	7" reel



Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-100\mu A, I_E=0$	-20	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-10mA, I_B=0$	-20	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=-100\mu A, I_C=0$	-7	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=-15V, I_E=0$	--	--	-0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=-4V, I_C=0$	--	--	-0.1	μA
I_{CES}	Collector cut-off current	$V_{CES}=-15V, I_E=0$	--	--	-0.1	μA
h_{FE1}^*	DC current gain	$V_{CE}=-2V, I_C=-10mA$	300	--	--	
h_{FE2}^*		$V_{CE}=-2V, I_C=-100mA$	300	600	--	
h_{FE3}^*		$V_{CE}=-2V, I_C=-2A$	150	--	--	
h_{FE4}^*		$V_{CE}=-2V, I_C=-4A$	35	--	--	
$V_{CE(sat)1}^*$	Collector-emitter saturation voltage	$I_C=-0.1A, I_B=-10mA$	--	--	-40	mV
$V_{CE(sat)2}^*$		$I_C=-1A, I_B=-20mA$	--	--	-200	mV
$V_{CE(sat)3}^*$		$I_C=-1.5A, I_B=-50mA$	--	--	-220	mV
$V_{BE(sat)}^*$	Base-emitter saturation voltage	$I_C=-1.5A, I_B=-50mA$	--	--	-1	V
$V_{BE(on)}^*$	Base-emitter voltage	$V_{CE}=-2V, I_C=2A$	--	--	-1	V
f_T	Transition frequency	$V_{CE}=-10V, I_C=-50mA, f=100MHz$	150	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=-10V, f=1MHz$	--	--	30	pF
$t_{(on)}$	Turn-on Time	$V_{CC}=-10V, I_C=-1A, I_{B1}=I_{B2}=-20mA$	--	40	--	ns
$t_{(off)}$	Turn-off Time		--	670	--	ns


*Measured under pulse conditions . Pulse width =300 μs . Duty cycle≤2%.

Typical Operating Characteristics

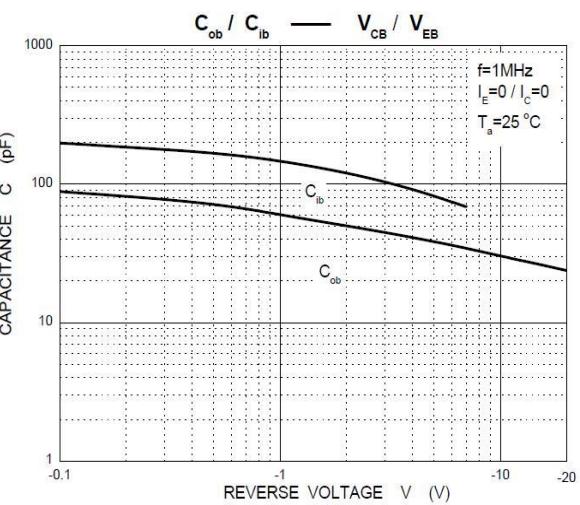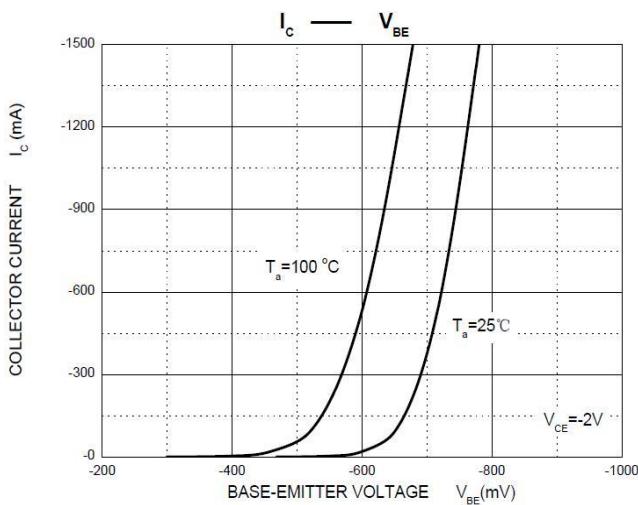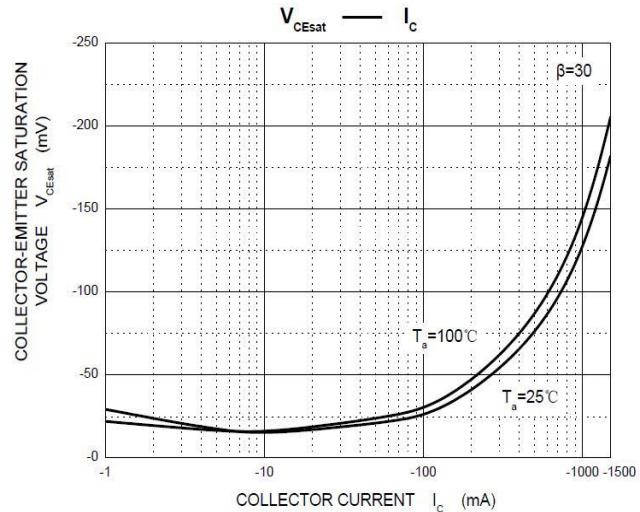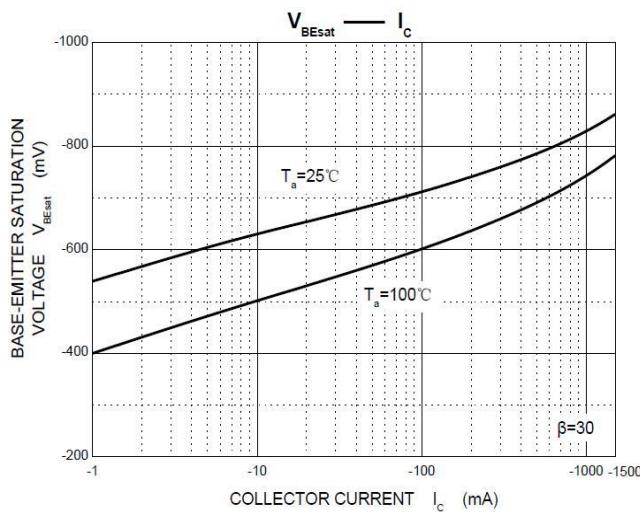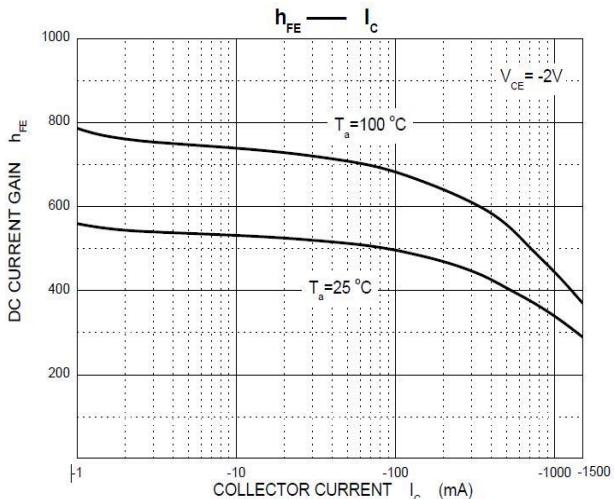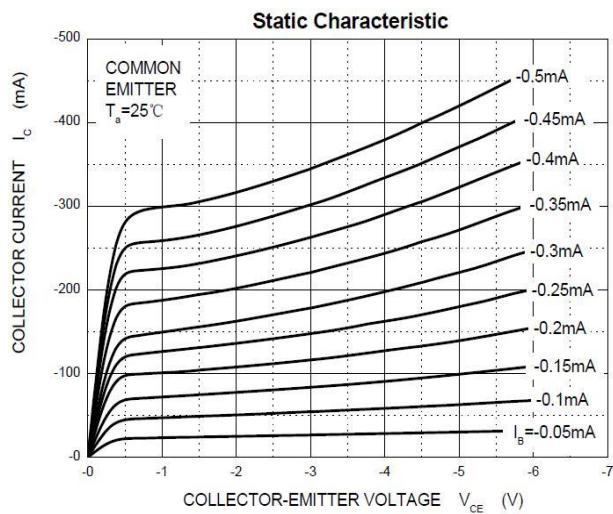

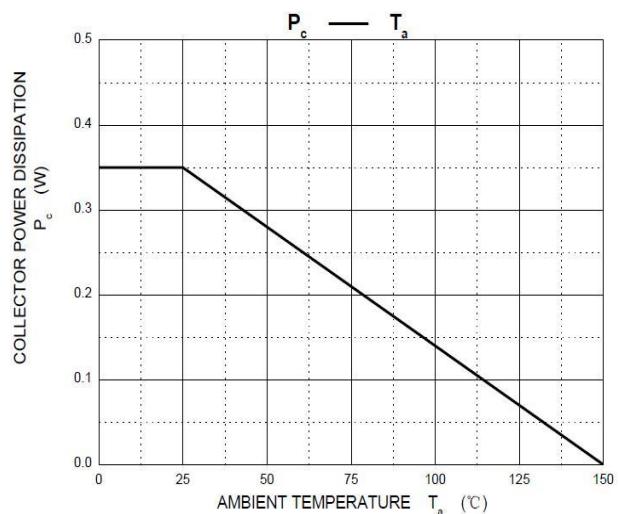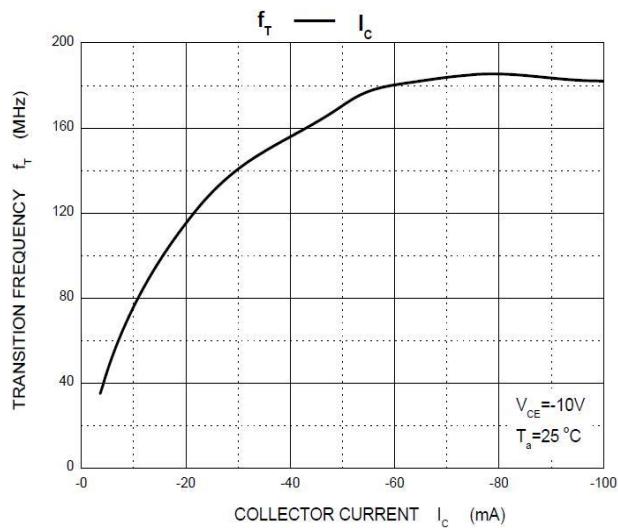

SOT-23 Package information

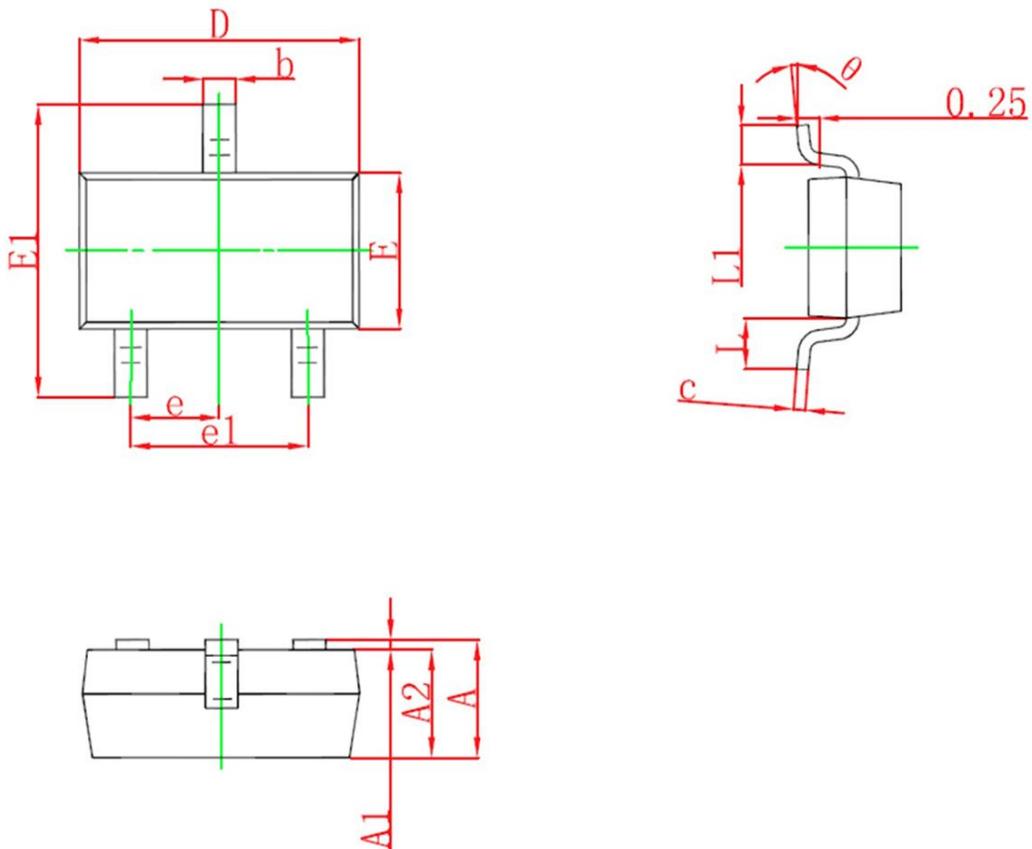

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°