

## Features


- Wide Bandgap SiC MOSFET Technology
- Low On-Resistance with High Blocking Voltage
- Low Capacitances with High-Speed Switching
- Low Reverse Recovery(Qrr)
- Easy to Parallel and Simple to Drive

## Product Summary

| $V_{DS}$ | $R_{DS(ON)}$ TYP | $I_D$ |
|----------|------------------|-------|
| 750V     | 380mΩ@15V        | 11A   |

## Application

- Power Factor Correction Modules
- Switch Mode Power Supplies
- DC-AC Inverters
- High Voltage DC/DC Converters

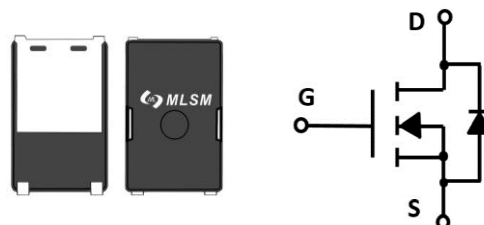

TOLL-4L



Halogen-Free

## Absolute Maximum Ratings (TA=25°C unless otherwise noted)

| Symbol                                                 | Parameter                                       | Rating         | Unit |
|--------------------------------------------------------|-------------------------------------------------|----------------|------|
| <b>Common Ratings (TC=25°C Unless Otherwise Noted)</b> |                                                 |                |      |
| $V_{DS}$                                               | Drain-Source Breakdown Voltage                  | 750            | V    |
| $V_{GS}$                                               | Gate-Source Voltage                             | -10/+22        | V    |
| $V_{GSop}$                                             | Recommended Operation Voltage of Gate to Source | 0/+15          | V    |
| $T_J, T_{STG}$                                         | Operating and Storage Temperature Range         | -55 to 175     | °C   |
| $I_S$                                                  | Diode Continuous Forward Current                | Tc=25°C<br>11  | A    |
| $I_{DM}$                                               | Pulse Drain Current Tested                      | Tc=25°C<br>22  | A    |
|                                                        |                                                 | Tc=175°C<br>18 | A    |
| $I_D$                                                  | Continuous Drain Current                        | Tc=25°C<br>11  | A    |
|                                                        |                                                 | Tc=175°C<br>9  | A    |
| $P_D$                                                  | Maximum Power Dissipation                       | Tc=25°C<br>24  | W    |
| $E_{AS}$                                               | Single Pulsed Avalanche Energy                  | 110            | mJ   |
| $R_{th(j-c)}$                                          | Thermal Resistance from Junction-Case           | 6.25           | °C/W |

## Ordering Information (Example)

| Type     | Package | Marking  | Minimum Package(pcs) | Inner Box Quantity(pcs) | Outer Carton Quantity(pcs) | Delivery Mode |
|----------|---------|----------|----------------------|-------------------------|----------------------------|---------------|
| ML380C7F | TOLL-4L | ML380C7F | 2,500                | 5,000                   | 35,000                     | 13"reel       |

| Electrical Characteristics (TJ=25℃ unless otherwise noted)              |                                  |                                                                                              |     |      |     |      |
|-------------------------------------------------------------------------|----------------------------------|----------------------------------------------------------------------------------------------|-----|------|-----|------|
| Symbol                                                                  | Parameter                        | Condition                                                                                    | Min | Typ  | Max | Unit |
| Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)  |                                  |                                                                                              |     |      |     |      |
| BV <sub>(BR)DSS</sub>                                                   | Drain-Source Breakdown Voltage   | V <sub>GS</sub> =0V, I <sub>D</sub> =500μA                                                   | 750 | 900  | --  | V    |
| I <sub>DSS</sub>                                                        | Zero Gate Voltage Drain Current  | V <sub>DS</sub> =750V, V <sub>GS</sub> =0V                                                   | --  | --   | 10  | μA   |
| I <sub>GSS</sub>                                                        | Gate-Body Leakage Current        | V <sub>GS</sub> =18V, V <sub>DS</sub> =0V                                                    | --  | --   | 250 | nA   |
| V <sub>GS(th)</sub>                                                     | Gate Threshold Voltage           | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =1.8mA                                     | 3.0 | --   | 5.0 | V    |
| R <sub>DS(on)</sub>                                                     | Drain-Source On-State Resistance | V <sub>GS</sub> =18V, I <sub>D</sub> =5A                                                     | --  | 260  | --  | mΩ   |
|                                                                         |                                  | V <sub>GS</sub> =18V, I <sub>D</sub> =5A, Tj=175℃                                            | --  | 270  | --  | mΩ   |
|                                                                         |                                  | V <sub>GS</sub> =15V, I <sub>D</sub> =5A                                                     | --  | 380  | 500 | mΩ   |
|                                                                         |                                  | V <sub>GS</sub> =15V, I <sub>D</sub> =5A, Tj=175℃                                            | --  | 325  | --  | mΩ   |
| Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated) |                                  |                                                                                              |     |      |     |      |
| C <sub>ISS</sub>                                                        | Input Capacitance                | V <sub>DS</sub> =500V, V <sub>GS</sub> =0V, f=1MHz                                           | --  | 254  | --  | pF   |
| C <sub>OSS</sub>                                                        | Output Capacitance               |                                                                                              | --  | 20.2 | --  | pF   |
| C <sub>RSS</sub>                                                        | Reverse Transfer Capacitance     |                                                                                              | --  | 2.4  | --  | pF   |
| Switching Characteristics                                               |                                  |                                                                                              |     |      |     |      |
| Q <sub>g</sub>                                                          | Total Gate Charge                | V <sub>DS</sub> =500V, I <sub>D</sub> =5A,<br>V <sub>GS</sub> =0/15V                         | --  | 21.3 | --  | nC   |
| Q <sub>gs</sub>                                                         | Gate Source Charge               |                                                                                              | --  | 6.7  | --  | nC   |
| Q <sub>gd</sub>                                                         | Gate Drain Charge                |                                                                                              | --  | 11.5 | --  | nC   |
| t <sub>d(on)</sub>                                                      | Turn-on Delay Time               | V <sub>DD</sub> =500V, I <sub>D</sub> =5A,<br>V <sub>GS</sub> =0/15V, R <sub>G</sub> =10Ω    | --  | 24   | --  | nS   |
| t <sub>r</sub>                                                          | Turn-on Rise Time                |                                                                                              | --  | 42   | --  | nS   |
| t <sub>d(off)</sub>                                                     | Turn-Off Delay Time              |                                                                                              | --  | 26.8 | --  | nS   |
| t <sub>f</sub>                                                          | Turn-Off Fall Time               |                                                                                              | --  | 76   | --  | nS   |
| R <sub>g</sub>                                                          | Gate Resistance                  | V <sub>AC</sub> =25mV, f=1MHz                                                                | --  | 14.3 | --  | Ω    |
| Source- Drain Diode Characteristics                                     |                                  |                                                                                              |     |      |     |      |
| V <sub>SD</sub>                                                         | Forward on voltage               | Tj=25℃, I <sub>S</sub> =3A                                                                   | --  | 3.5  | --  | V    |
| I <sub>S</sub>                                                          | Continuous Diode Forward Current | V <sub>GS</sub> =0V, Tj=25℃                                                                  | --  | 11   | --  | A    |
| t <sub>rr</sub>                                                         | Reverse Recovery Time            | V <sub>GS</sub> = 0V, I <sub>SD</sub> =5A,<br>V <sub>R</sub> =500V, di/dt=530A/us,<br>Tj=25℃ | --  | 17.8 | --  | ns   |
| Q <sub>rr</sub>                                                         | Reverse Recovery Charge          |                                                                                              | --  | 33.7 | --  | nC   |
| I <sub>rrm</sub>                                                        | Peak Reverse Recovery Current    |                                                                                              | --  | 3.5  | --  | A    |

## Typical Operating Characteristics

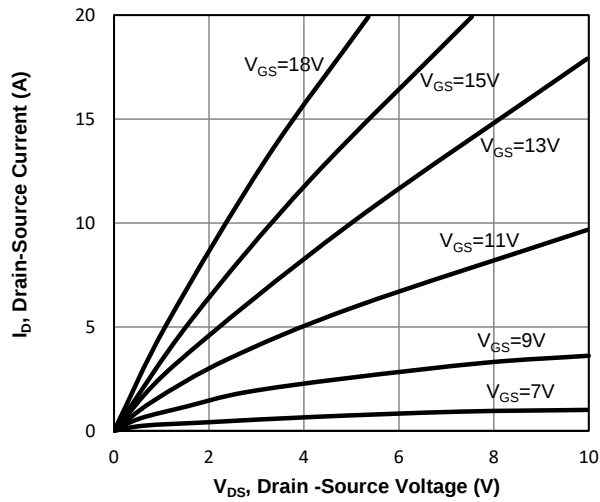


Fig1. Typical Output Characteristics

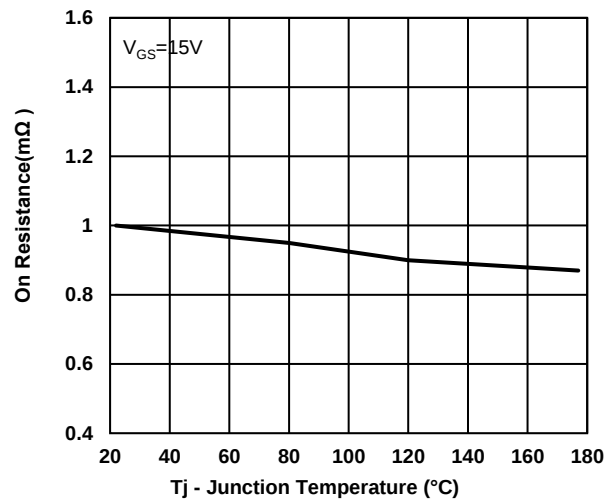


Fig2. Normalized On-Resistance Vs. Temperature

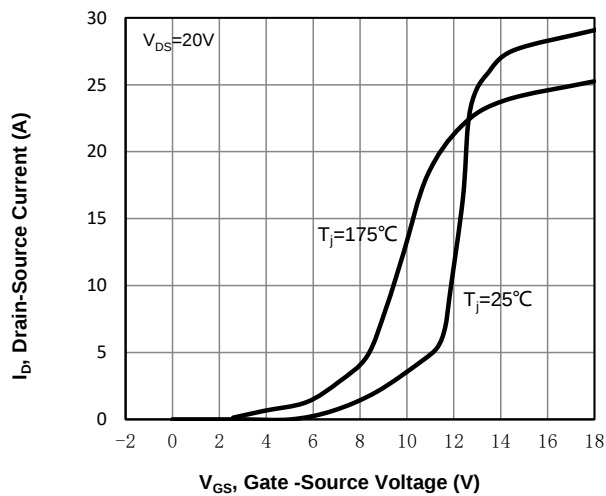


Fig3. Typical Transfer Characteristics

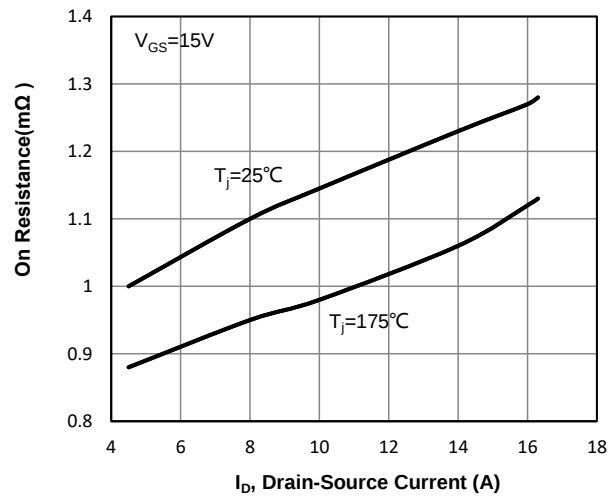


Fig4. On-Resistance Vs. Drain-Source Current

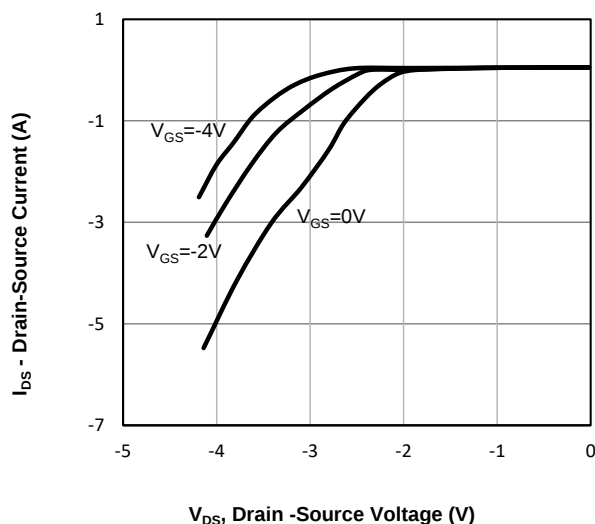


Fig5. Body Diode Characteristics

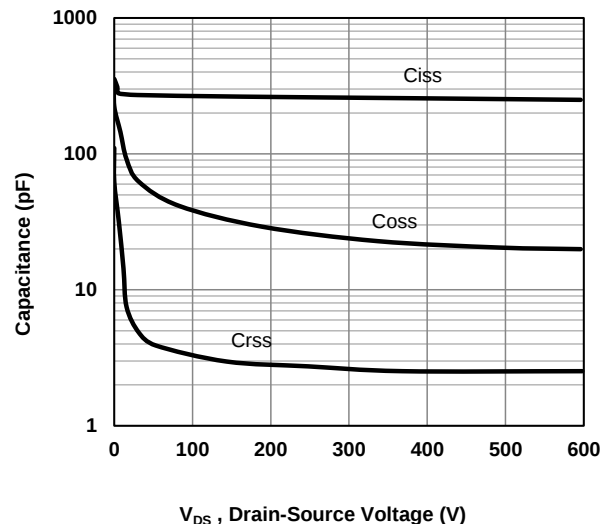
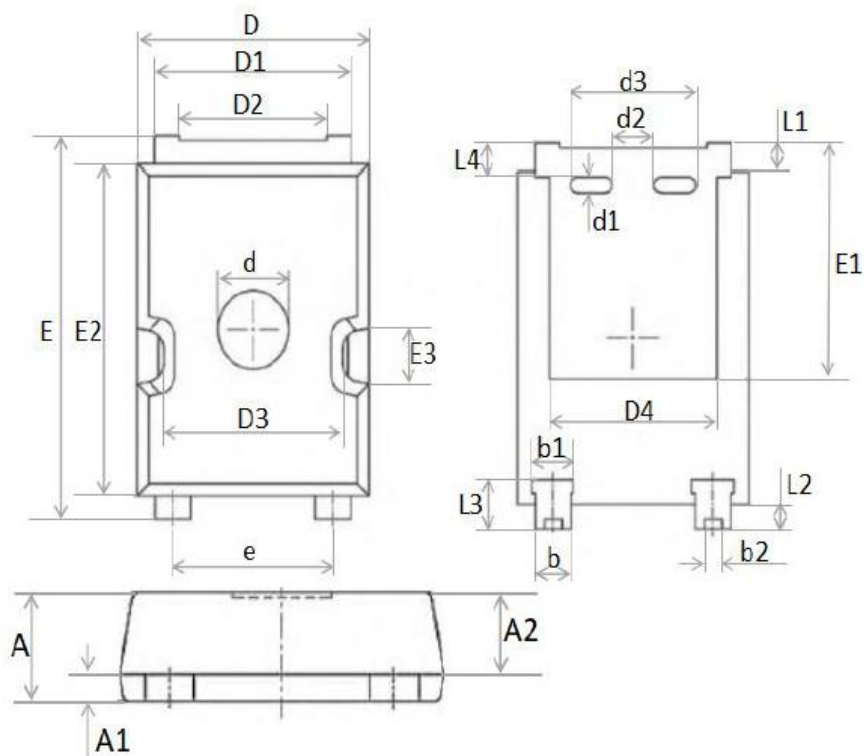


Fig6 Typical Capacitance Vs. Drain-Source

**TOLL-4L Package information**


| Symbol | Dimensions in Millimeters(mm) |        | Dimensions In Inches |       |
|--------|-------------------------------|--------|----------------------|-------|
|        | Min                           | Max    | Min                  | Max   |
| A      | 1.900                         | 2.100  | 0.074                | 0.082 |
| A1     | 0.400                         | 0.600  | 0.015                | 0.023 |
| A2     | 1.400                         | 1.600  | 0.055                | 0.062 |
| b      | 0.900                         | 1.100  | 0.035                | 0.043 |
| b1     | 1.090                         | 1.290  | 0.430                | 0.051 |
| b2     | 0.400                         | 0.600  | 0.016                | 0.024 |
| D      | 6.500                         | 6.700  | 0.256                | 0.264 |
| D1     | 5.500                         | 5.700  | 0.217                | 0.224 |
| D2     | 4.100                         | 4.300  | 0.161                | 0.169 |
| D3     | 5.000                         | 5.200  | 0.196                | 0.204 |
| D4     | 4.700                         | 4.900  | 0.185                | 0.192 |
| d      | 2.000REF                      |        | 0.07874REF           |       |
| d1     | 0.400                         | 0.600  | 0.016                | 0.024 |
| d2     | 1.000                         | 1.200  | 0.039                | 0.047 |
| d3     | 3.600                         | 3.800  | 0.141                | 0.149 |
| E      | 9.800                         | 10.000 | 0.385                | 0.393 |
| E1     | 5.900                         | 6.200  | 0.232                | 0.244 |
| E2     | 8.500                         | 8.700  | 0.335                | 0.343 |
| E3     | 1.400REF                      |        | 0.05511REF           |       |
| e      | 4.470                         | 4.670  | 0.176                | 0.184 |
| L1     | 0.600                         | 0.800  | 0.024                | 0.031 |
| L2     | 0.500                         | 0.700  | 0.020                | 0.028 |
| L3     | 1.100                         | 1.400  | 0.043                | 0.055 |
| L4     | 0.700                         | 0.900  | 0.028                | 0.035 |