

**Features**


- Leading trench technology for low  $R_{DS(on)}$
- Extending battery life

**Product Summary**

$V_{DS}$	$R_{DS(on)}$ MAX	$I_D$ MAX
-20V	100mΩ@-4.5V	-2A
	140mΩ@-2.5V	


**Application**

- High side load switch
- Charging circuit
- Single cell battery applications such as cell phones, digital cameras ,PDAs, etc

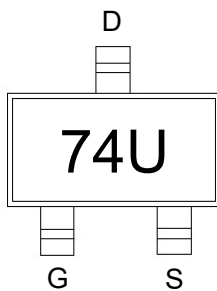


74U: Device code

Marking and pin assignment

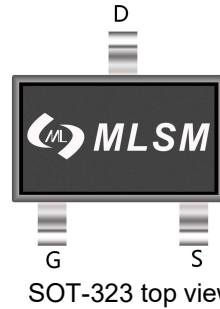

SOT-323 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

**Absolute Maximum Ratings (TA=25°C unless otherwise noted)**

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

**Common Ratings (TC=25°C Unless Otherwise Noted)**

$V_{DS}$	Drain-Source Breakdown Voltage	-20	V
$V_{GS}$	Gate-Source Voltage	±10	V
$T_J$	Maximum Junction Temperature	150	°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$I_S$	Diode Continuous Forward Current	$T_c=25^\circ\text{C}$ -2	A

**Mounted on Large Heat Sink**


$I_{DM}$	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$ -5	A
$I_D$	Continuous Drain Current	$T_c=25^\circ\text{C}$ -2	A
$P_D$	Maximum Power Dissipation	$T_c=25^\circ\text{C}$ 0.7	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient	125	°C/W

**Ordering Information (Example)**


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLS2101W	SOT-323	74U	3,000	45,000	180,000	7" reel

Electrical Characteristics (T <sub>J</sub> =25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
<b>Static Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
B <sub>V(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =-250μA	-20	-	-	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V	--	-	-1	μA
I <sub>GSS</sub>	Gate-Body Leakage Current	V <sub>GS</sub> =±10V, V <sub>DS</sub> =0V	--	-	±100	nA
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =-250μA	-0.4	-0.62	-1.0	V
R <sub>DS(on)</sub>	Drain-Source On-State Resistance	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-2.3A	--	75	100	mΩ
		V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-1.0A	--	105	140	mΩ
		V <sub>GS</sub> =-1.8V, I <sub>D</sub> =-0.5A	--	150	210	mΩ
<b>Dynamic Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
C <sub>ISS</sub>	Input Capacitance	V <sub>DS</sub> =-10V, V <sub>GS</sub> =0V, f=1MHz	-	327	-	pF
C <sub>OSS</sub>	Output Capacitance		-	62	-	pF
C <sub>RSS</sub>	Reverse Transfer Capacitance		-	55	-	pF
<b>Switching Characteristics</b>						
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> =-10V, I <sub>D</sub> =-2A, V <sub>GS</sub> =-4.5V	-	3.9	-	nC
Q <sub>gs</sub>	Gate Source Charge		-	0.7	-	nC
Q <sub>gd</sub>	Gate Drain Charge		-	0.9	-	nC
t <sub>d(on)</sub>	Turn-on Delay Time	V <sub>DD</sub> =-10V, I <sub>D</sub> =-1A, V <sub>GS</sub> =-4.5V, R <sub>G</sub> =2.5Ω	-	6	-	nS
t <sub>r</sub>	Turn-on Rise Time		-	30	-	nS
t <sub>d(off)</sub>	Turn-Off Delay Time		-	45	-	nS
t <sub>f</sub>	Turn-Off Fall Time		-	46	-	nS
<b>Source- Drain Diode Characteristics</b>						
V <sub>SD</sub>	Forward on voltage	T <sub>J</sub> =25°C, I <sub>S</sub> =-2A	-	-	-1.2	V


**Typical Operating Characteristics**

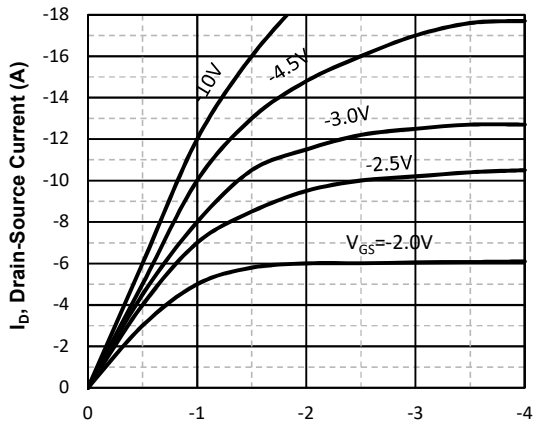


**Fig1. Typical Output Characteristics**

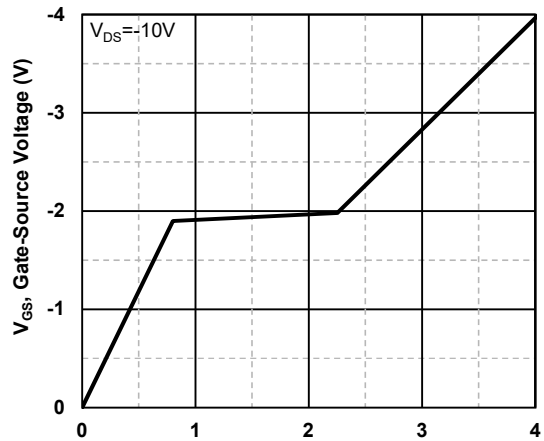


**Fig2. Typical Gate Charge Vs. Gate-Source Voltage**

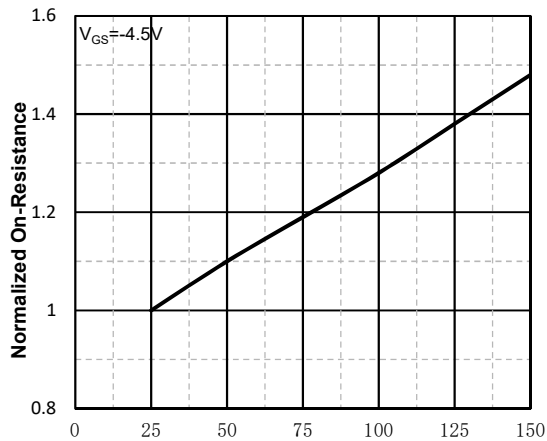


**Fig3. Normalized On-Resistance Vs. Temperature**

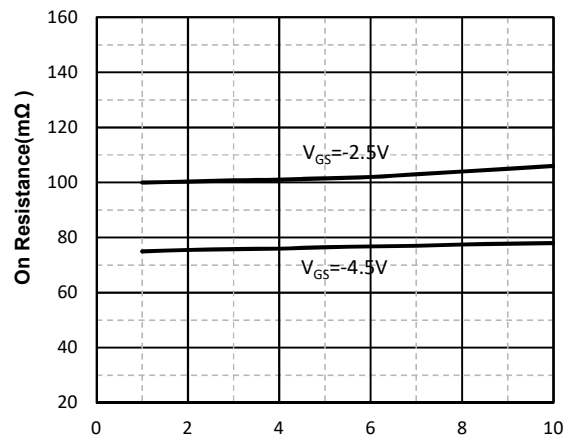


**Fig4. On Resistance Vs. Drain-Source Current**

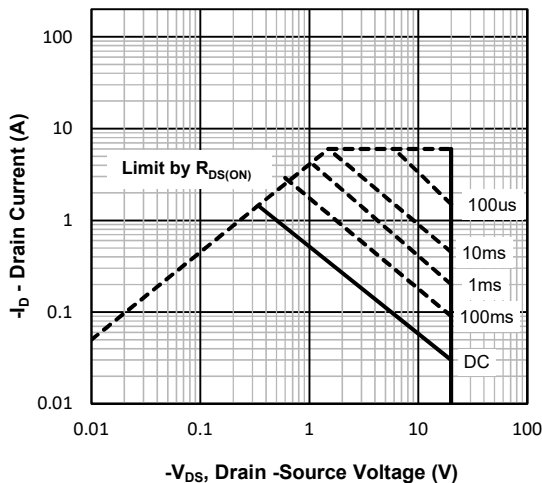

**Fig5. Maximum Safe Operating Area**

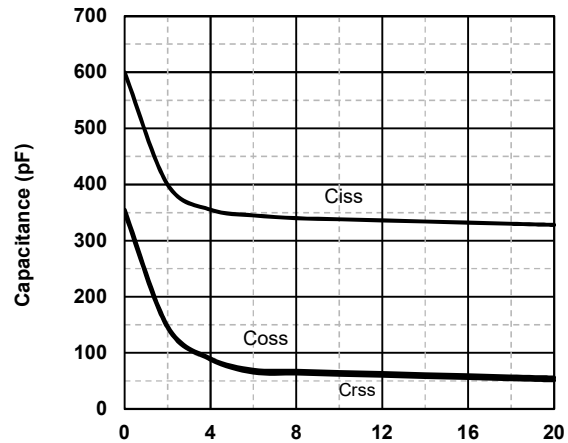

**Fig6 Typical Capacitance Vs. Drain-Source**

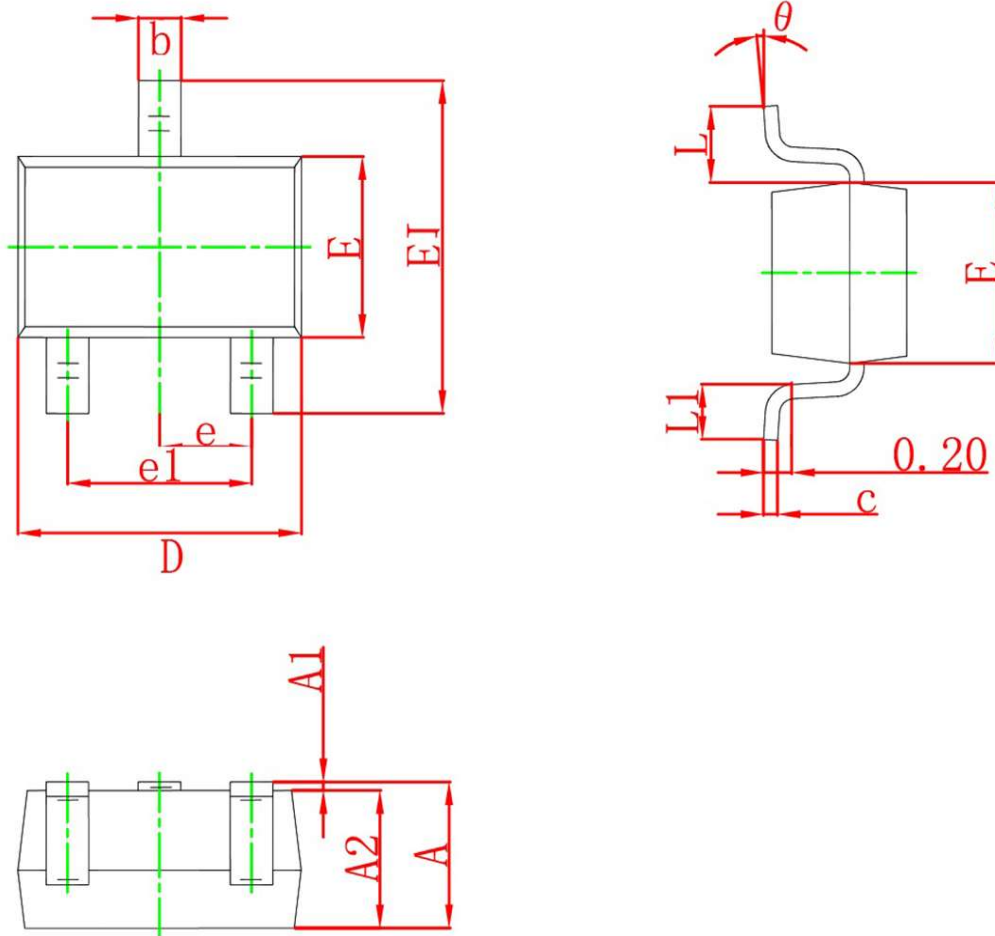**SOT-323 Package information**


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°