

Introduction

The MLS78L series is a three terminal positive voltage linear regulator with fixed voltage output. It has a wide input voltage range. The maximum input voltage can reach 30V (or 35V). At the same time, it can also provide 100mA output current under the condition of good heat dissipation. The MLS78L series adopts fixed voltage output without peripheral resistance, which improves the space utilization efficiency of printed circuit board (PCB). In addition, the MLS78L series also integrates internal current limit, short-circuit protection and thermal shutdown, so that it is basically not affected by overload. Therefore, the MLS78L series is widely used in various scenarios, such as card supervision, to eliminate the noise and distribution problems related to single point supervision. When used as a substitute for Zener-diode resistor combination, it can effectively improve the output impedance and reduce the bias current.

Available Packages

PART NUMBER	PACKAGES
MLS78L Series	SOT-23
	SOT-23-3L
	SOT-323
	SOT-523
	DFN1X1
	SOT-89-3L
	TO-92


Note: For more detailed packaging information, see the part Pin Configuration and Function and the part Mechanical Information.

Features


- Available Output Voltage:
5.0V, 6.0V, 8.0V, 9.0V, 12V and 15V
- Maximum Input Voltage:
30V for $V_{OUT} < 10V$
35V for $V_{OUT} > 10V$
- Maximum Output Current:
Exceed 100mA
- Output Tolerances:
 $\pm 2\%$ at $T_J = 25^\circ C$
 $\pm 5\%$ over the Operating T_J
- Build-in Current Limit
- Thermal Shutdown Protection
- Short Circuit Protection
- No External Components

Applications

- TV Board
- Air Conditioner
- Vehicle Mounted Radar
- Charging Device

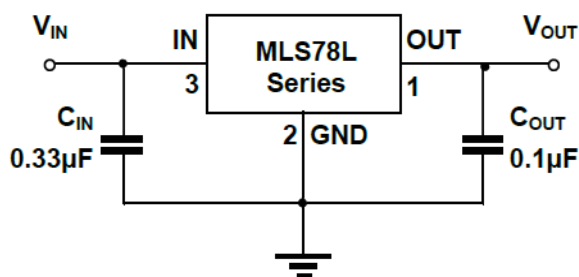

(1) Conventional Circuit

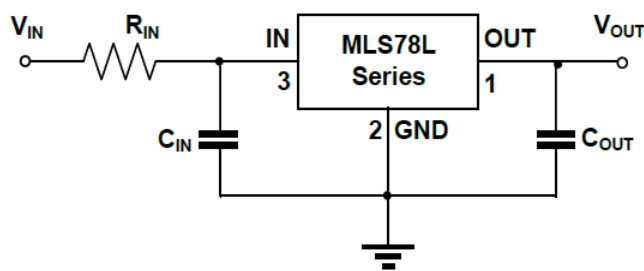

(2) Resistance are used at IN


Typical Application Circuit

Ordering Information

Model	Device	Package	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLS78LXX	MLS78LXX	SOT-23	3,000	45,000	180,000	7"reel
MLS78LXX	MLS78LXX	SOT-23-3L	3,000	45,000	180,000	7"reel
MLS78LXX	MLS78LXX	SOT-89-3L	1,000	10,000	40,000	7"reel
MLS78LXX	MLS78LXX	SOT-323	3,000	45,000	180,000	7"reel
MLS78LXX	MLS78LXX	SOT-523	3,000	45,000	180,000	7"reel
MLS78LXX	MLS78LXX	DFN1X1	12,000	180,000	720,000	7"reel
MLS78LXX	MLS78LXX	TO-92	1,000	10,000	100,000	/

Pin Configuration and Marking Information

Pin Configuration and Function

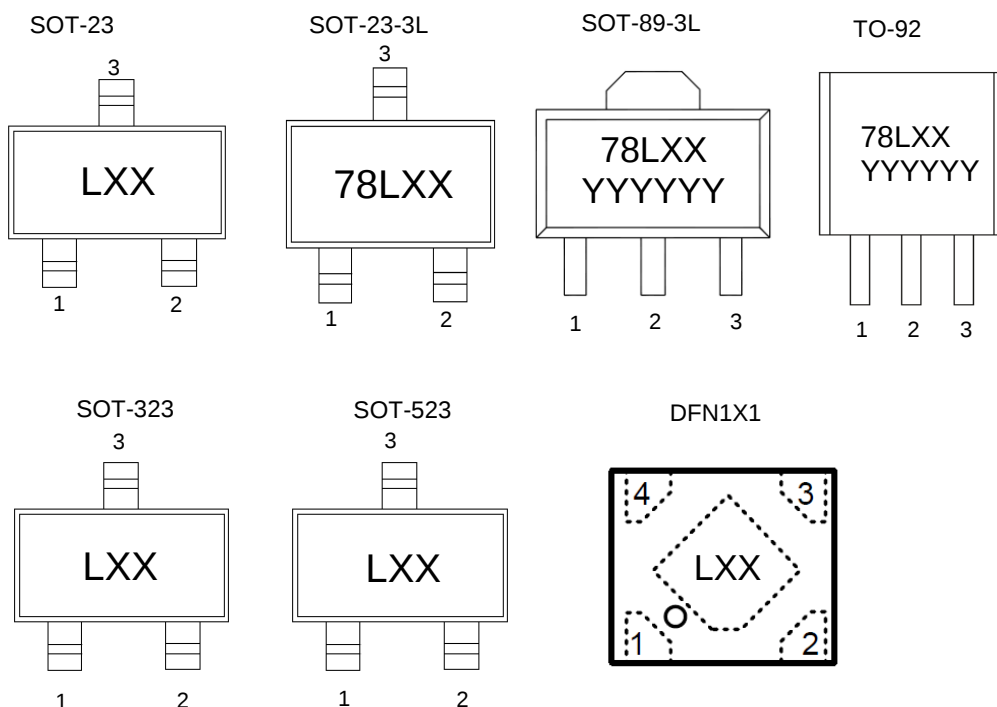


Package Top View

Pin Name	MLS78L Series							I/O	Description
	SOT-23	SOT-23-3L	SOT-323	SOT-523	DFN1X1	SOT-89-3L	TO-92		
IN	2	2	2	2	4	3	3	I	Input to the device.
GND	3	3	3	3	2	2	2	-	Regulator ground.
OUT	1	1	1	1	1	1	1	O	Output of the regulator.
					3				

"78LXX": Product number, the "XX" in the "78LXX" or "LXX" represents the output voltage, for example, if $V_{OUT} = 5.0V$, "XX" is "05".

"YYY": Code.

Representative Schematic Diagram

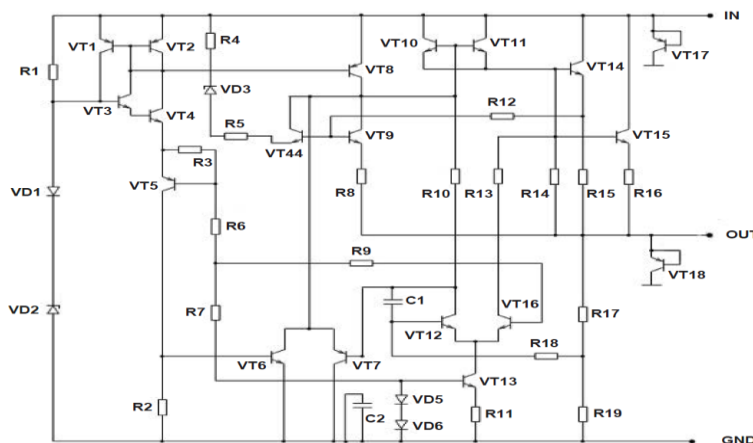

Specifications

 Absolute Maximum Ratings⁽¹⁾

Characteristic		Symbol	Value	Unit
Maximum input voltage ⁽²⁾	MLS78L05	V _{IN}	30	V
	MLS78L06			
	MLS78L08			
	MLS78L09		35	
	MLS78L12			
	MLS78L15			
Maximum power dissipation	SOT-23	P _{D Max}	Internally Limited ⁽³⁾	W
	SOT-23-3L			
	SOT-89-3L			
	SOT-323			
	SOT-523			
	DFN1X1			
	TO-92			
Maximum junction temperature		T _{J Max}	150	°C
Storage temperature		T _{stg}	- 65 ~ 150	°C
Soldering temperature & time		T _{solder}	260°C, 10s	-

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network ground terminal.

(3) Refer to Thermal Information for details.

Electrical Characteristics

 MLS78L05 ($V_{OUT} = 5.0V$, $V_{IN} = 10V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	30	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	4.90	5.00	5.10	V
		$V_{IN} = 7 \text{ to } 20V$, $I_{OUT} = 1 \text{ to } 40mA$	4.75	5.00	5.25	V
		$I_{OUT} = 1 \text{ to } 70mA$	4.75	5.00	5.25	V
Output current	I_{OUT}	$T_J = 25^\circ C$	-	100	-	mA
Quiescent current	I_Q	$T_J = 25^\circ C$	-	0.3	-	mA
		$T_J = 125^\circ C$	-	-	1.0	mA
Quiescent current change	ΔI_Q	$V_{IN} = 8 \text{ to } 20V$	-	-	0.2	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	0.8	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 7 \text{ to } 20V$, $T_J = 25^\circ C$	-	12.0	30	mV
		$V_{IN} = 8 \text{ to } 20V$, $T_J = 25^\circ C$	-	10.0	25	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	20.0	50	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	10.0	25	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	32	-	μV
Ripple rejection	RR	$V_{IN} = 8 \text{ to } 20V$, $f = 120Hz$	75	84	-	dB

MLS78L06 ($V_{OUT} = 6.0V$, $V_{IN} = 11V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	30	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	5.88	6.00	6.12	V
		$V_{IN} = 8 \text{ to } 20V$, $I_{OUT} = 1 \text{ to } 40mA$	5.70	6.00	6.30	V
		$I_{OUT} = 1 \text{ to } 70mA$	5.70	6.00	6.30	V
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	3.9	6.0	mA
Quiescent current change	ΔI_Q	$V_{IN} = 9 \text{ to } 20V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 8 \text{ to } 20V$, $T_J = 25^\circ C$	-	35	175	mV
		$V_{IN} = 9 \text{ to } 20V$, $T_J = 25^\circ C$	-	29	125	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	16	80	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	9	40	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	46	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 8 \text{ to } 20V$, $f = 120Hz$	40	48	-	dB

MLS78L08 ($V_{OUT} = 8.0V$, $V_{IN} = 14V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	30	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	7.84	8.00	8.16	V
		$V_{IN} = 8 \text{ to } 20V$, $I_{OUT} = 1 \text{ to } 40mA$	7.60	8.00	8.40	V
		$I_{OUT} = 1 \text{ to } 70mA$	7.76	8.00	8.40	V
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	4	6.0	mA
Quiescent current change	ΔI_Q	$V_{IN} = 11 \text{ to } 23V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 10.5 \text{ to } 23V$, $T_J = 25^\circ C$	-	42	175	mV
		$V_{IN} = 11 \text{ to } 23V$, $T_J = 25^\circ C$	-	36	125	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	18	80	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	10	40	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	54	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 13 \text{ to } 23V$, $f = 120Hz$	37	46	-	dB

MLS78L09 ($V_{OUT} = 9.0V$, $V_{IN} = 16V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	30	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	8.82	9.00	9.18	V
		$V_{IN} = 12 \text{ to } 24V$, $I_{OUT} = 1 \text{ to } 40mA$	8.55	9.00	9.45	V
		$I_{OUT} = 1 \text{ to } 70mA$	8.55	9.00	9.45	V
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	4.1	6.0	mA
Quiescent current change	ΔI_Q	$V_{IN} = 13 \text{ to } 24V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 12 \text{ to } 24V$, $T_J = 25^\circ C$	-	45	175	mV
		$V_{IN} = 13 \text{ to } 24V$, $T_J = 25^\circ C$	-	40	125	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	19	90	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	11	40	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	58	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 15 \text{ to } 25V$, $f = 120Hz$	37	45	-	dB

MLS78L12 ($V_{OUT} = 12.0V$, $V_{IN} = 19V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	35	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	11.76	12.00	12.24	V
		$V_{IN} = 14 \text{ to } 27V$, $I_{OUT} = 1 \text{ to } 40mA$	11.40	12.00	12.60	V
		$I_{OUT} = 1 \text{ to } 70mA$	11.40	12.00	12.60	V
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	4.3	6.0	mA
Quiescent current change	ΔI_Q	$V_{IN} = 14.5 \text{ to } 27V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 14.5 \text{ to } 27V$, $T_J = 25^\circ C$	-	55	250	mV
		$V_{IN} = 16 \text{ to } 27V$, $T_J = 25^\circ C$	-	49	200	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	22	100	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	13	50	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	70	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 15 \text{ to } 25V$, $f = 120Hz$	37	42	-	dB


MLS78L15 ($V_{OUT} = 15.0V$, $V_{IN} = 23V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Ccnditions	Min	Typ	Max	Uuit
Input voltage	V_{IN}	-	-	-	35	V
Output voltage	V_{OUT}	$T_J = 25^\circ C$	14.70	15.00	15.30	V
		$V_{IN} = 17.5 \text{ to } 30V$, $I_{OUT} = 1 \text{ to } 40mA$	14.25	15.00	15.75	V
		$I_{OUT} = 1 \text{ to } 70mA$	14.25	15.00	15.75	V
Output current	I_{OUT}	$T_J = 25^\circ C$	100	-	-	mA
Quiescent current	I_Q	$I_{OUT} = 0mA$	-	4.6	6.5	mA
Quiescent current change	ΔI_Q	$V_{IN} = 19 \text{ to } 30V$	-	-	1.5	mA
		$I_{OUT} = 1 \text{ to } 40mA$	-	-	0.1	mA
Dropout voltage	V_{DO}	$T_J = 25^\circ C$	-	1.7	-	V
Line regulation	ΔV_{LINE}	$V_{IN} = 17.5 \text{ to } 30V$, $T_J = 25^\circ C$	-	65	300	mV
		$V_{IN} = 19 \text{ to } 30V$, $T_J = 25^\circ C$	-	58	250	mV
Load regulation	ΔV_{LOAD}	$I_{OUT} = 1 \text{ to } 100mA$, $T_J = 25^\circ C$	-	25	150	mV
		$I_{OUT} = 1 \text{ to } 40mA$, $T_J = 25^\circ C$	-	15	75	mV
Output noise voltage	V_N	$f = 10 \text{ to } 100kHz$, $T_J = 25^\circ C$	-	82	-	$\mu V/V_{OUT}$
Ripple rejection	RR	$V_{IN} = 18.5 \text{ to } 28.5V$, $f = 120Hz$	34	39	-	dB


Typical Characteristics

MLS78L05 ($V_{OUT} = 5.0V$, $T_J = 25^\circ C$, unless otherwise specified)


Output Characteristics

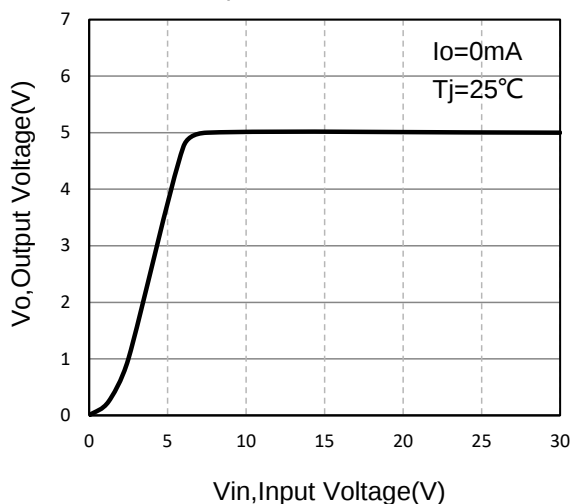


Dropout Characteristics

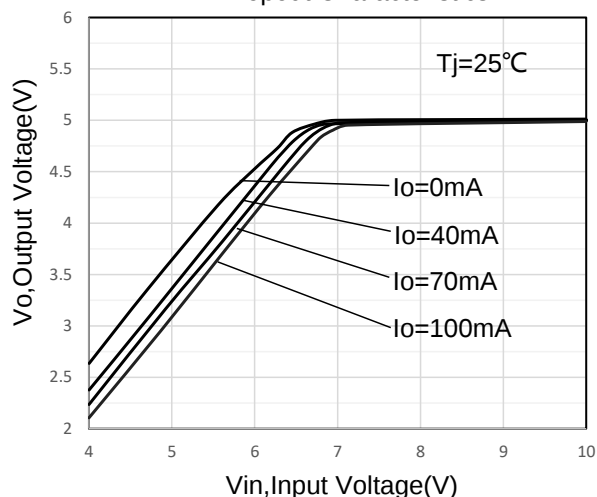


Quiescent Current vs Input Voltage

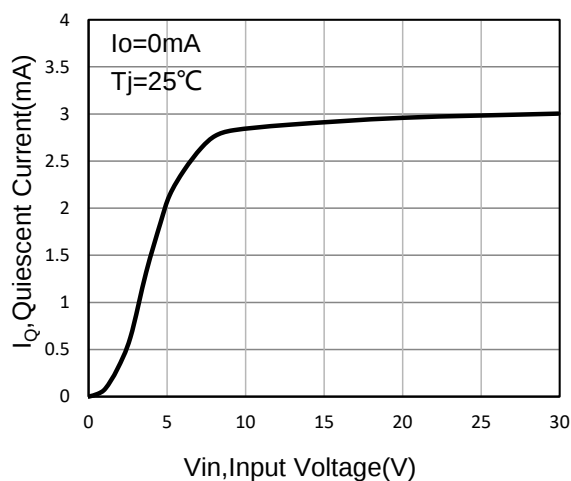


Current Cut-off Grid Voltage

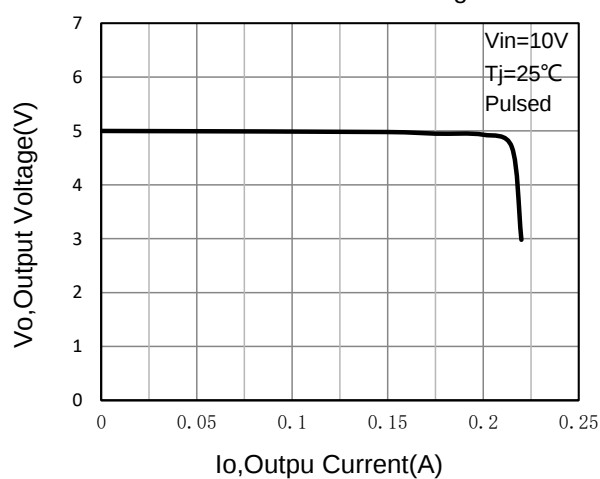







Output Voltage vs Junction Temperature

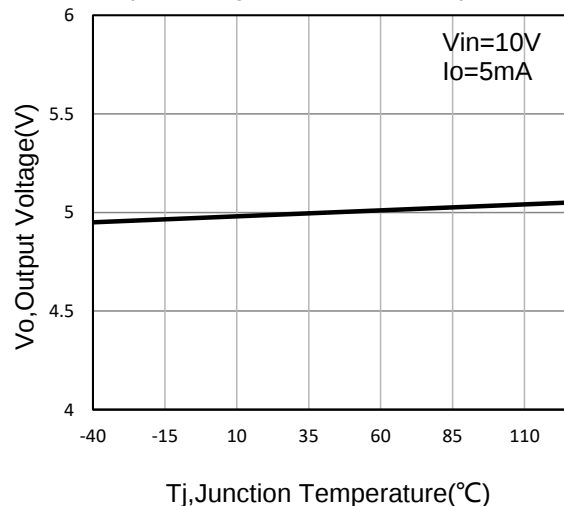







Power Derating Curve

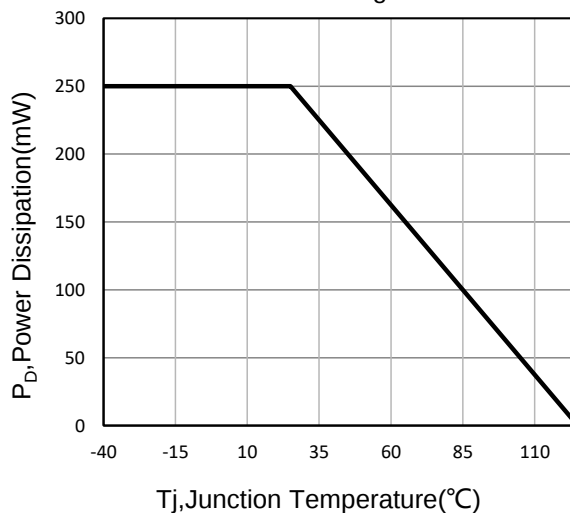

MLS78L06 ($V_{OUT} = 6.0V$, $T_J = 25^\circ C$, unless otherwise specified)

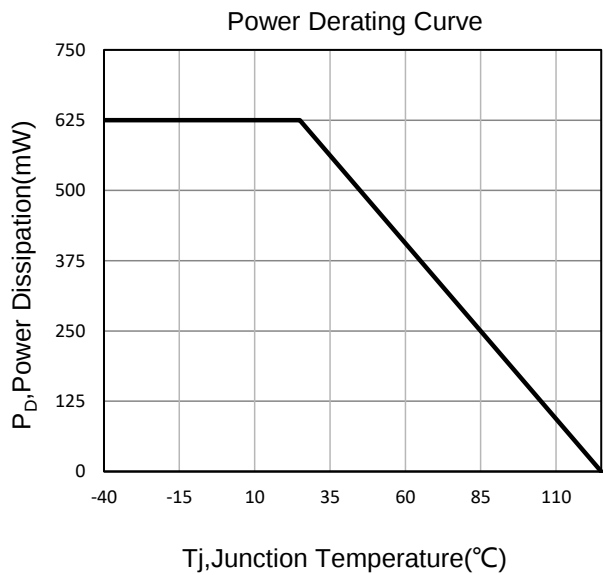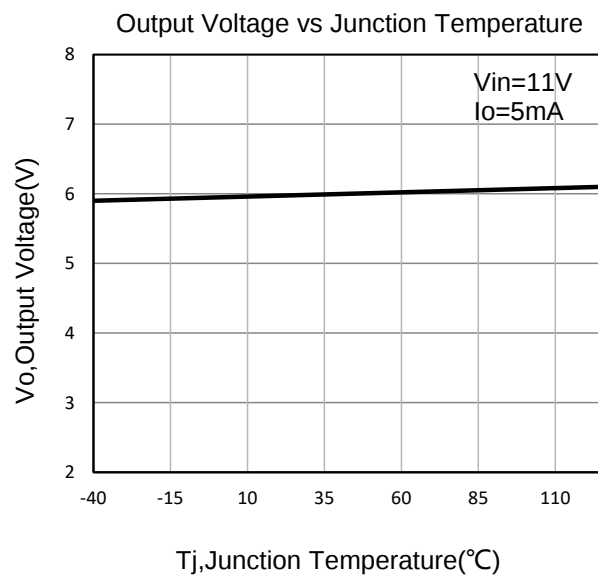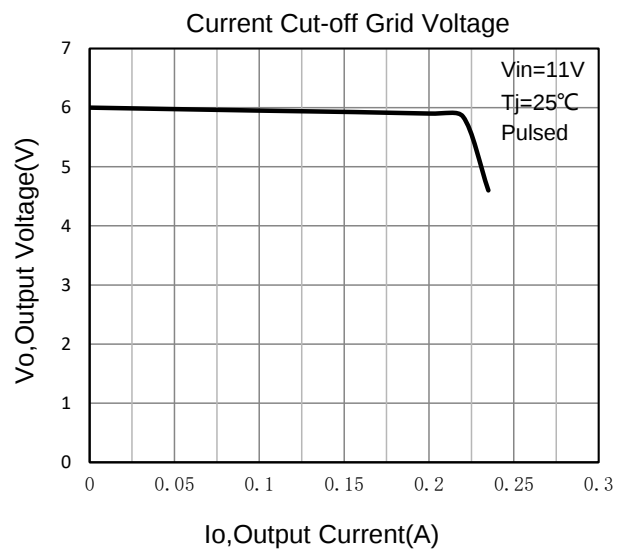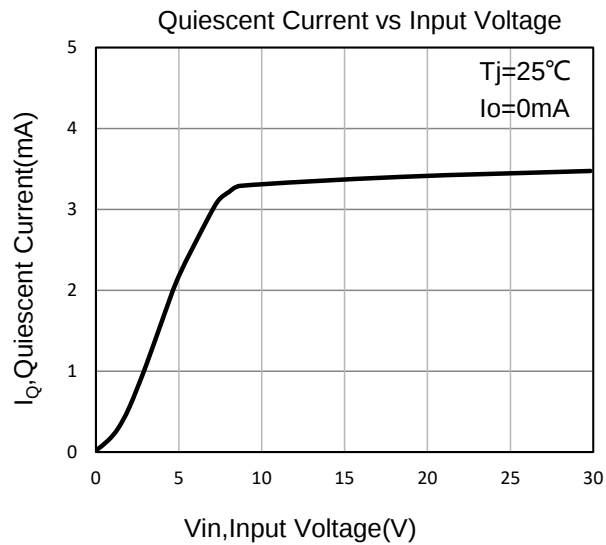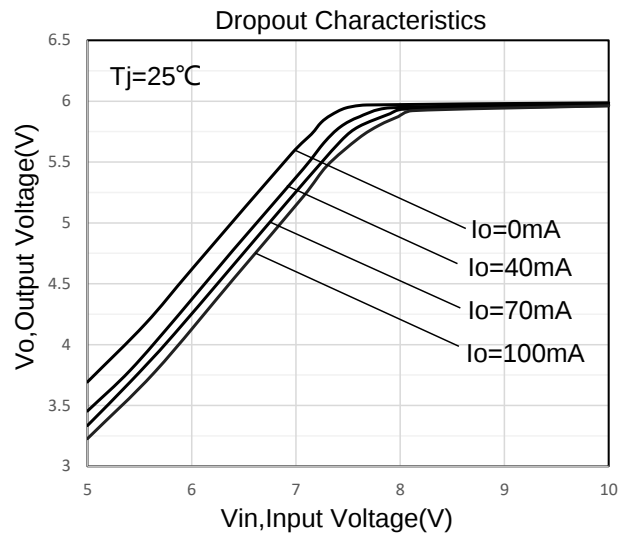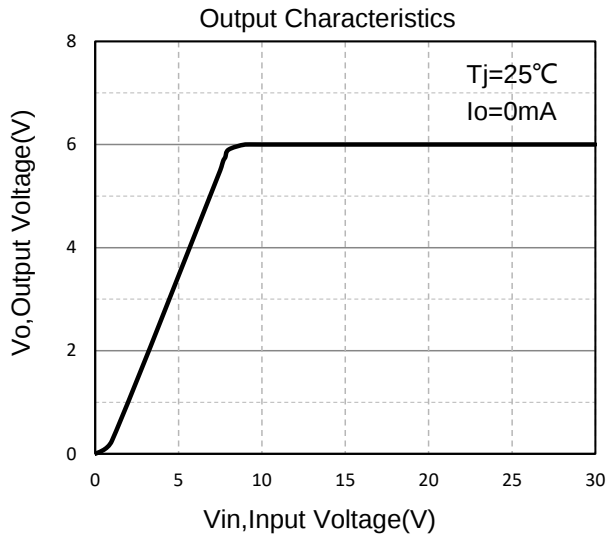


MLS78L08 ($V_{OUT} = 8.0V$, $T_J = 25^{\circ}C$, unless otherwise specified)

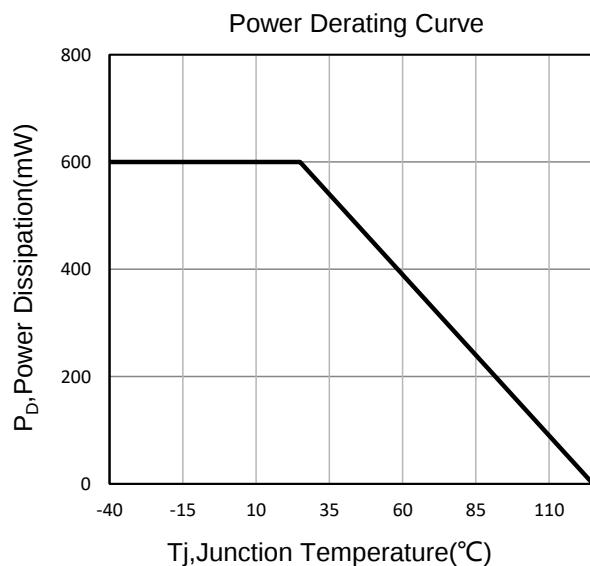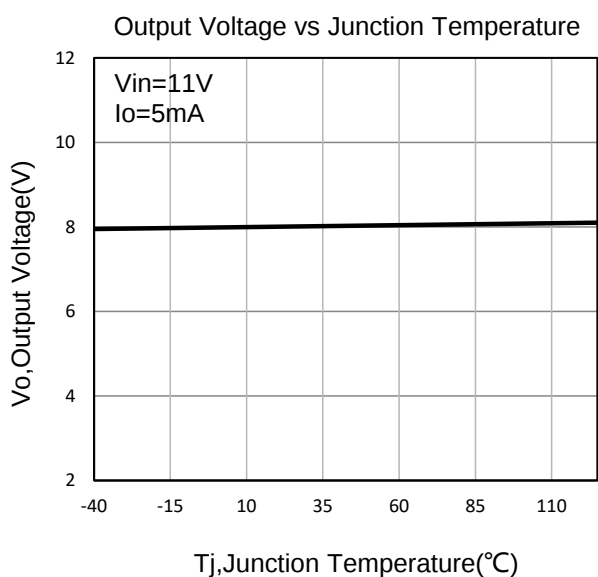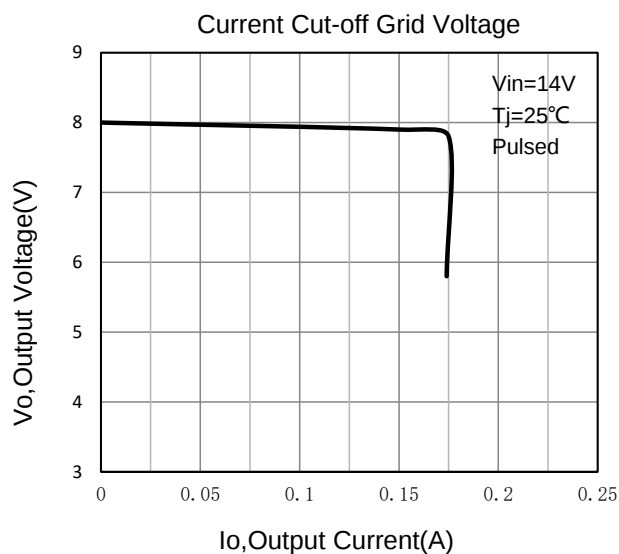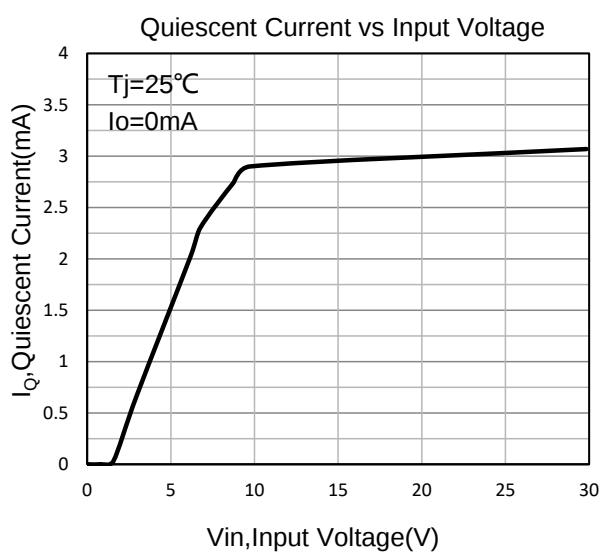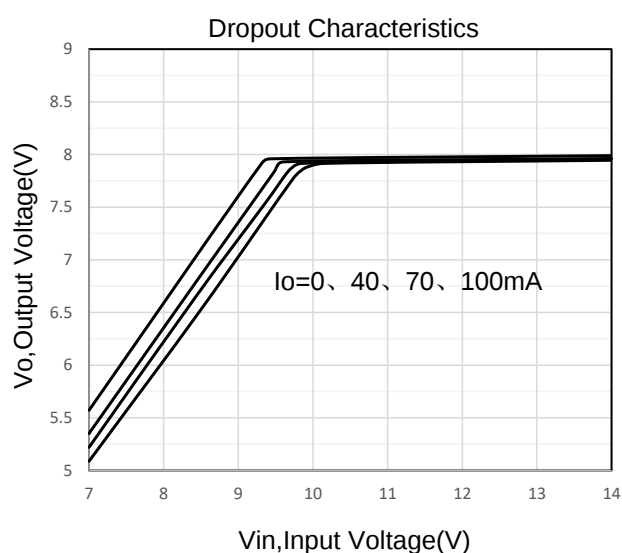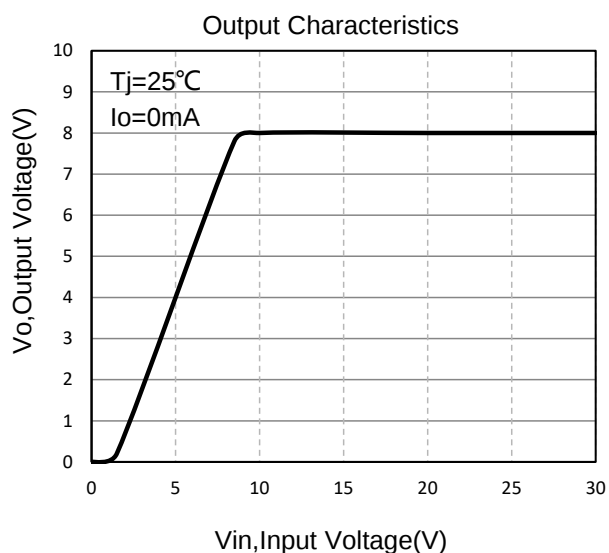


MLS78L09 ($V_{OUT} = 9.0V$, $T_J = 25^\circ C$, unless otherwise specified)


Output Characteristics

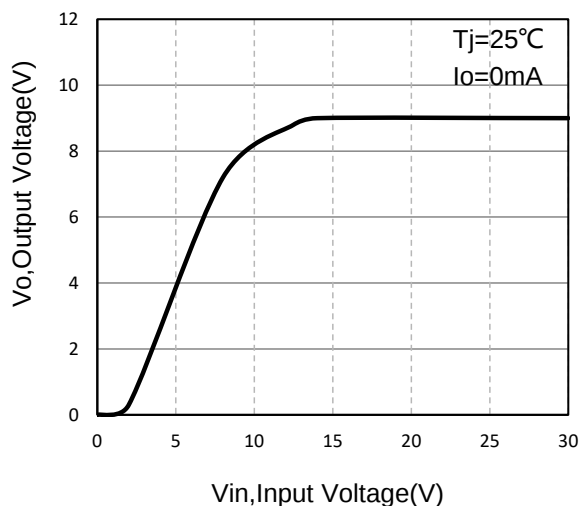


Dropout Characteristics

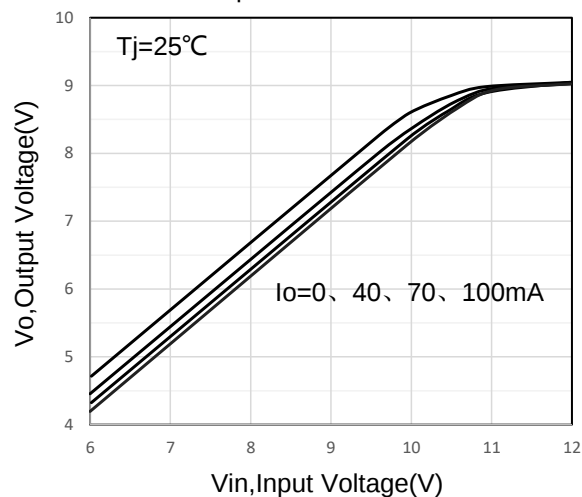


Quiescent Current vs Input Voltage

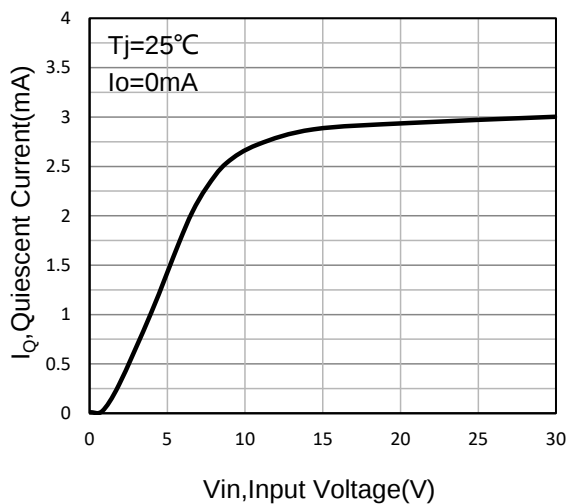


Current Cut-off Grid Voltage

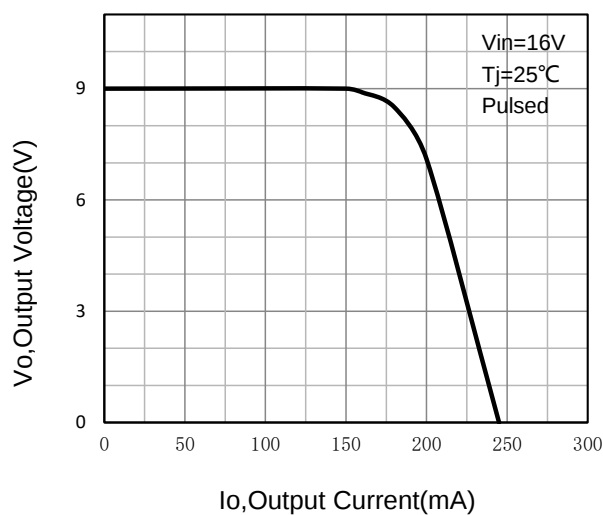

Output Voltage vs Junction Temperature

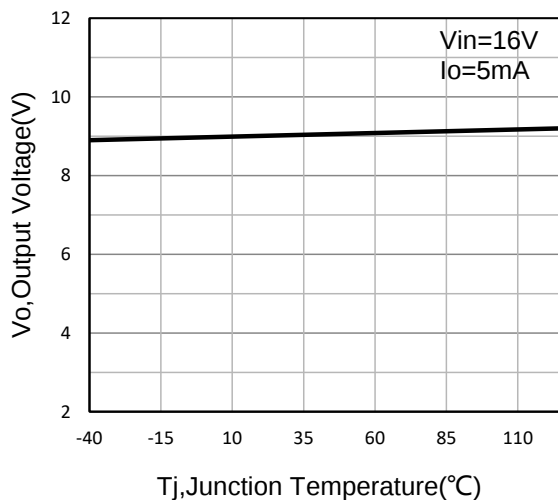


Power Derating Curve

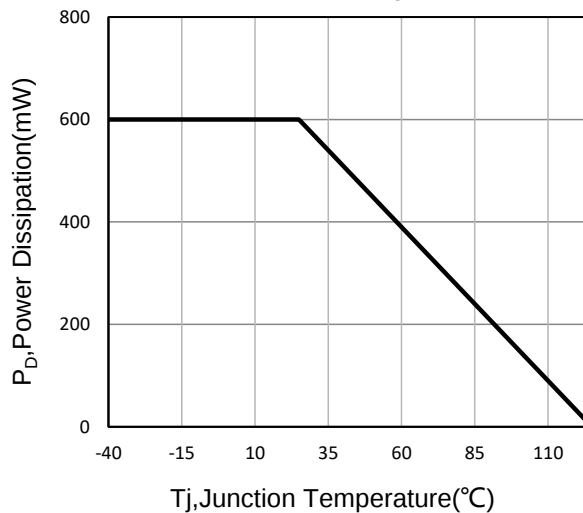


MLS78L12 ($V_{OUT} = 12V$, $T_J = 25^\circ C$, unless otherwise specified)


Output Characteristics

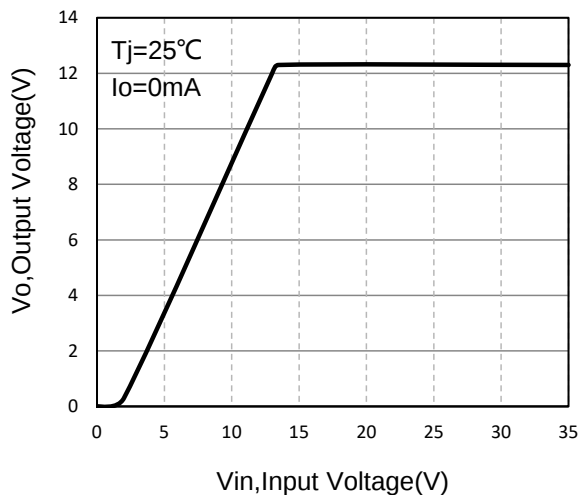


Dropout Characteristics

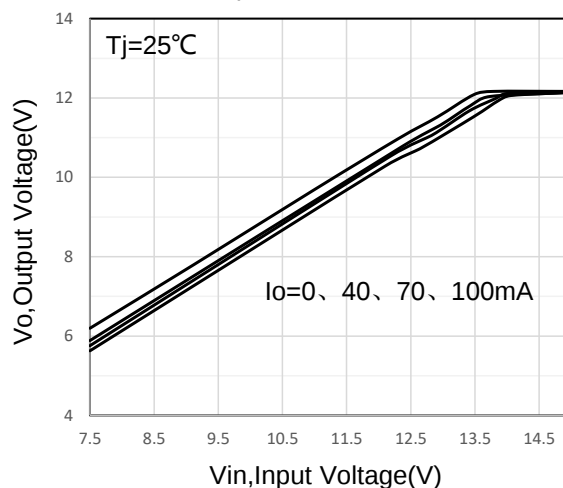


Quiescent Current vs Input Voltage

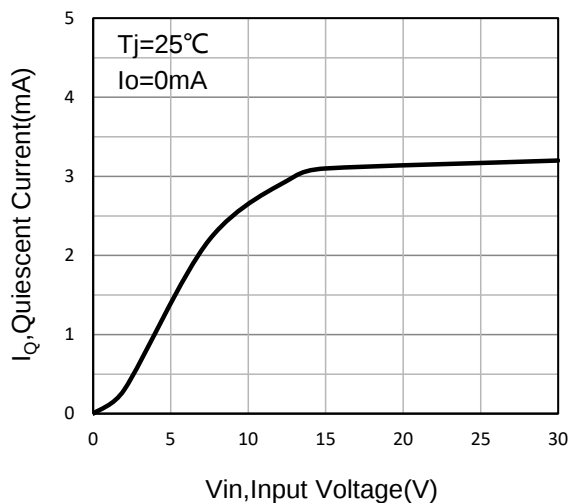


Current Cut-off Grid Voltage

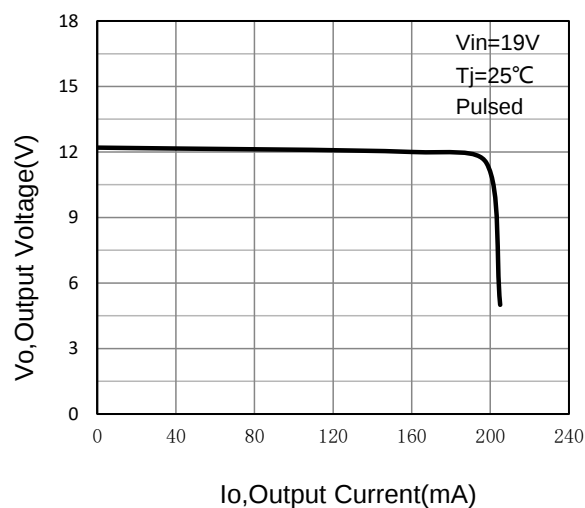

Output Voltage vs Junction Temperature

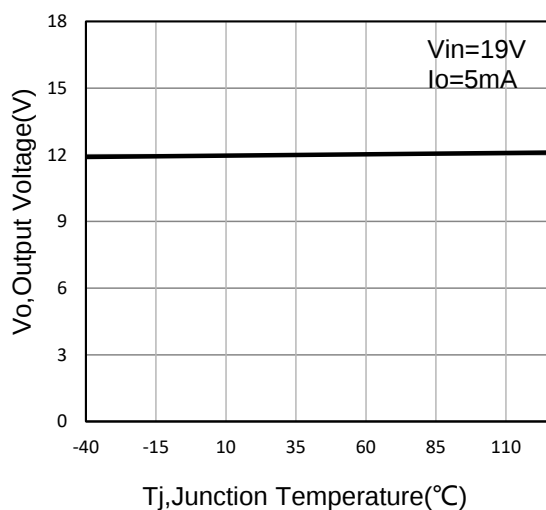


Power Derating Curve

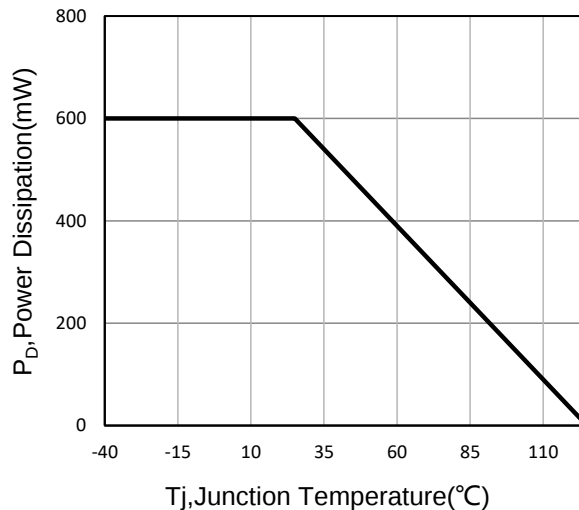


MLS78L15 ($V_{OUT} = 15V$, $T_J = 25^\circ C$, unless otherwise specified)


Output Characteristics

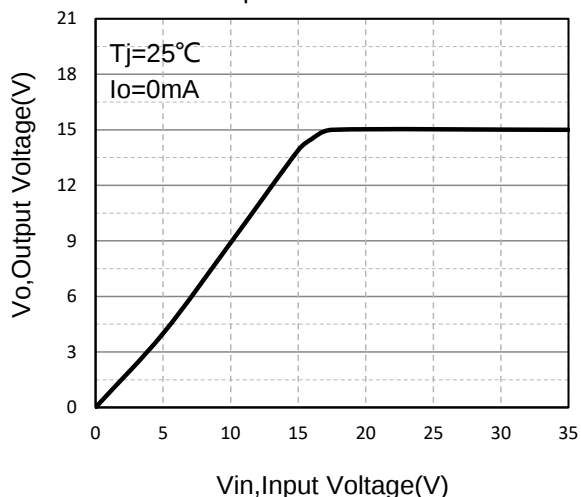


Dropout Characteristics

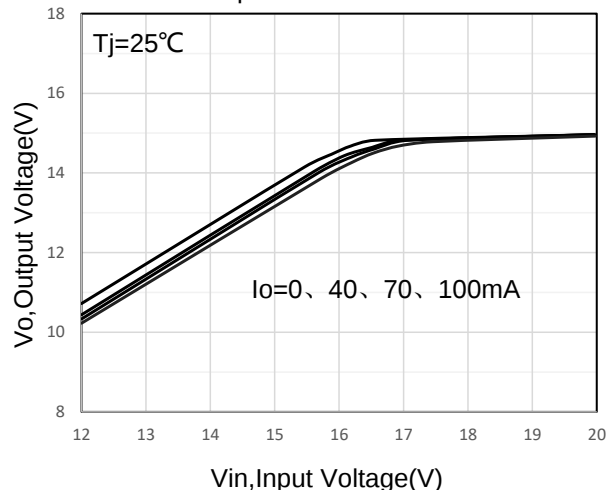


Quiescent Current vs Input Voltage

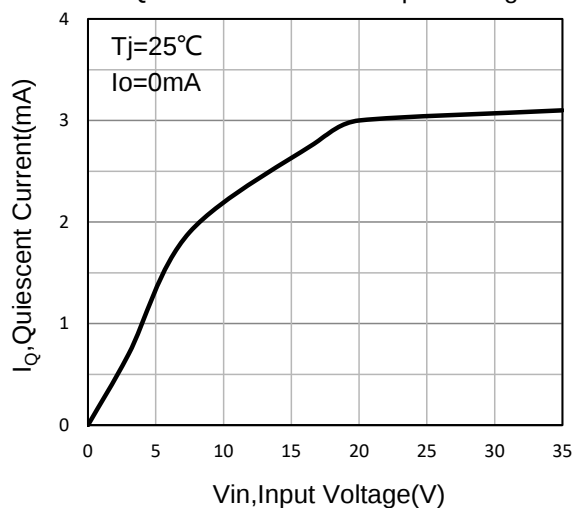


Current Cut-off Grid Voltage

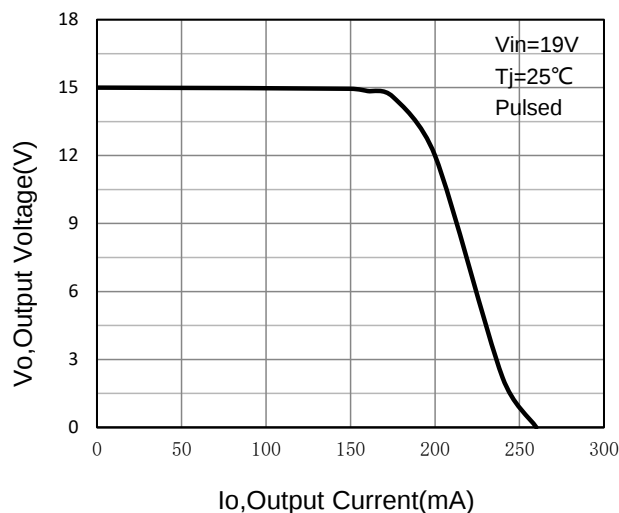

Output Voltage vs Junction Temperature

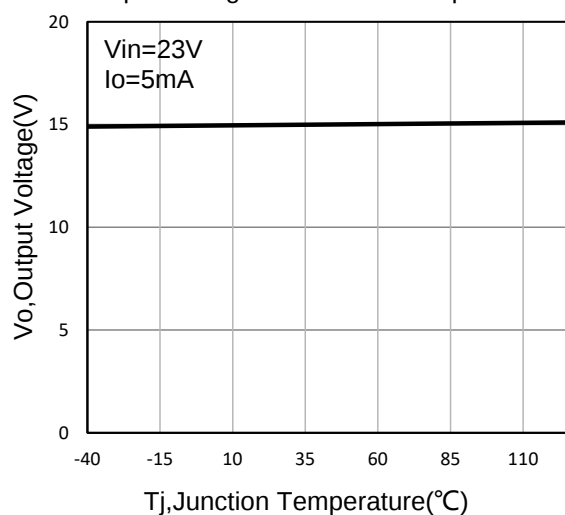


Power Derating Curve

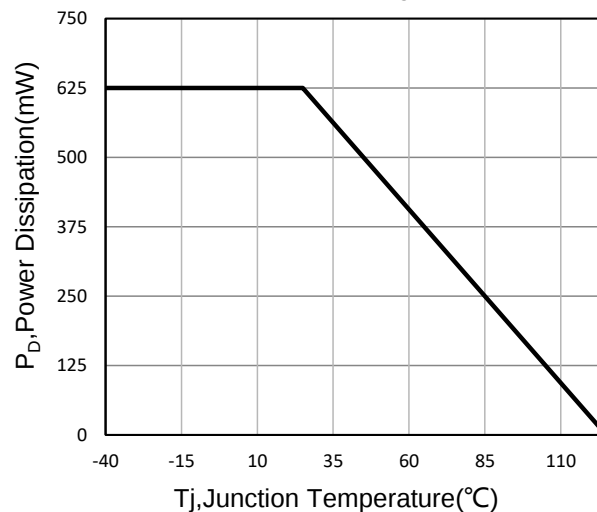




Mechanical Information

SOT-89 Package information

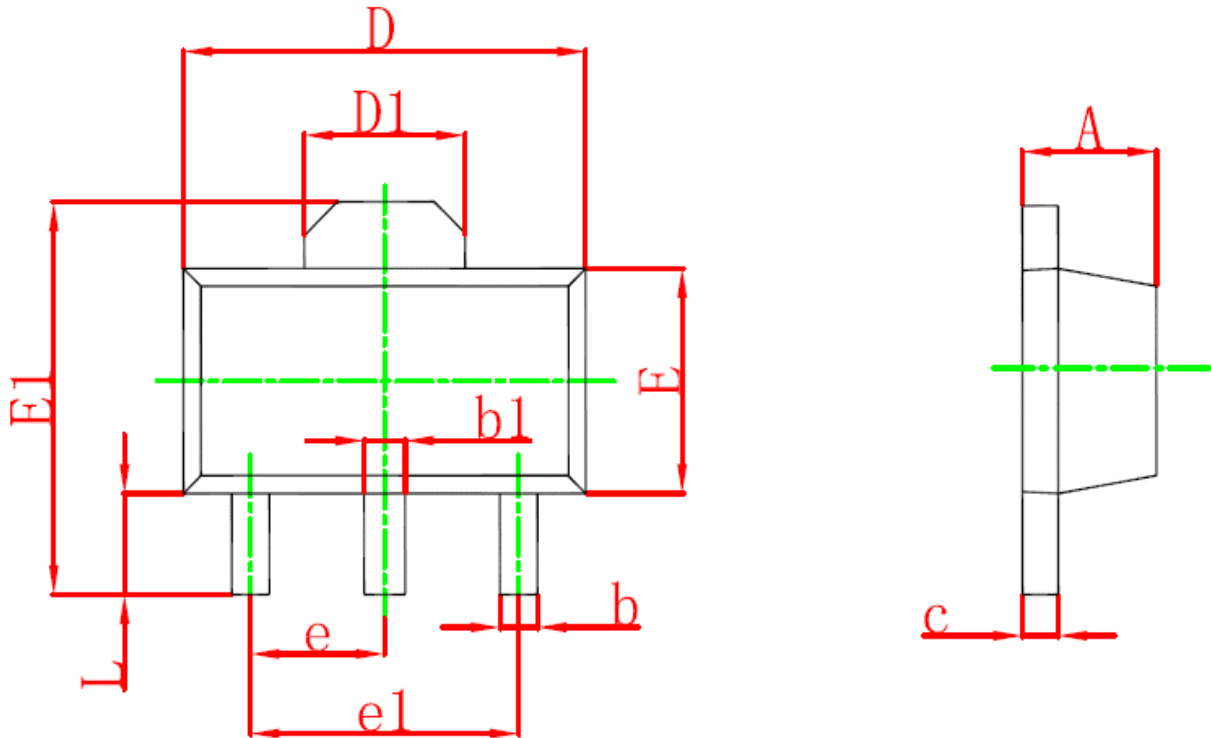




Symbol	Dimensions in Millimeters(mm)		Dimensions in Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

SOT-23-3L Package information

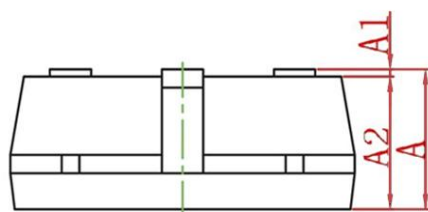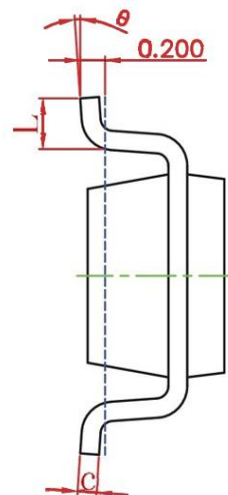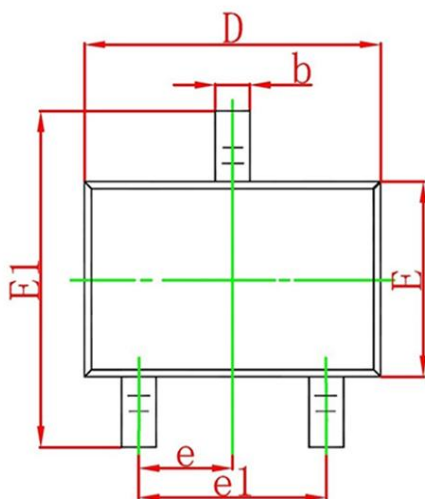


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.042	0.050
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.042	0.046
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.112	0.120
E	1.500	1.700	0.060	0.068
E1	2.650	2.950	0.106	0.118
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT-323 Package information

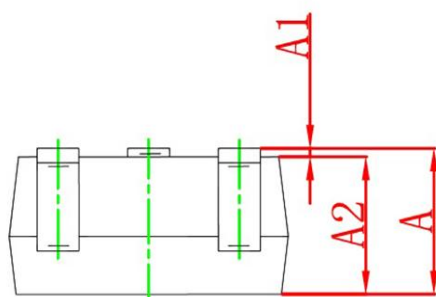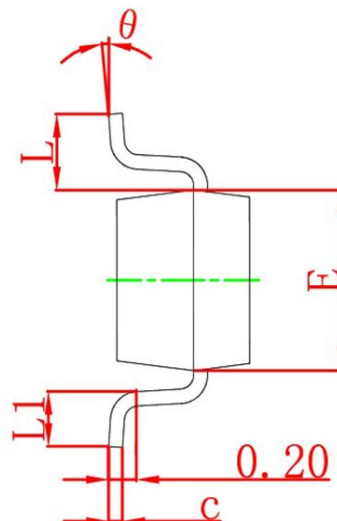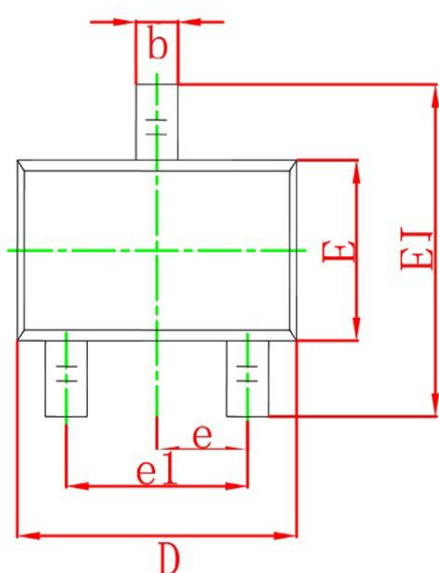


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT-523 Package information

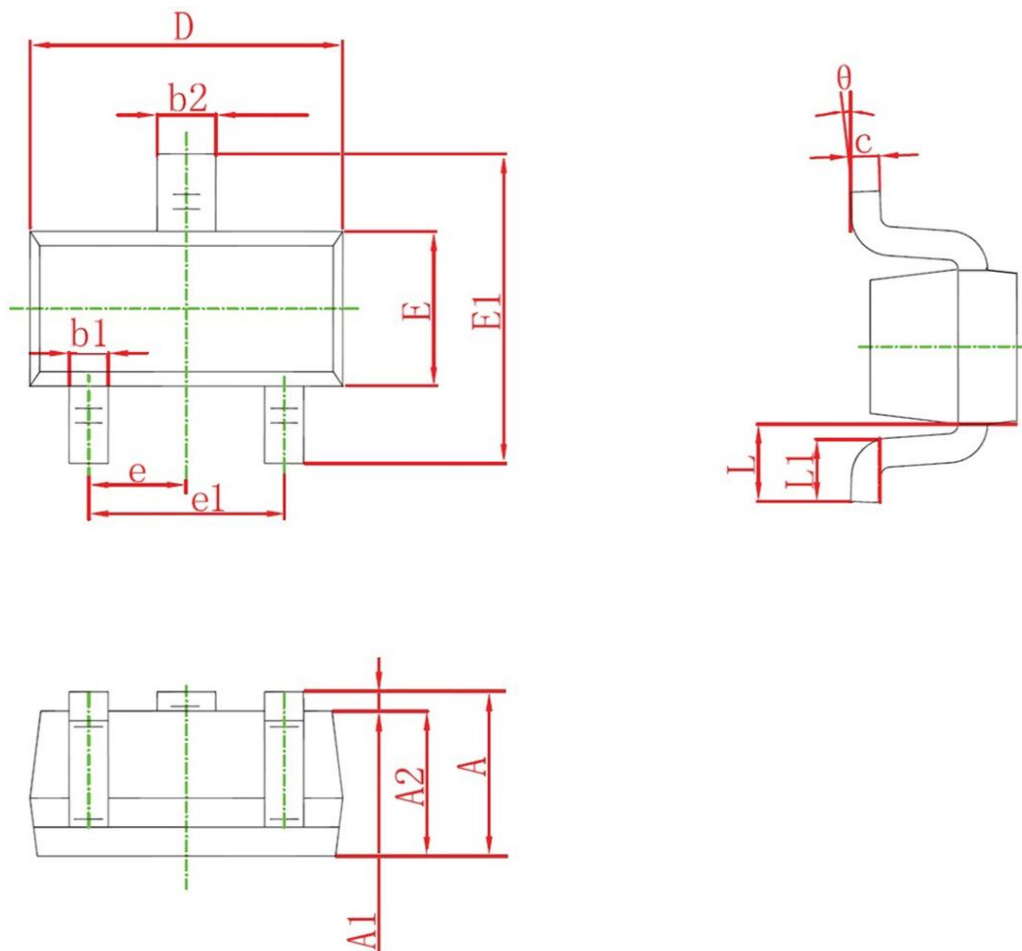


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°


DFN1X1 Package information

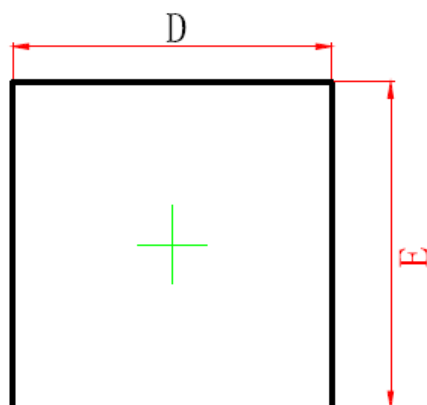

TOP VIEW

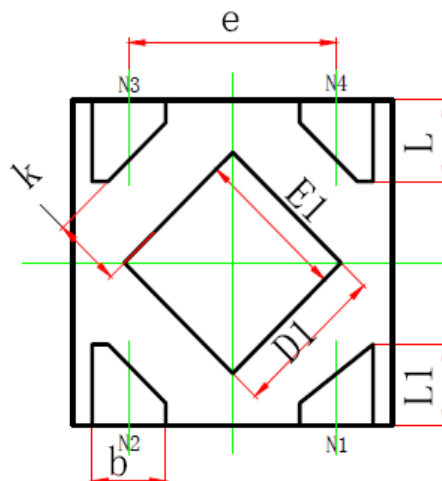


BOTTOM VIEW

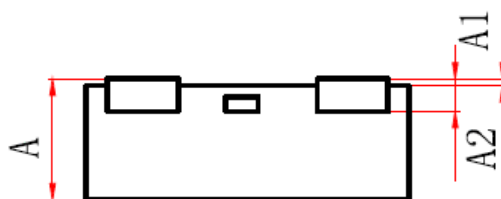

SIDE VIEW


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.320	0.400	0.013	0.016
A1	0.000	0.050	0.000	0.002
A2	0.100REF		0.004REF	
D	0.950	1.050	0.037	0.041
E	0.950	1.050	0.037	0.041
D1	0.430	0.530	0.017	0.021
E1	0.430	0.530	0.017	0.021
k	0.150MIN		0.006MIN	
b	0.180	0.280	0.007	0.011
e	0.650TYP		0.026TYP	
L	0.200	0.300	0.008	0.012
L1	0.200	0.300	0.008	0.012

SOT-23 Package information

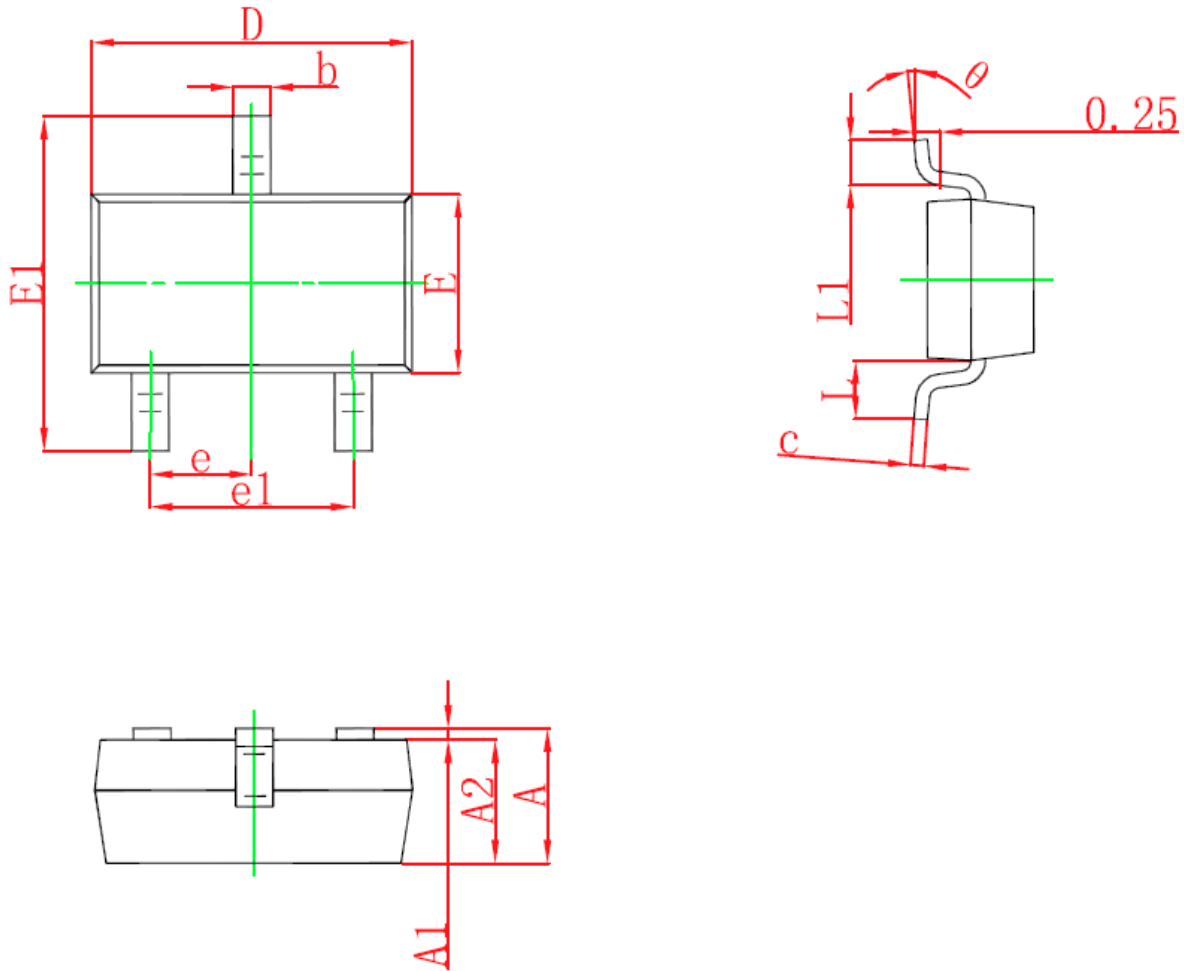

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

TO-92 Package information

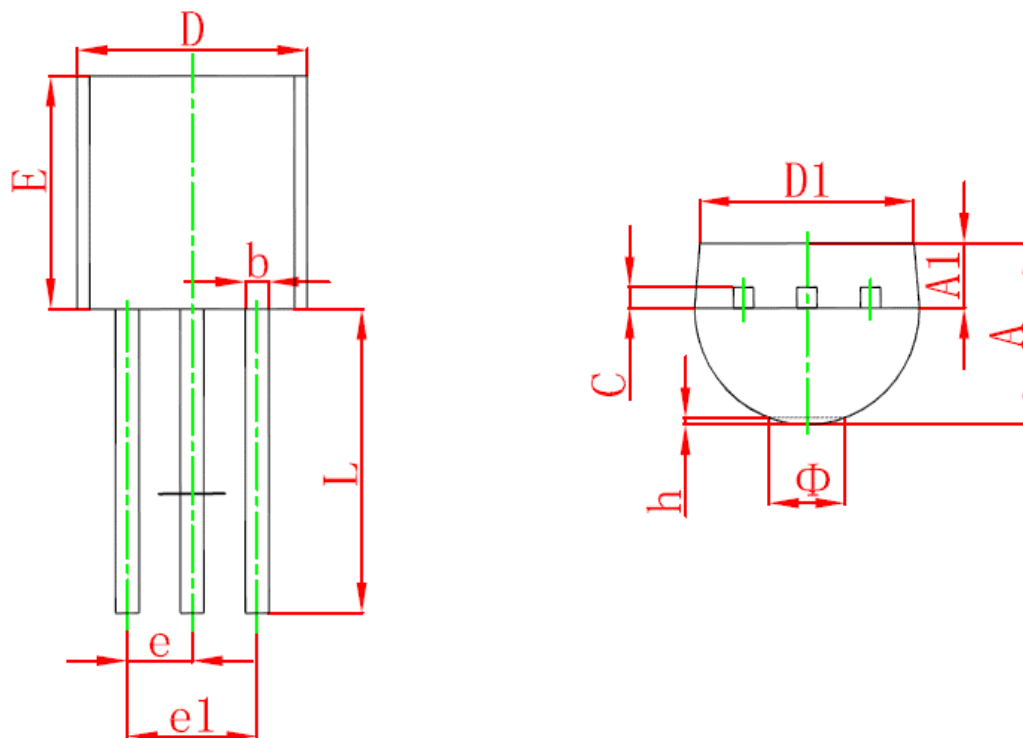

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	13.000	15.000	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015