

## Features


- Split gate trench MOSFET technology
- Low  $R_{DS(on)}$  & FOM
- Excellent stability and uniformity
- Fast switching and soft recovery

## Application

- Consumer electronic power supply
- Motor control
- Synchronous-rectification
- Isolated DC/DC convertor


## Product Summary

| $V_{DS}$ | $R_{DS(on)}$ TYP | $I_D$ |
|----------|------------------|-------|
| 100V     | 50mΩ@10V         | 8A    |
|          | 65mΩ@4.5V        |       |




1008A: Device code

Marking and pin assignment



SOT-23-3L top view



Schematic diagram



Pb-Free



Halogen-Free

## Absolute Maximum Ratings (TA=25°C unless otherwise noted)

| Symbol | Parameter | Rating | Unit |
|--------|-----------|--------|------|
|--------|-----------|--------|------|

### Common Ratings (TC=25°C Unless Otherwise Noted)

|           |                                  |                             |    |
|-----------|----------------------------------|-----------------------------|----|
| $V_{DS}$  | Drain-Source Breakdown Voltage   | 100                         | V  |
| $V_{GS}$  | Gate-Source Voltage              | ±20                         | V  |
| $T_J$     | Maximum Junction Temperature     | 150                         | °C |
| $T_{STG}$ | Storage Temperature Range        | -50 to 155                  | °C |
| $I_S$     | Diode Continuous Forward Current | $T_C=25^\circ\text{C}$<br>8 | A  |

### Mounted on Large Heat Sink







|                 |                                     |                               |      |
|-----------------|-------------------------------------|-------------------------------|------|
| $I_{DM}$        | Pulse Drain Current Tested          | $T_C=25^\circ\text{C}$<br>25  | A    |
| $I_D$           | Continuous Drain Current            | $T_C=25^\circ\text{C}$<br>8   | A    |
| $P_D$           | Maximum Power Dissipation           | $T_C=25^\circ\text{C}$<br>1.4 | W    |
| $R_{\theta JA}$ | Thermal Resistance Junction-Ambient | 100                           | °C/W |

## Ordering Information (Example)




| Type      | Package   | Marking | Minimum Package(pcs) | Inner Box Quantity(pcs) | Outer Carton Quantity(pcs) | Delivery Mode |
|-----------|-----------|---------|----------------------|-------------------------|----------------------------|---------------|
| MLSK1008A | SOT-23-3L | 1008A   | 3,000                | 45,000                  | 180,000                    | 7"reel        |

| Electrical Characteristics (T <sub>J</sub> =25℃ unless otherwise noted)             |                                  |                                                                                    |     |     |      |      |
|-------------------------------------------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------|-----|-----|------|------|
| Symbol                                                                              | Parameter                        | Condition                                                                          | Min | Typ | Max  | Unit |
| Static Electrical Characteristics @ T <sub>J</sub> = 25℃ (unless otherwise stated)  |                                  |                                                                                    |     |     |      |      |
| B <sub>V(BR)DSS</sub>                                                               | Drain-Source Breakdown Voltage   | V <sub>GS</sub> =0V, I <sub>D</sub> =250μA                                         | 100 | --  | --   | V    |
| I <sub>DSS</sub>                                                                    | Zero Gate Voltage Drain Current  | V <sub>DS</sub> =100V, V <sub>GS</sub> =0V                                         | --  | --  | 1    | μA   |
| I <sub>GSS</sub>                                                                    | Gate-Body Leakage Current        | V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V                                         | --  | --  | ±100 | nA   |
| V <sub>GS(th)</sub>                                                                 | Gate Threshold Voltage           | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA                           | 1.0 | 1.8 | 2.5  | V    |
| R <sub>DS(on)</sub>                                                                 | Drain-Source On-State Resistance | V <sub>GS</sub> =10V, I <sub>D</sub> =8A                                           | --  | 50  | 65   | mΩ   |
|                                                                                     |                                  | V <sub>GS</sub> =4.5V, I <sub>D</sub> =5A                                          | --  | 65  | 90   | mΩ   |
| Dynamic Electrical Characteristics @ T <sub>J</sub> = 25℃ (unless otherwise stated) |                                  |                                                                                    |     |     |      |      |
| C <sub>ISS</sub>                                                                    | Input Capacitance                | V <sub>DS</sub> =50V, V <sub>GS</sub> =0V, f=1MHz                                  | --  | 171 | --   | pF   |
| C <sub>OSS</sub>                                                                    | Output Capacitance               |                                                                                    | --  | 58  | --   | pF   |
| C <sub>RSS</sub>                                                                    | Reverse Transfer Capacitance     |                                                                                    | --  | 2   | --   | pF   |
| Switching Characteristics                                                           |                                  |                                                                                    |     |     |      |      |
| Q <sub>g</sub>                                                                      | Total Gate Charge                | V <sub>DS</sub> =50V, I <sub>D</sub> =4A, V <sub>GS</sub> =10V                     | --  | 3.7 | --   | nC   |
| Q <sub>gs</sub>                                                                     | Gate Source Charge               |                                                                                    | --  | 0.8 | --   | nC   |
| Q <sub>gd</sub>                                                                     | Gate Drain Charge                |                                                                                    | --  | 1   | --   | nC   |
| t <sub>d(on)</sub>                                                                  | Turn-on Delay Time               | V <sub>DS</sub> =50V, I <sub>D</sub> =4A, V <sub>GS</sub> =10V, R <sub>G</sub> =3Ω | --  | 8   | --   | nS   |
| t <sub>r</sub>                                                                      | Turn-on Rise Time                |                                                                                    | --  | 16  | --   | nS   |
| t <sub>d(off)</sub>                                                                 | Turn-Off Delay Time              |                                                                                    | --  | 17  | --   | nS   |
| t <sub>f</sub>                                                                      | Turn-Off Fall Time               |                                                                                    | --  | 14  | --   | nS   |
| Source- Drain Diode Characteristics                                                 |                                  |                                                                                    |     |     |      |      |
| V <sub>SD</sub>                                                                     | Forward on voltage               | T <sub>J</sub> =25℃, I <sub>S</sub> =8A                                            | --  | --  | 1.2  | V    |

## Typical Operating Characteristics

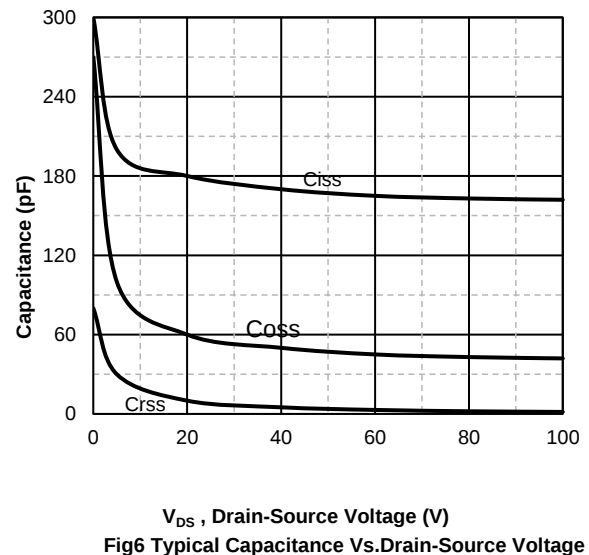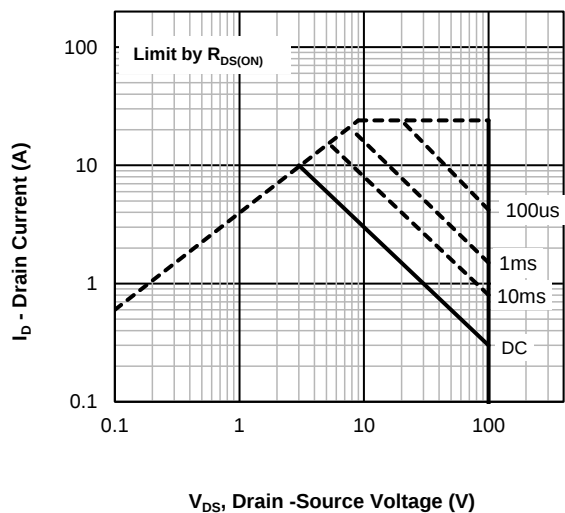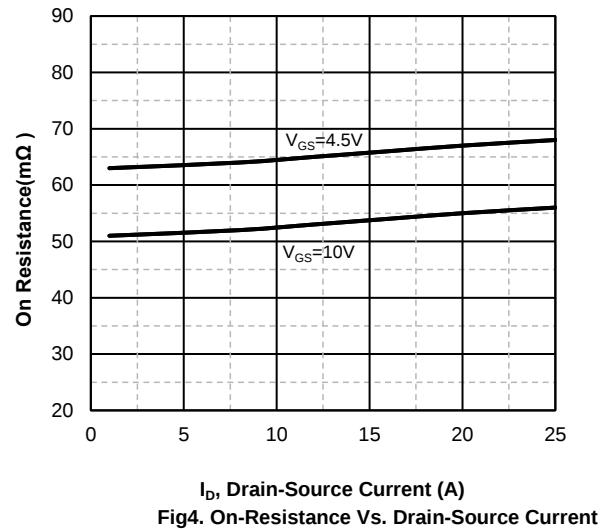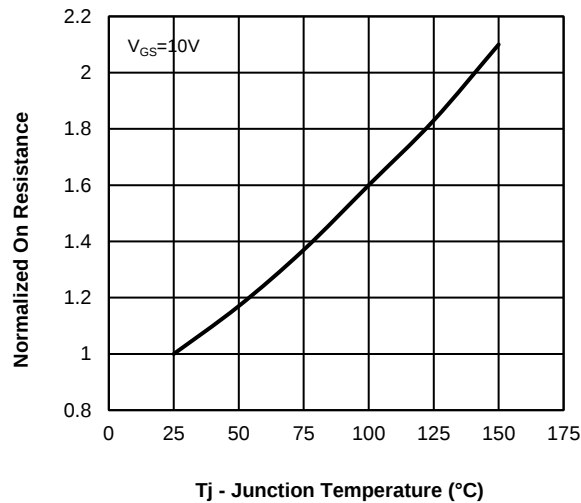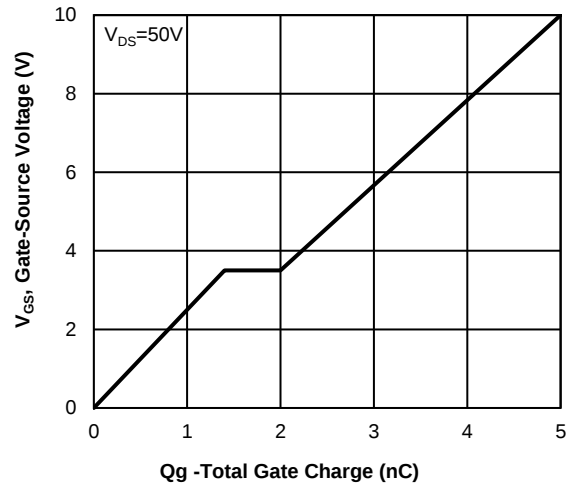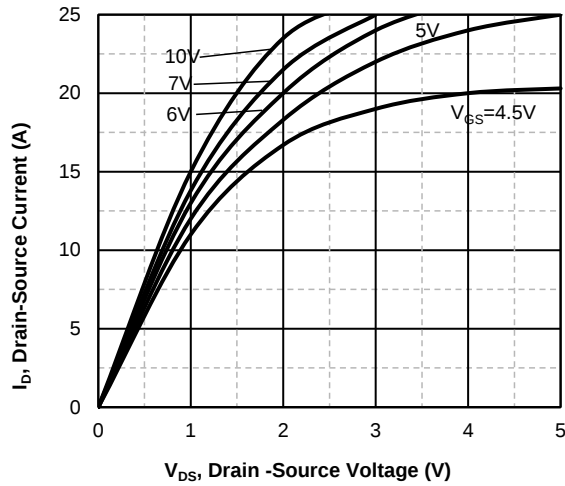

SOT-23-3L Package information

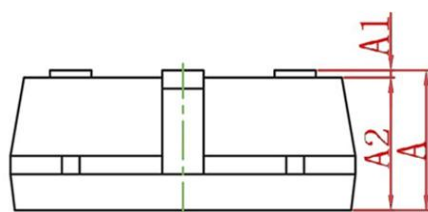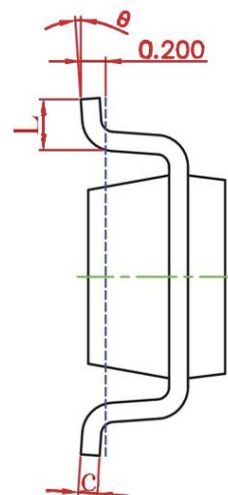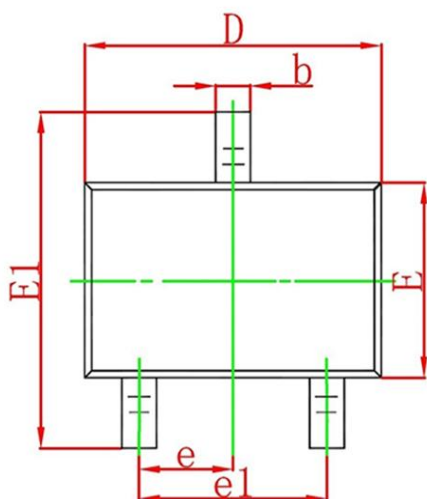

| Symbol | Dimensions in Millimeters(mm) |       | Dimensions In Inches |       |
|--------|-------------------------------|-------|----------------------|-------|
|        | Min                           | Max   | Min                  | Max   |
| A      | 1.050                         | 1.250 | 0.042                | 0.050 |
| A1     | 0.000                         | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                         | 1.150 | 0.042                | 0.046 |
| b      | 0.300                         | 0.500 | 0.012                | 0.020 |
| c      | 0.100                         | 0.200 | 0.004                | 0.008 |
| D      | 2.820                         | 3.020 | 0.112                | 0.120 |
| E      | 1.500                         | 1.700 | 0.060                | 0.068 |
| E1     | 2.650                         | 2.950 | 0.106                | 0.118 |
| e      | 0.950TYP                      |       | 0.037TYP             |       |
| e1     | 1.800                         | 2.000 | 0.071                | 0.079 |
| L      | 0.300                         | 0.600 | 0.012                | 0.024 |
| θ      | 0°                            | 8°    | 0°                   | 8°    |