

Features


- Leading trench technology for low $R_{DS(on)}$
- Low Gate Charge

Product Summary


V_{DS}	$R_{DS(ON)}$ TYP	I_D
-20V	85mΩ@-4.5V	-4.5A
	100mΩ@-2.5V	

Application


- Video monitor
- Power management



DFN2X2-6L view



Schematic diagram



Marking and pin assignment

2005P: Device code
 XXXX: Code
 Solid dot: Pin1 indicator



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V _{DS}	Drain-Source Breakdown Voltage		-20	V
V _{GS}	Gate-Source Voltage		±8	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	Tc=25°C	-4.5	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^\circ\text{C}$	-20.0	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	-4.5	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	0.7	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		125	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSM2005P	DFN2X2-6L	2005P	3,000	45,000	180,000	7"reel

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-20	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-20V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±8V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-0.45	-0.62	-1.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-4.5V, I _D =-4.5A	--	85	116	mΩ
		V _{GS} =-2.5V, I _D =-2.5A	--	100	155	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =-10V, V _{GS} =0V, f=1MHz	--	248	--	pF
C _{OSS}	Output Capacitance		--	42	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	31	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =-10V, I _D =-4.5A, V _{GS} =-4.5V	--	2.9	--	nC
Q _{gs}	Gate Source Charge		--	0.45	--	nC
Q _{gd}	Gate Drain Charge		--	0.75	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =-10V, R _L =5Ω, V _{GS} =-4.5V, R _G =3Ω	--	9.8	--	nS
t _r	Turn-on Rise Time		--	4.9	--	nS
t _{d(off)}	Turn-Off Delay Time		--	20.5	--	nS
t _f	Turn-Off Fall Time		--	7	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=-4.5A	--	--	-1.2	V

Typical Operating Characteristics

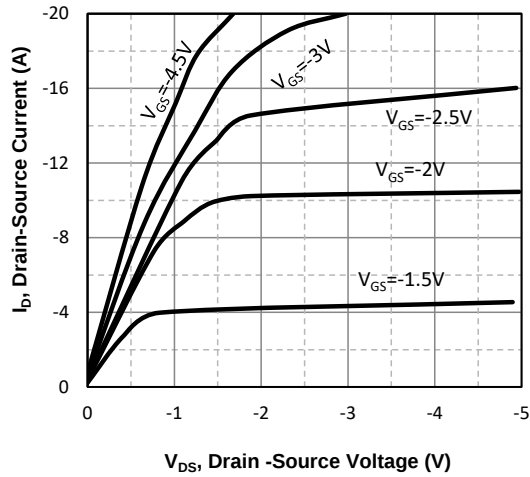


Fig1. Typical Output Characteristics

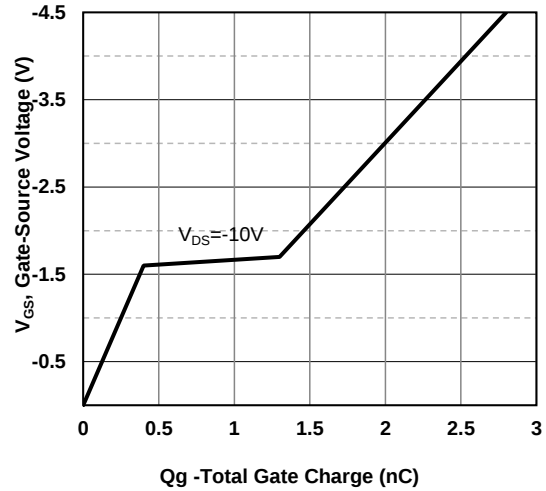


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

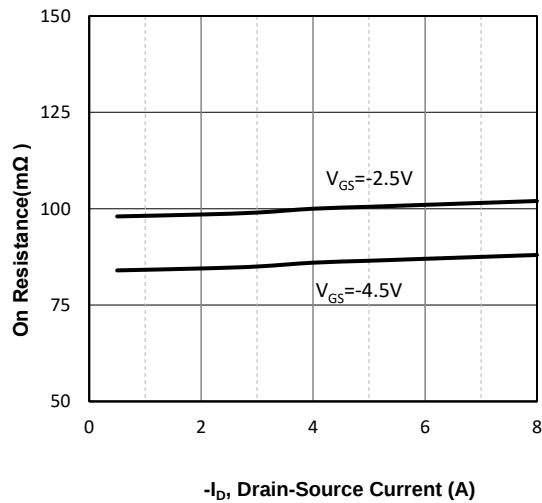


Fig3. Drain-Source on Resistance

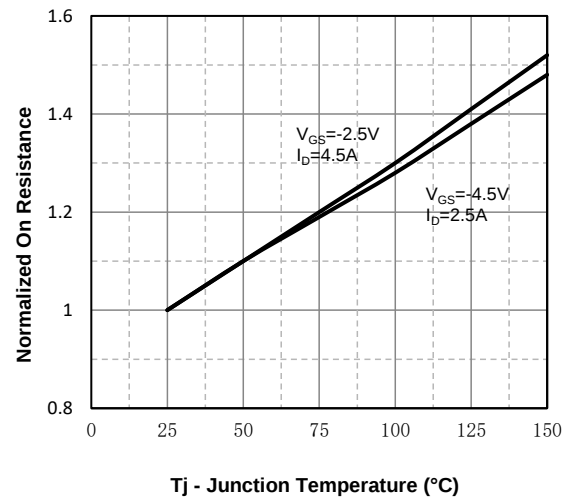


Fig4. Normalized On-Resistance Vs. Temperature

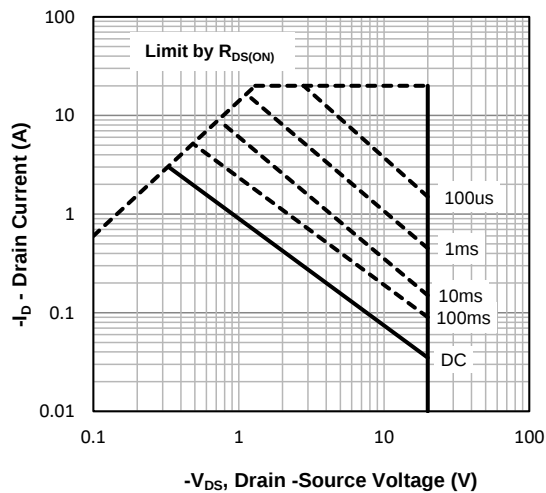


Fig5. Maximum Safe Operating Area



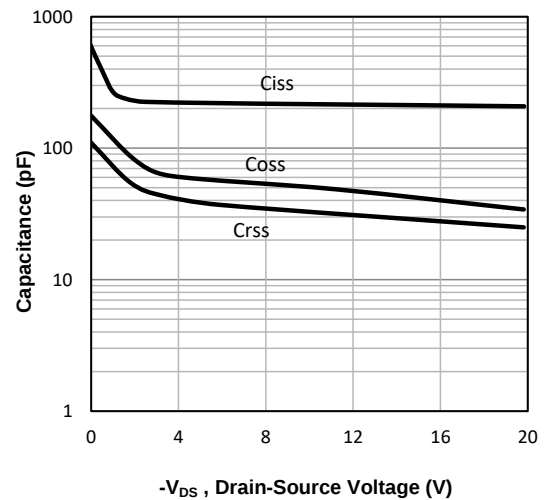


Fig6 Typical Capacitance Vs. Drain-Source Voltage


DFN2X2-6L Package information

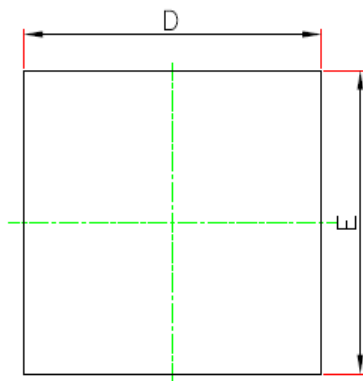

TOP VIEW
[顶视图]

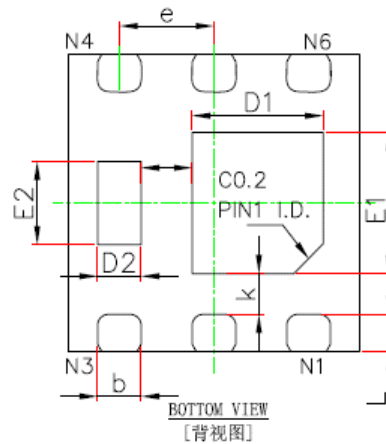

BOTTOM VIEW
[背视图]

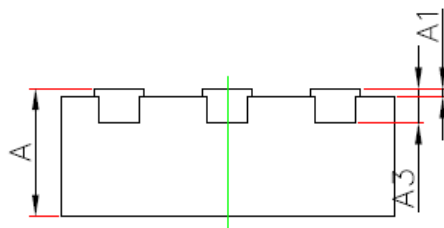

SIDE VIEW
[侧视图]

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.600	0.700	0.023	0.027
A1	0.000	0.050	0.000	0.001
A3	0.203REF		0.007REF	
b	0.315	0.415	0.012	0.016
D	1.924	2.076	0.075	0.081
E	1.924	2.076	0.075	0.081
e	0.650TYP		0.225TYP	
L	0.224	0.376	0.008	0.014
k	0.200	-	0.007	-
E1	1.000	1.200	0.039	0.047
D1	0.900	1.100	0.035	0.043
E2	0.700	0.900	0.027	0.035
D2	0.150	0.350	0.005	0.013