

Features

- Integrate fast recovery diode
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

Application

- Switch Mode Power Supply (SMPS)
- Motor Controls
- Power Factor Correction (PFC)



Halogen-Free

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
100V	30mΩ@10V	30A




TO-220



TO-251



TO-252



Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter		Value			Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			TO-220	TO-251	TO-252	
V _{DS}	Drain-Source Breakdown Voltage		100			V
V _{GS}	Gate-Source Voltage		±20			V
T _J	Maximum Junction Temperature		150			°C
T _{STG}	Storage Temperature Range		-50 to 155			°C
I _S	Diode Continuous Forward Current	Tc=25°C	30			A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	Tc=25°C	120	A
I_D	Continuous Drain Current@GS=10V	Tc=25°C	30	A
P_D	Maximum Power Dissipation	Tc=25°C	110	W
E_{AS}	Single pulse avalanche energy ^(Notes1)		335	mJ

Ordering Information (Example)







Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSY30N10	TO-220		50	1,000	5,000	/
MLSD30N10	TO-251		80	4,000	20,000	/
MLSU30N10	TO-252		2,500	5,000	35,000	13"reel

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	2	--	4	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =15A	--	30	38	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	1331	--	pF
C _{OSS}	Output Capacitance		--	276	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	88	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =80V, I _D =30A, V _{GS} =10V	--	53	--	nC
Q _{gs}	Gate Source Charge		--	6	--	nC
Q _{gd}	Gate Drain Charge		--	9	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =50V, I _D =10A, R _G =25Ω	--	39	--	nS
t _r	Turn-on Rise Time		--	45	--	nS
t _{d(off)}	Turn-Off Delay Time		--	207	--	nS
t _f	Turn-Off Fall Time		--	64	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=15A,	--	--	2	V


Note:

1、L=1mH, V_{DD}=50V, R_G=25Ω, Starting T_J=25°C

Typical Operating Characteristics

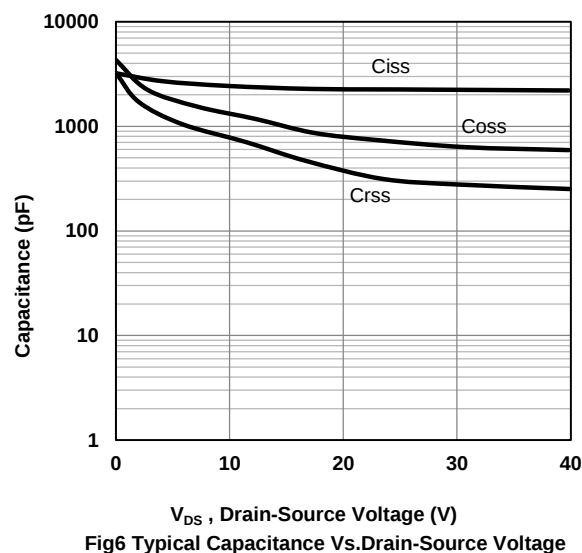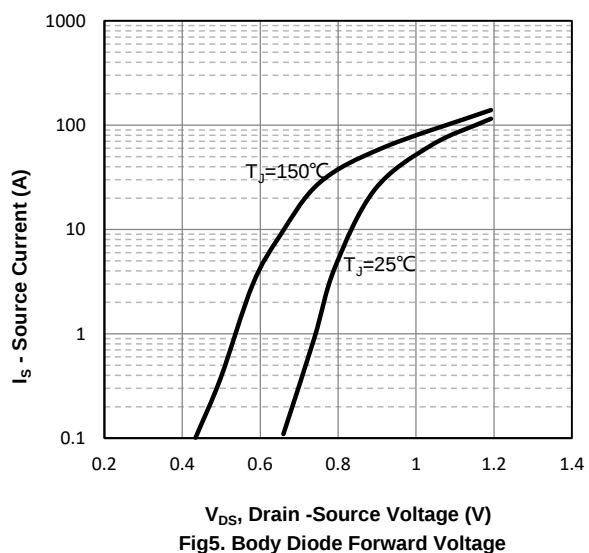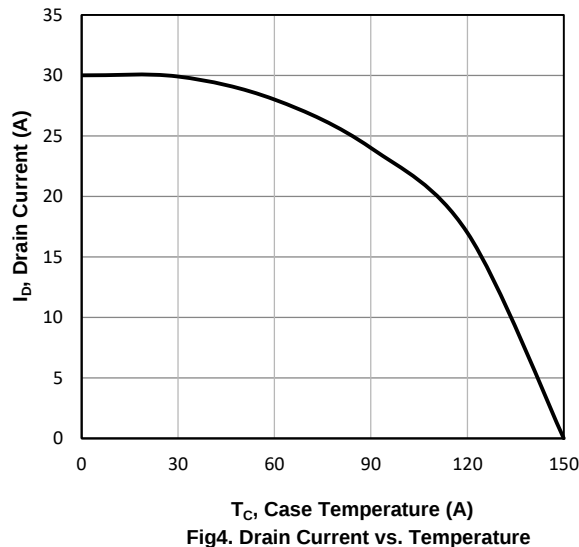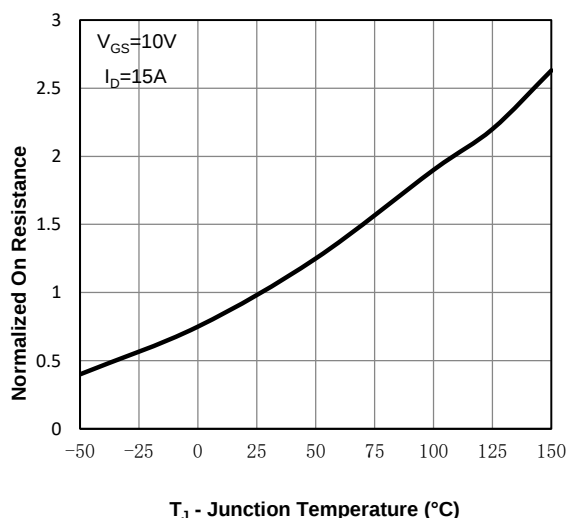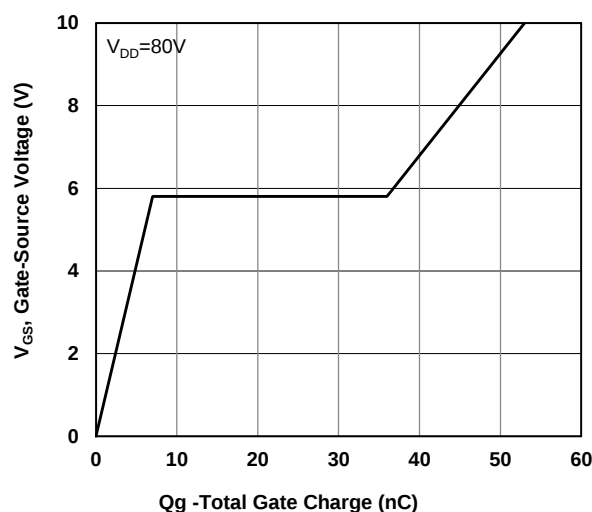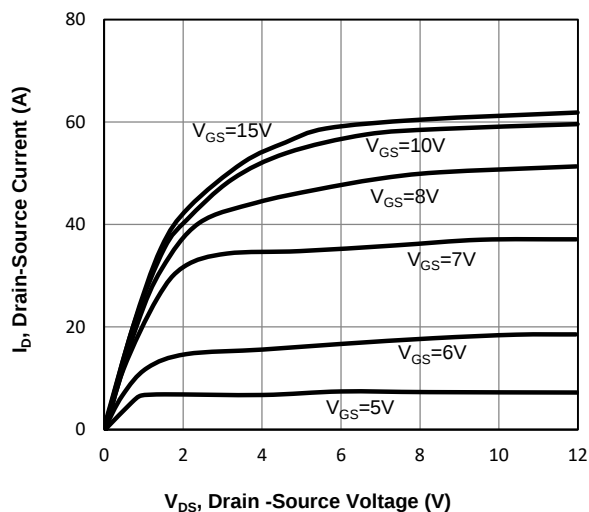


TO-251 Package information

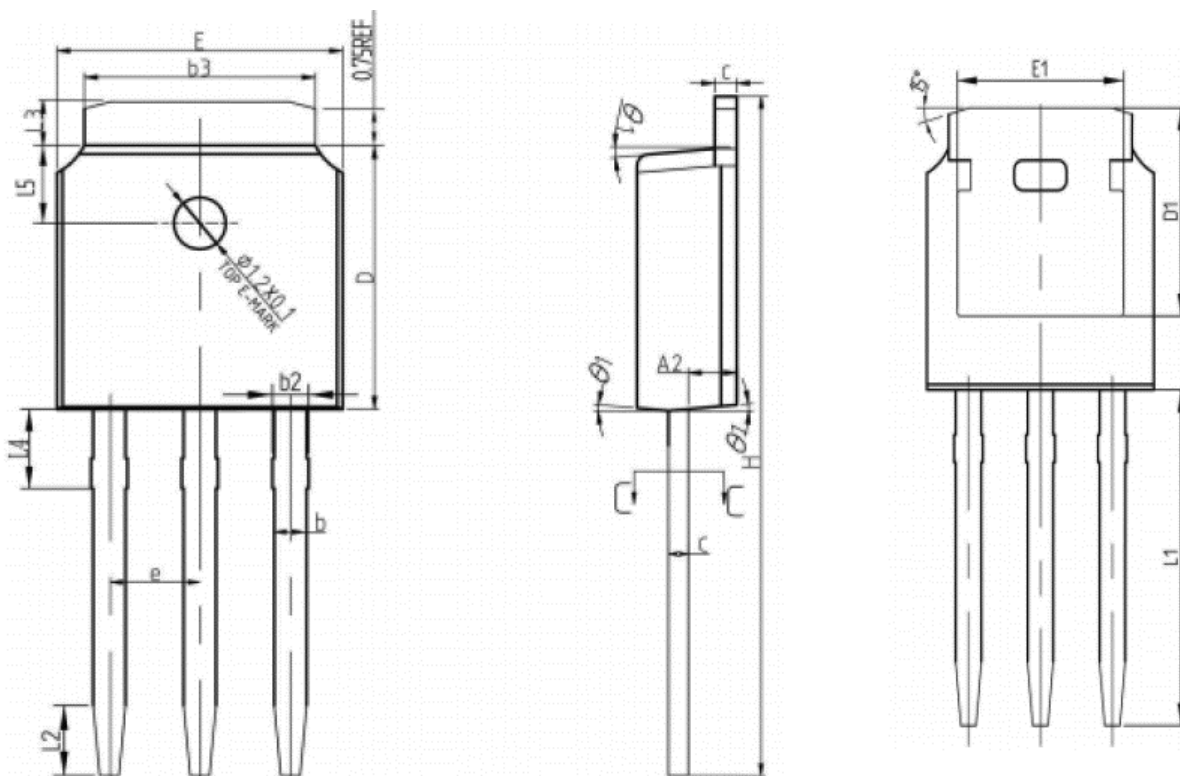


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.380	0.087	0.094
A2	0.970	1.170	0.038	0.046
b	0.720	0.850	0.028	0.034
b2	0.720	0.950	0.028	0.038
b3	5.230	5.460	0.207	0.216
c	0.470	0.580	0.019	0.023
D	6.000	6.200	0.237	0.245
D1	5.300 REF		0.210 REF	
E	6.500	6.700	0.257	0.265
E1	4.700	4.920	0.186	0.195
e	2.286 REF.		0.114 REF.	
H	16.100	16.600	0.637	0.656
L1	9.200	9.600	0.364	0.380
L2	1.250	1.460	0.049	0.058
L3	0.900	1.220	0.036	0.048
L4	0.950	1.150	0.038	0.045
L5	1.700	1.900	0.067	0.075
θ 1	5°	7°	5°	7°

TO-220 Package information

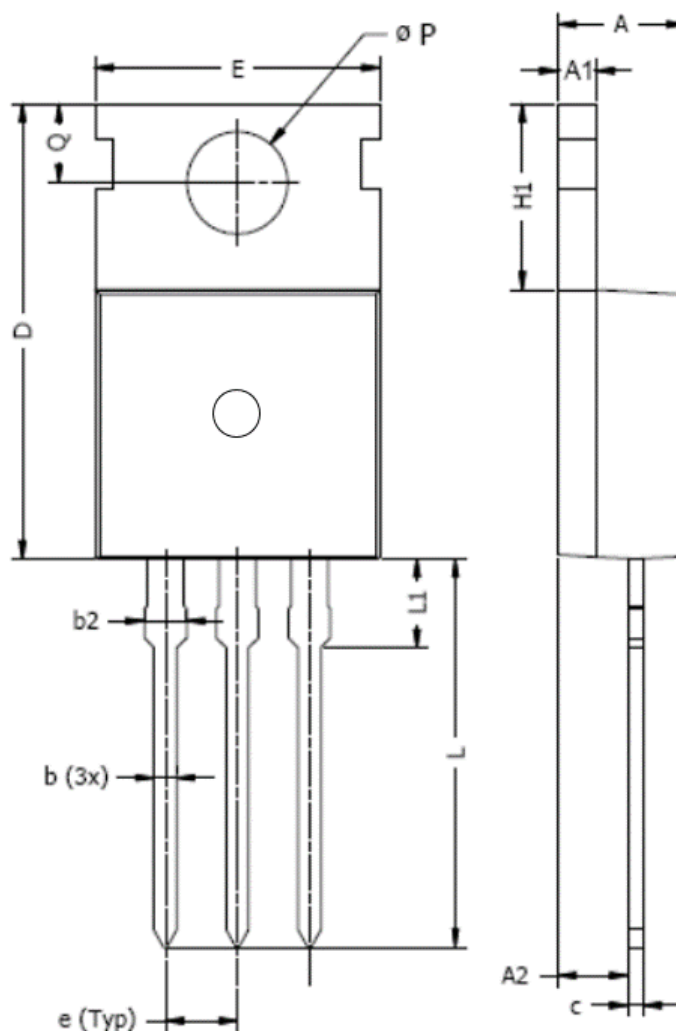

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	3.600	4.800	0.142	0.189
A1	1.200	1.400	0.047	0.055
A2	2.030	2.900	0.080	0.114
b	0.400	1.000	0.016	0.039
b2	1.200	1.780	0.047	0.070
c	0.360	0.600	0.014	0.024
D	14.220	16.500	0.561	0.651
e	2.340	2.740	0.092	0.108
E	9.700	10.600	0.383	0.418
H1	5.840	6.850	0.230	0.270
L	12.700	14.700	0.501	0.580
L1	2.700	3.300	0.106	0.130
ϕP	3.500	4.000	0.138	0.158
Q	2.540	3.400	0.100	0.134

TO-252 Package information

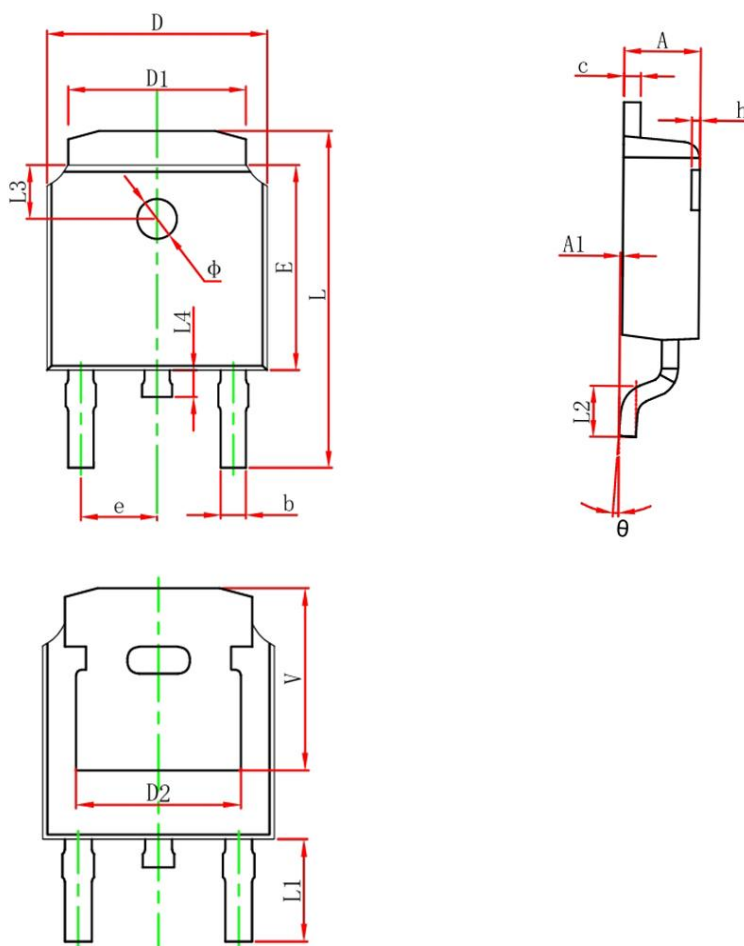

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
ϕ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	