

Features




- Integrate fast recovery diode
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

Application

- Switch Mode Power Supply (SMPS)
- Motor Controls
- Power Factor Correction (PFC)

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
250V	50mΩ@10V	40A



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)		TO-220F	TO-220
V_{DS}	Drain-Source Breakdown Voltage	250	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	Tc=25°C	40
Mounted on Large Heat Sink			
I_{DM}	Pulse Drain Current Tested	Tc=25°C	160
I_D	Continuous Drain Current@GS=10V	Tc=25°C	40
P_D	Maximum Power Dissipation	Tc=25°C	104
R_{thJA}	Thermal Resistance, Junction-to-Ambient	62.5	60
E_{AS}	Single pulse avalanche energy ^(Notes1)	191	mJ

Ordering Information (Example)







Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSYF40N25	TO-220F	MLSYF40N25	50	1,000	5,000	/
MLSY40N25	TO-220	MLSY40N25	50	1,000	5,000	/

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	250	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =250V, V _{GS} =0V	--	--	1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	2.0	--	4.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =20A	--	50	80	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	2800	--	pF
C _{OSS}	Output Capacitance		--	255	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	101	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =200V, I _D =9A, V _{GS} =10V	--	154	--	nC
Q _{gs}	Gate Source Charge		--	13	--	nC
Q _{gd}	Gate Drain Charge		--	58	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =125V, I _D =40A, R _G =25Ω	--	46	--	nS
t _r	Turn-on Rise Time		--	54	--	nS
t _{d(off)}	Turn-Off Delay Time		--	369	--	nS
t _f	Turn-Off Fall Time		--	96	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=40A,	--	--	1.5	V


Note:

1、L=10mH, V_{DD}=50V, R_G=25Ω, Starting T_J=25°C

Typical Operating Characteristics

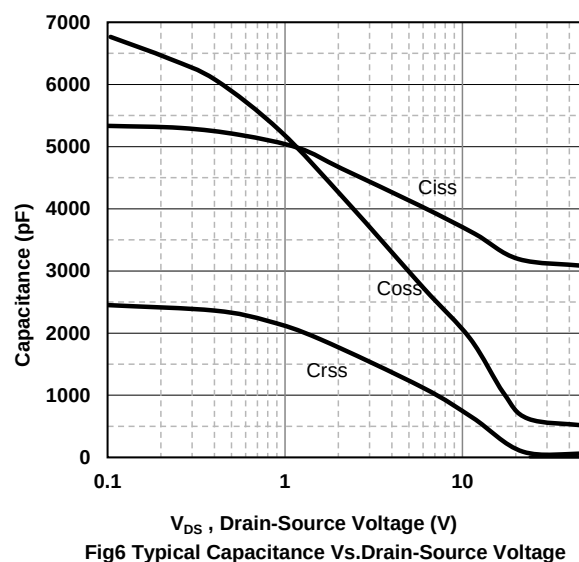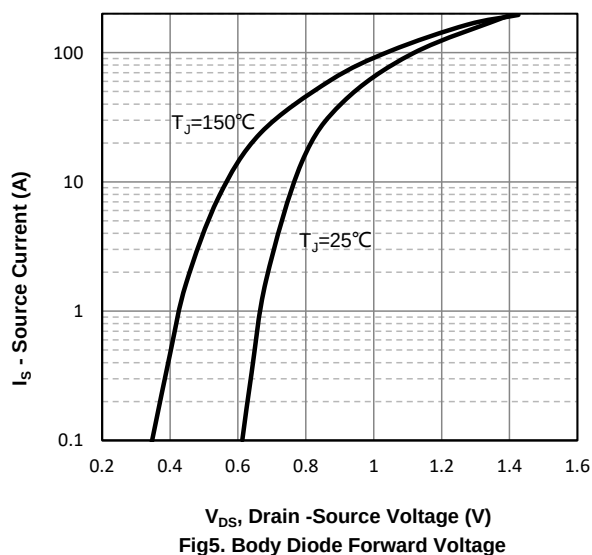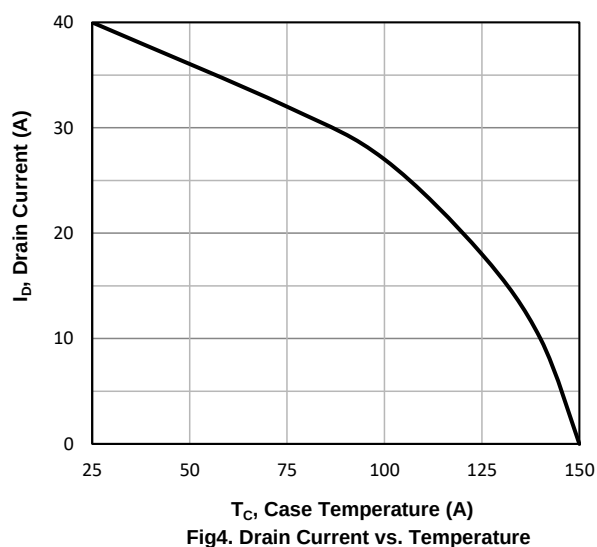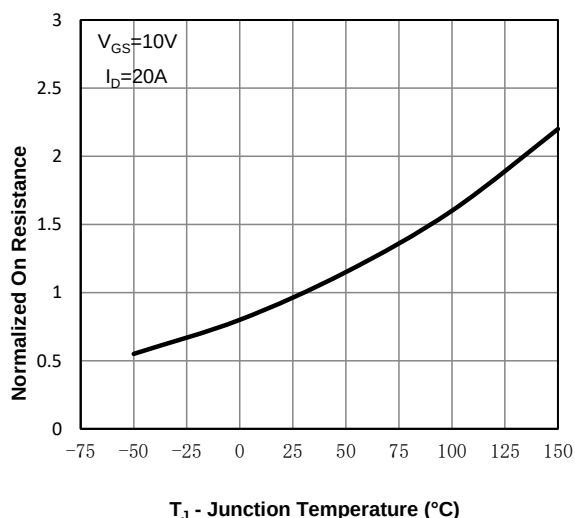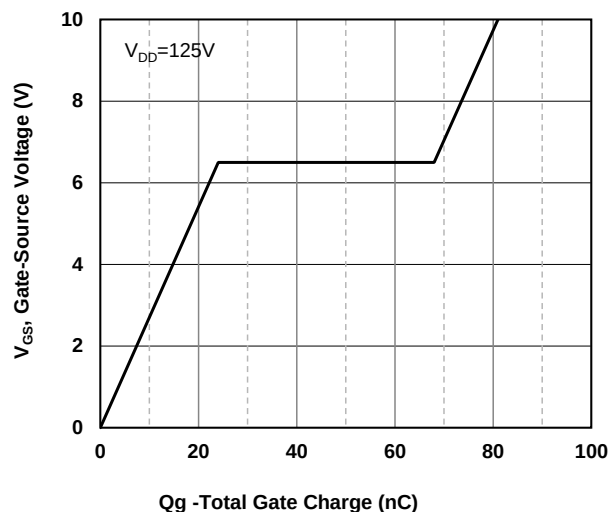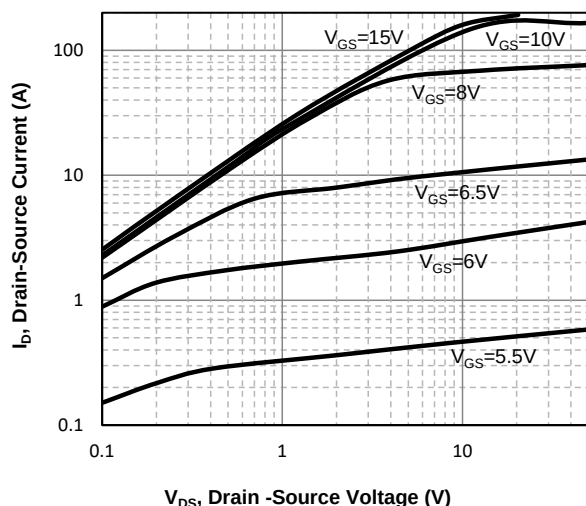


TO-220F Package information

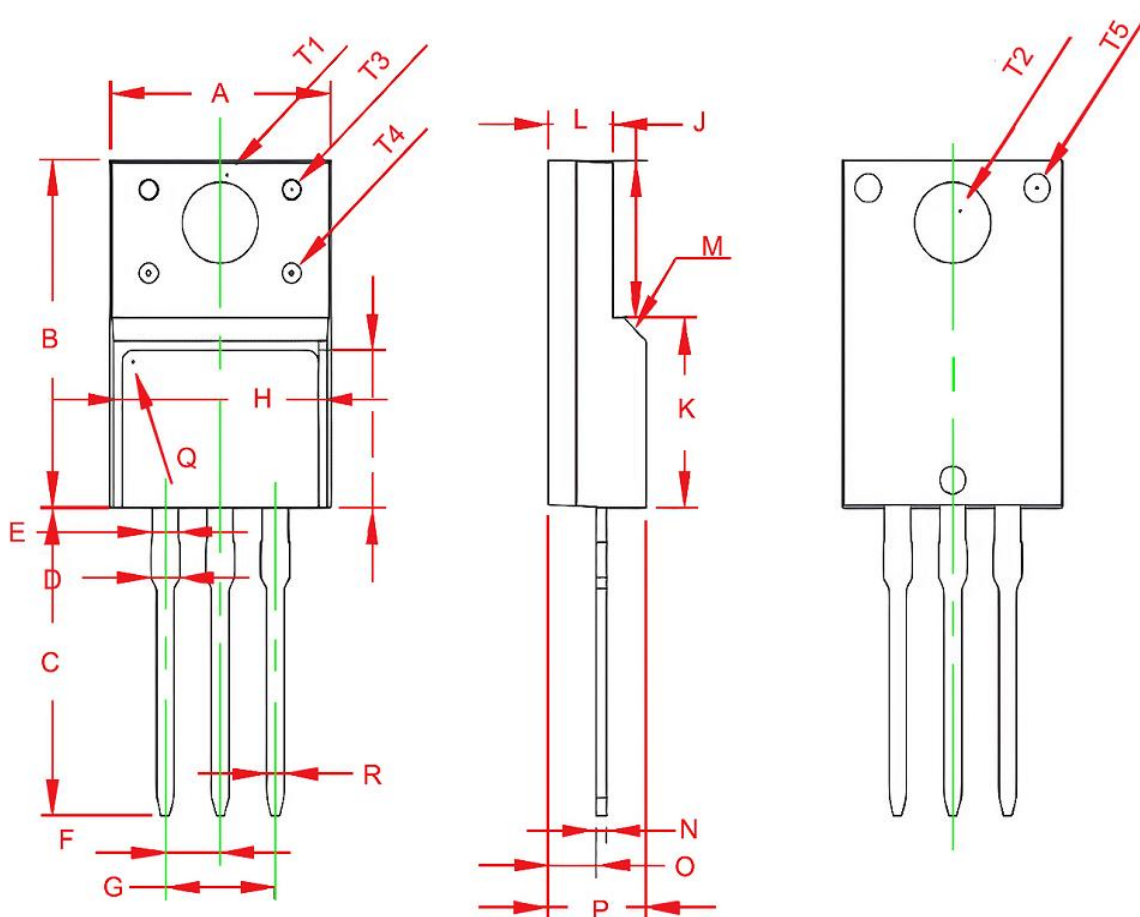

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	9.960	10.360	0.392	0.407
B	15.670	16.070	0.616	0.632
C	13.140	13.540	0.517	0.533
D	1.200	1.400	0.047	0.055
E	1.200TYP		0.047TYP	
F	2.540TYP		0.100TYP	
G	5.080TYP		0.200TYP	
H	7.600	8.000	0.299	0.314
I	7.100	7.500	0.279	0.295
J	6.480	6.880	0.255	0.270
K	8.990	9.390	0.353	0.369
L	2.340	2.740	0.092	0.107
M	45°TYP		45°TYP	
N	0.490	0.520	0.019	0.020
O	2.150	2.550	0.084	0.100
P	4.500	4.900	0.177	0.192
Q	0.500TYP		0.019TYP	
S	4.5°TYP		4.5°TYP	
T1	3.450TYP		0.135TYP	
T2	3.180TYP		0.125TYP	
T3	1.500TYP		0.059TYP	
T4	1.200TYP		0.047TYP	
T5	1.500TYP		0.059TYP	
R	0.770	0.830	0.030	0.032

TO-220 Package information

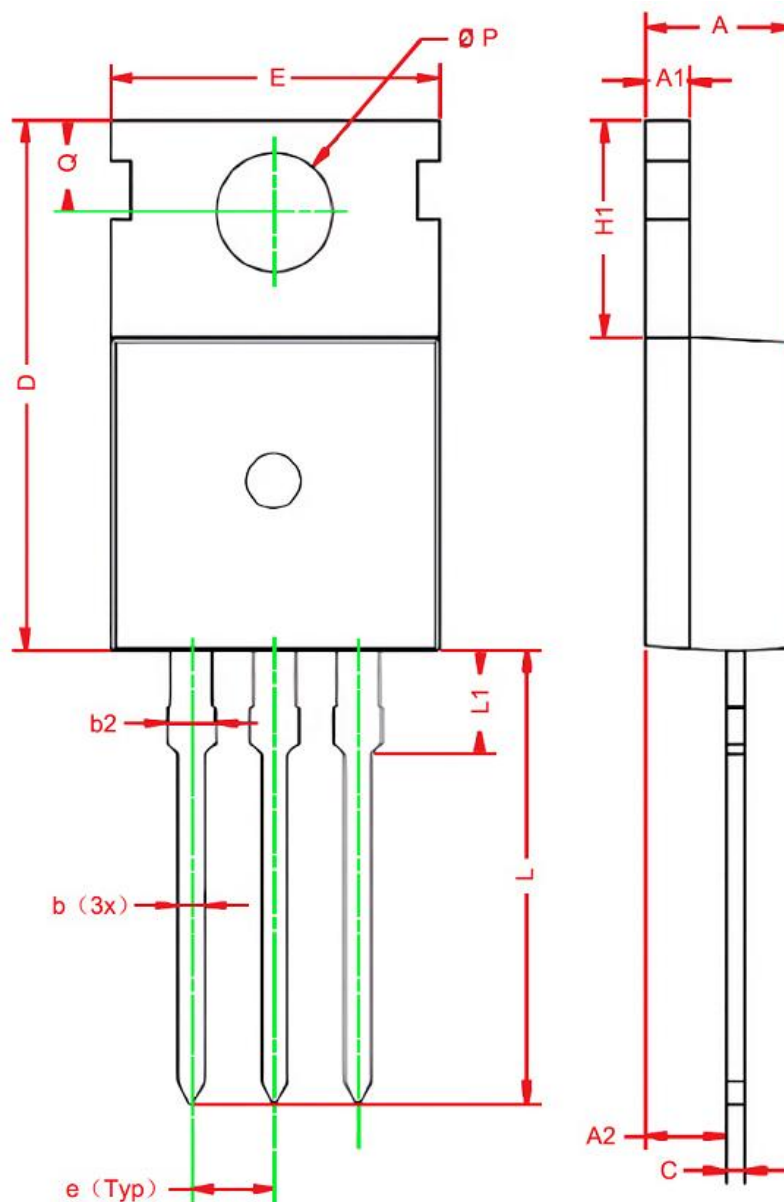

Symbol	Dimensions in Millimeters(mm)		Dimensions in Inches	
	Min	Max	Min	Max
A	3.600	4.800	0.142	0.189
A1	1.200	1.400	0.047	0.055
A2	2.030	2.900	0.080	0.114
b	0.400	1.000	0.016	0.039
b2	1.200	1.780	0.047	0.070
c	0.360	0.600	0.014	0.024
D	14.220	16.500	0.561	0.651
e	2.340	2.740	0.092	0.108
E	9.700	10.600	0.383	0.418
H1	5.840	6.850	0.230	0.270
L	12.700	14.700	0.501	0.580
L1	2.700	3.300	0.106	0.130
ϕP	3.500	4.000	0.138	0.158
Q	2.540	3.400	0.100	0.134