


Features


- Complementary to MMST3906



SOT-323 top view



Schematic diagram



Marking and pin assignment



Pb-Free



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	200	mA
P_C	Collector Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	625	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)







Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MMST3904	SOT-323	K2N	3,000	45,000	180,000	7"reel

Electrical Characteristics (Ta=25°C unless otherwise specified)


Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}^*$	Collector-base breakdown voltage	$I_C=10\mu A, I_E=0$	60	--	--	V
$V_{(BR)CEO}^*$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	40	--	--	V
$V_{(BR)EBO}^*$	Emitter-base breakdown voltage	$I_E=10\mu A, I_C=0$	5	--	--	V
I_{CBO}^*	Collector cut-off current	$V_{CB}=60V, I_E=0$	--	--	60	nA
I_{CEX}	Collector cut-off current	$V_{CE}=30V, V_{BE(off)}=3V$	--	--	50	nA
H_{FE}^*	DC current gain	$V_{CE}=1V, I_C=100\mu A$	40	--	--	
		$V_{CE}=1V, I_C=1mA$	70			
		$V_{CE}=1V, I_C=10mA$	100		300	
		$V_{CE}=1V, I_C=50mA$	60			
$V_{CE(sat)}^*$	Collector-emitter saturation voltage	$I_C=10mA, I_B=1mA$	--	--	0.25	V
		$I_C=50mA, I_B=5mA$	--	--	0.3	V
$V_{BE(sat)}^*$	Base-emitter saturation voltage	$I_C=10mA, I_B=1mA$	--	--	0.85	V
		$I_C=50mA, I_B=5mA$	--	--	0.95	V
f_T	Transition frequency	$V_{CE}=20V, I_C=10mA, f=100MHz$	300	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=5V, I_E=0, f=1MHz$	--	--	4	pF
C_{ib}	Collector output capacitance	$V_{EB}=0.5V, I_E=0, f=1MHz$	--	--	8	pF
t_d	Delay time	$V_{CC}=3V, V_{BE(off)}=0.5V, I_C=10mA, I_{B1}=1mA$	--	--	35	ns
t_r	Rise time		--	--	35	ns
t_s	Storage time	$V_{CC}=3V, I_C=10mA, I_{B1}=I_{B2}=1mA$	--	--	225	ns
t_f	Fall time		--	--	75	ns

*Pulse test: pulse width $\leq 300\mu s$, duty cycles $\leq 2.0\%$.

Typical Characteristics

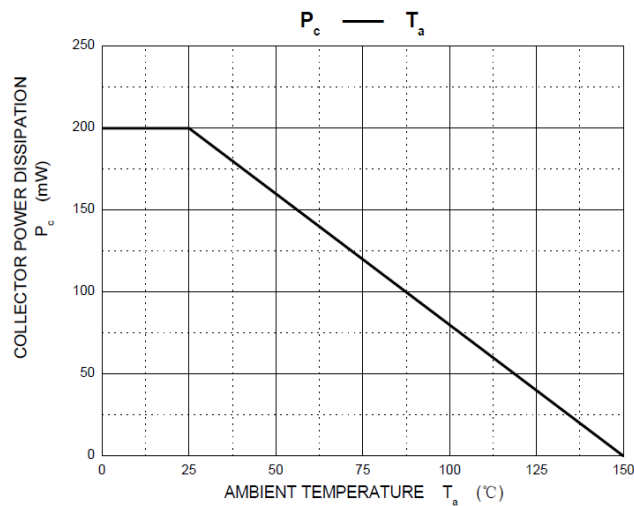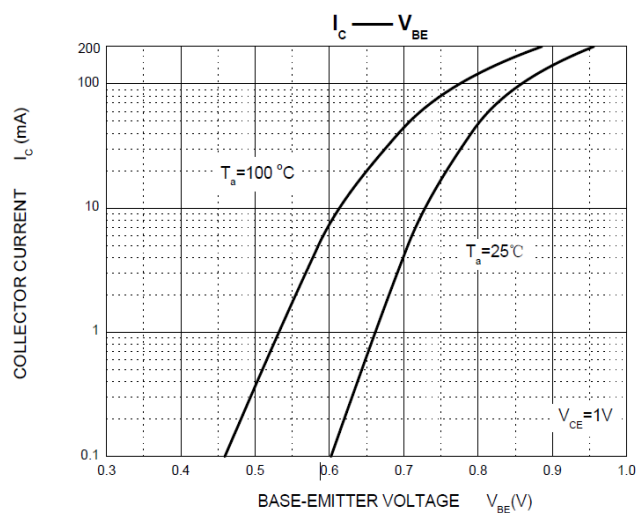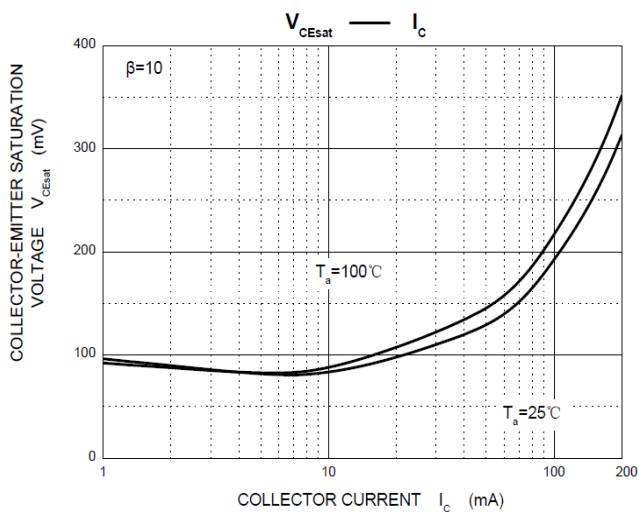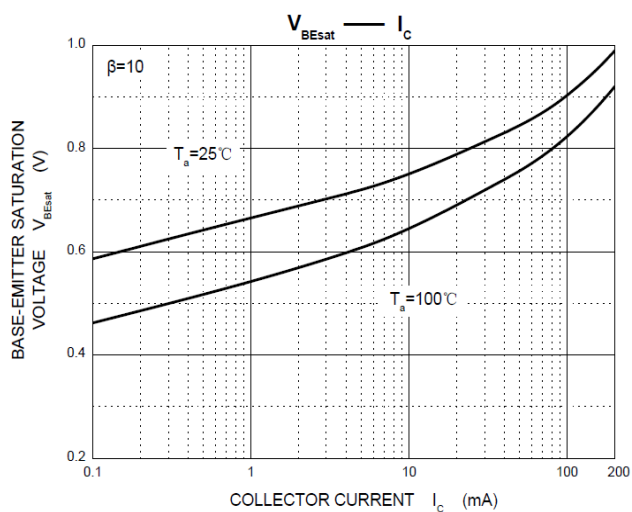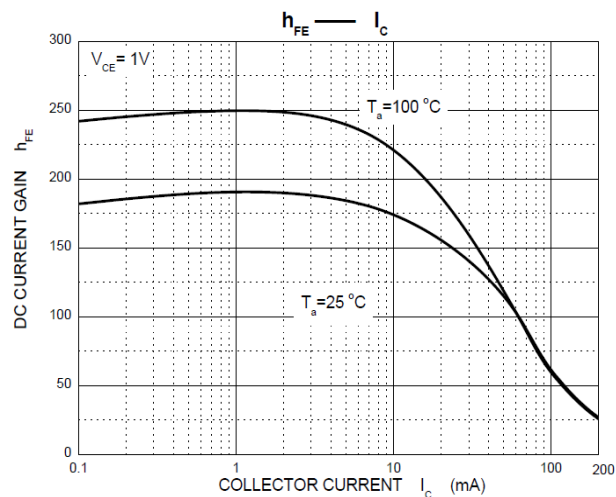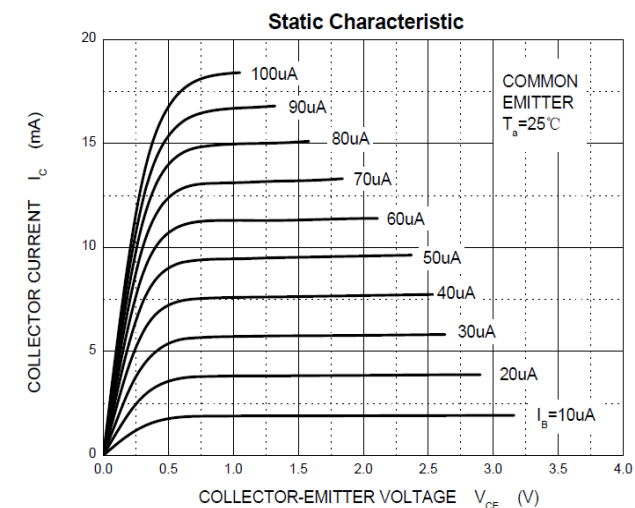

SOT-323 Package information

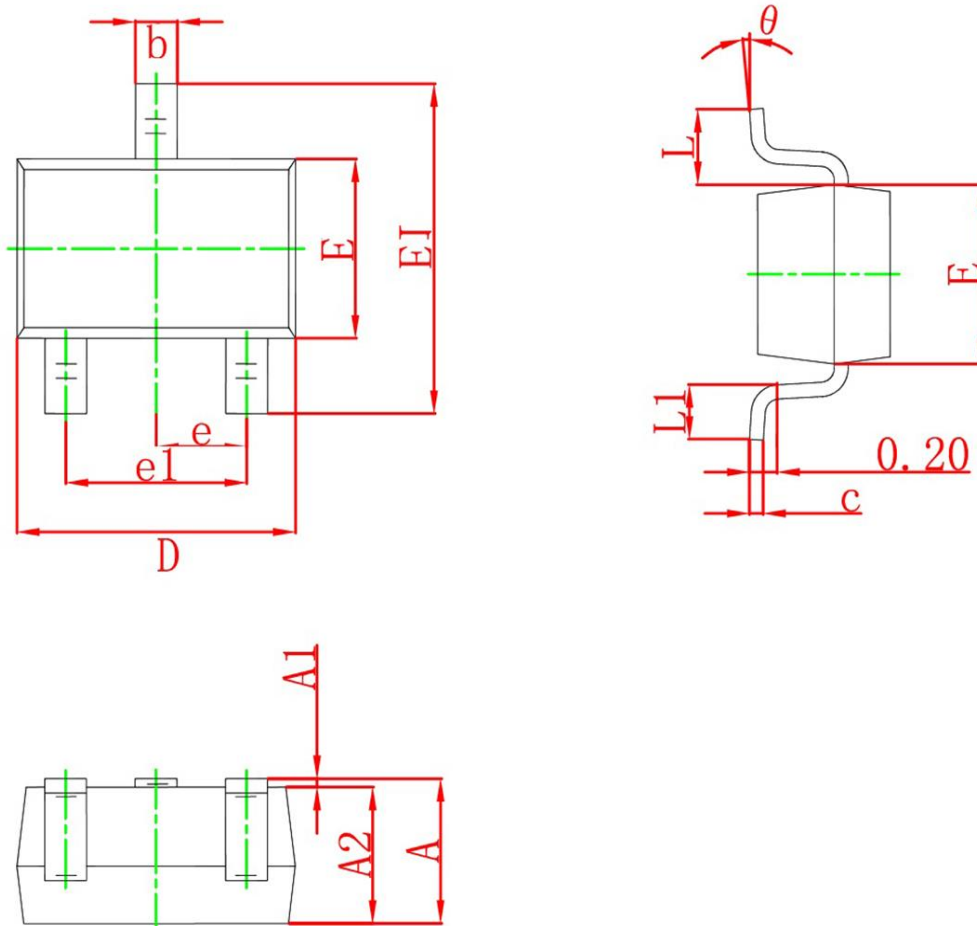

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°