

Features

- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Split gate trench MOSFET technology
- Fast switching and soft recovery

Application

- Consumer electronic power supply
- Motor control
- Synchronous-rectification
- Isolated DC/DC convertor



MU0G120AG: Device code
 XXXX : Code


Marking and pin assignment

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
60V	3.8mΩ@10V	120A
	5.0mΩ@4.5V	



TO-252 view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V_{DS}	Drain-Source Breakdown Voltage	60	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	$T_C=25^{\circ}C$ 120	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}C$ 360	A
I_D	Continuous Drain Current	$T_C=25^{\circ}C$ 120	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}C$ 62.5	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	75	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MU0G120AG	TO-252	MU0G120AG	2,500	5,000	35,000	13"reel

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
--------	-----------	-----------	-----	-----	-----	------

Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

BV _(BR) DSS	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	60	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =60V, V _{GS} =0V	--	--	1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.6	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =20A	--	3.8	5.0	mΩ
		V _{GS} =4.5V, I _D =10A	--	5.0	7.0	mΩ

Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

C _{ISS}	Input Capacitance	V _{DS} =30V, V _{GS} =0V, f=1MHz	--	1692	--	pF
C _{OSS}	Output Capacitance		--	475	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	35	--	pF

Switching Characteristics

Q _g	Total Gate Charge	V _{DS} =30V, I _D =20A, V _{GS} =10V	--	48.2	--	nC
Q _{gs}	Gate Source Charge		--	7.2	--	nC
Q _{gd}	Gate Drain Charge		--	10.6	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =30V, R _L =1.5Ω, V _{GS} =10V, R _G =6Ω	--	15.6	--	nS
t _r	Turn-on Rise Time		--	3.1	--	nS
t _{d(off)}	Turn-Off Delay Time		--	3.6	--	nS
t _f	Turn-Off Fall Time		--	5.6	--	nS

Source- Drain Diode Characteristics

V _{SD}	Forward on voltage	T _J =25°C, I _S =10A	--	--	1.2	V
-----------------	--------------------	---	----	----	-----	---

Typical Operating Characteristics

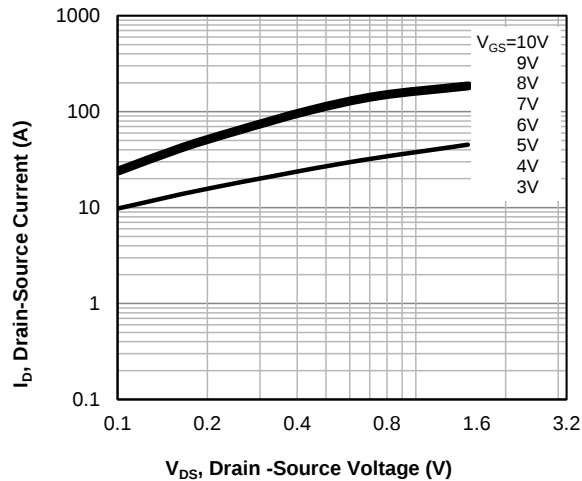


Fig1. Typical Output Characteristics

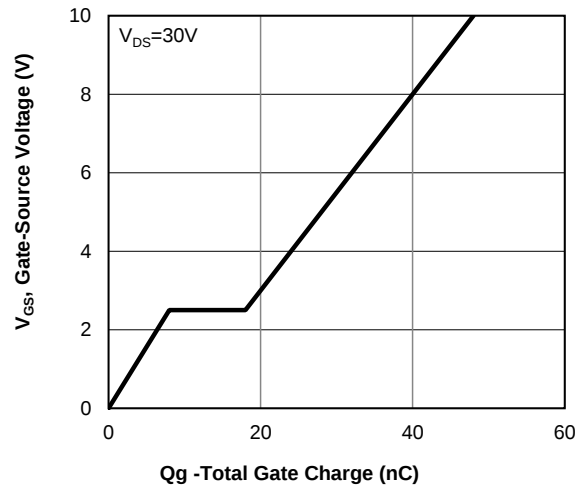


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

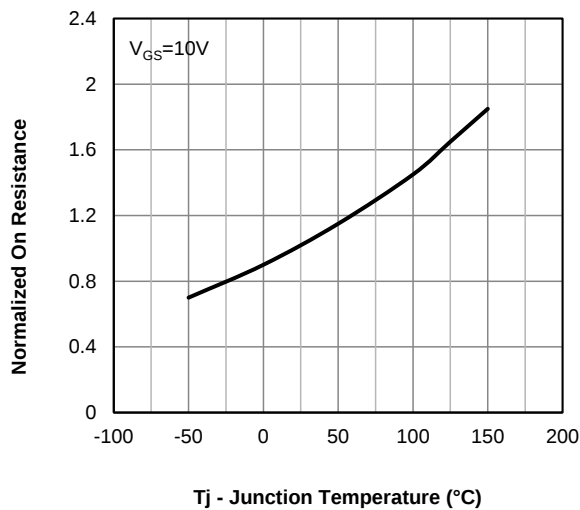


Fig3. Normalized On-Resistance Vs. Temperature

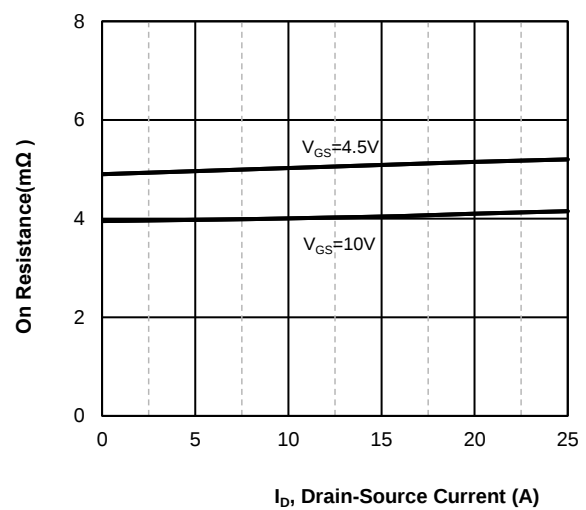


Fig4. On-Resistance Vs. Drain-Source Current

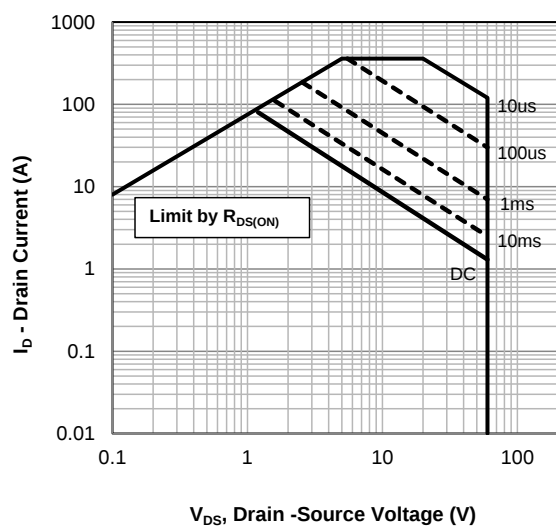


Fig5. Maximum Safe Operating Area


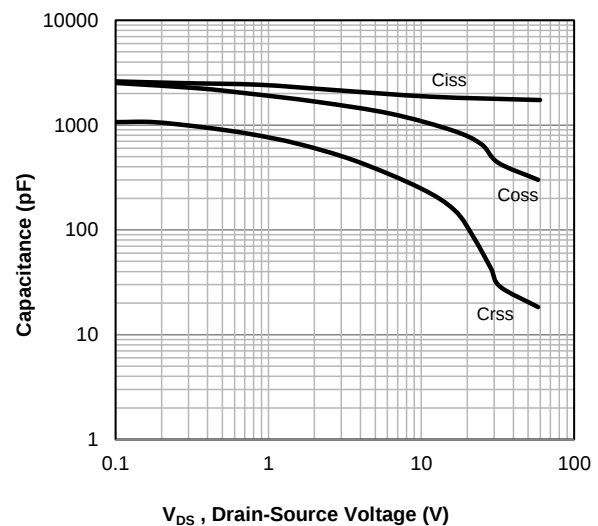


Fig6 Typical Capacitance Vs. Drain-Source Voltage

TO-252 Package information

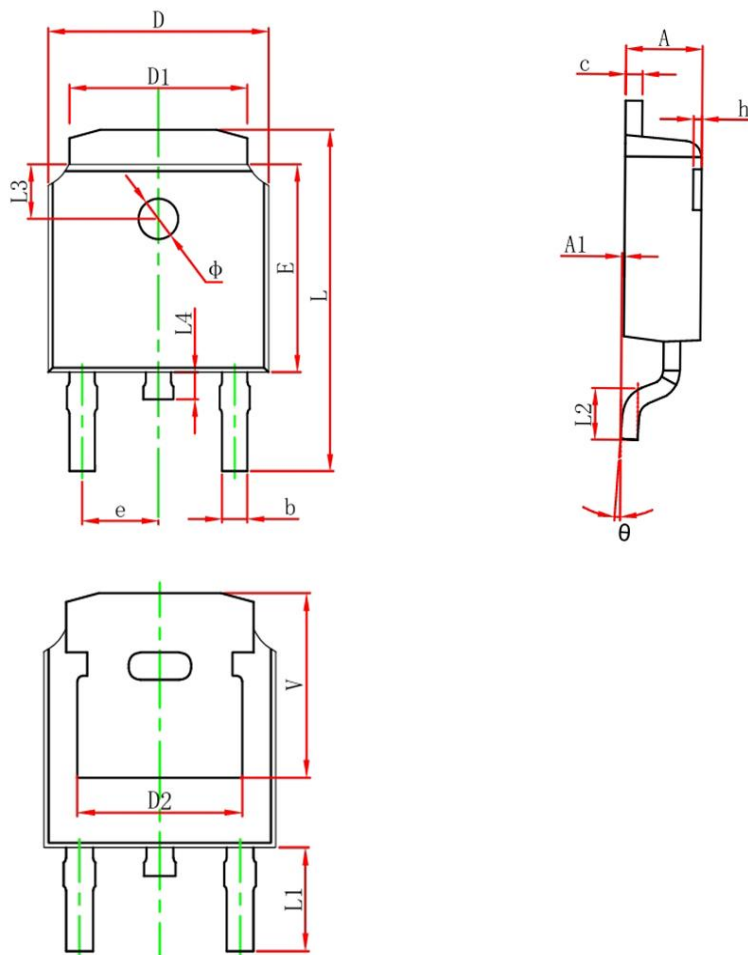

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
ϕ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	