

Features

- $I_{F(AV)}$ 15A
- V_{RRM} 100V
- High surge current capability
- Low peak forward voltage

Applications


- Rectifier

Marking

- ST15100L:ST15100L



TO-277 top view



Schematic diagram



Pb-Free



Halogen-Free

Limiting Values(Absolute Maximum Rating)

Symbol	Parameter	Test Conditions	ST15100L	Unit
V_{RRM}	Repetitive Peak Reverse Voltage		100	V
V_{RMS}	Maximum RMS Voltage		70	V
$I_{F(AV)}$	Average Forward Current	60Hz Half-sine wave, Resistance load, $T_L=125^{\circ}C$	15	A
I_{FSM}	Surge(Non-repetitive)Forward Current	60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}C$	200	A
T_J	Junction Temperature		-55~+150	$^{\circ}C$
T_{STG}	Storage Temperature		-55~+150	$^{\circ}C$

Electrical Characteristics (T=25°C Unless otherwise specified)

Symbol	Parameter	Condition	ST15100L	Unit
V_F	Peak Forward Voltage	$I_F=15.0A$ $T_a=25^{\circ}C$	0.67(TYP) 0.74(MAX)	V
		$I_F=15.0A$ $T_a=125^{\circ}C$	0.62(TYP) 0.68(MAX)	
I_{RRM1}	Peak Reverse Current	$V_{RM}=V_{RRM}$ $T_a=25^{\circ}C$	0.02(TYP) 0.08(MAX)	mA
I_{RRM2}		$V_{RM}=V_{RRM}$ $T_a=125^{\circ}C$	10(TYP) 20(MAX)	
$R_{\theta J-A}$	Thermal Resistance(Typical)	Between junction and ambient	80	$^{\circ}C/W$
$R_{\theta J-L}$		Between junction and terminal	5	
C_J	Typical junction capacitance	$V_R=4.0V$, $f=1MHz$	0.95	nF

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

Typical Operating Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

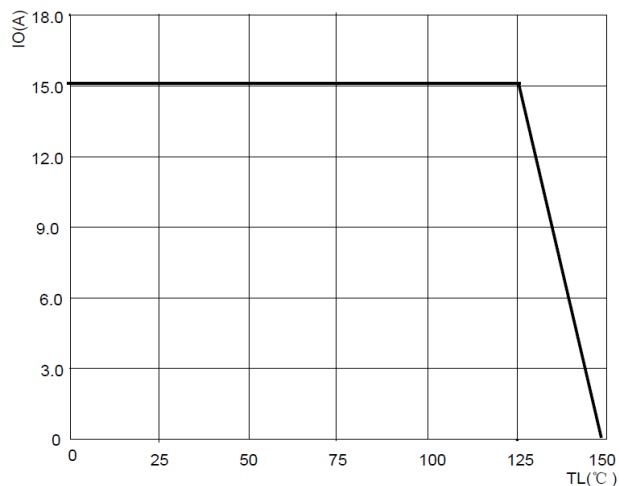


FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

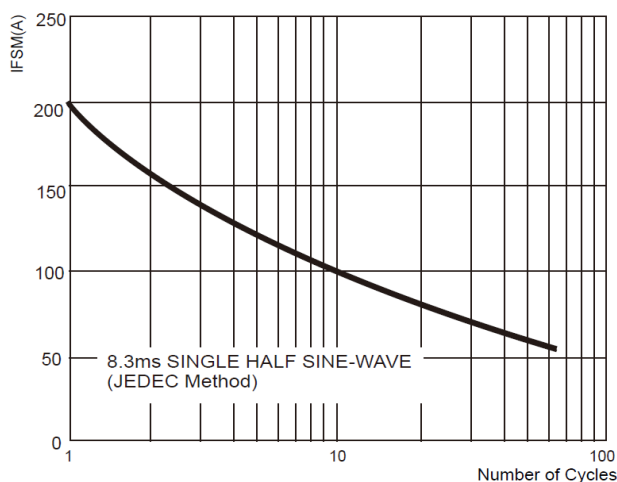


FIG3: Instantaneous Forward Voltage



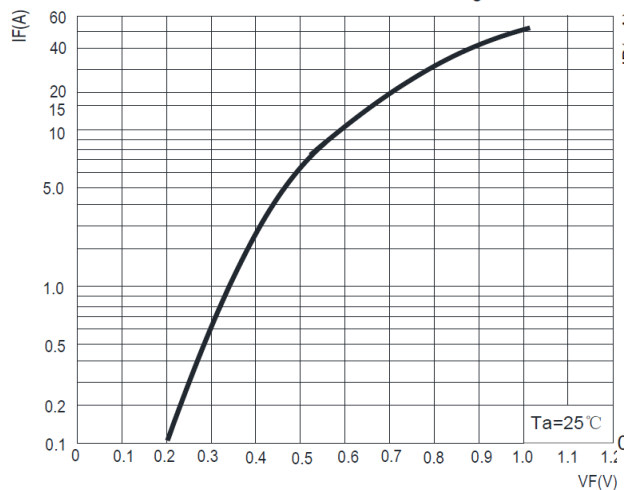


FIG.4: TYPICAL REVERSE CHARACTERISTICS

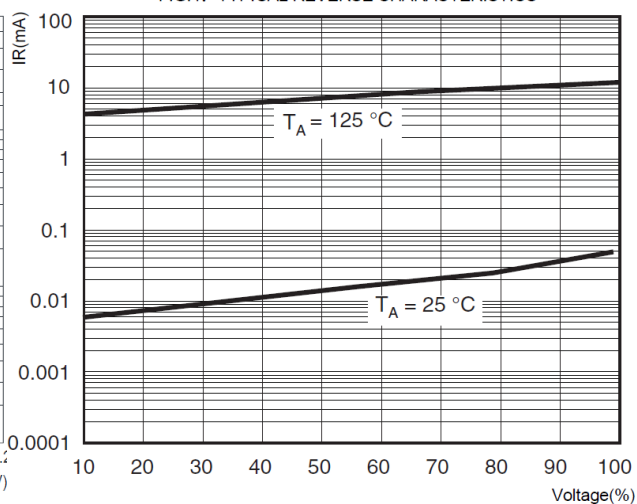

TO-277 Package information

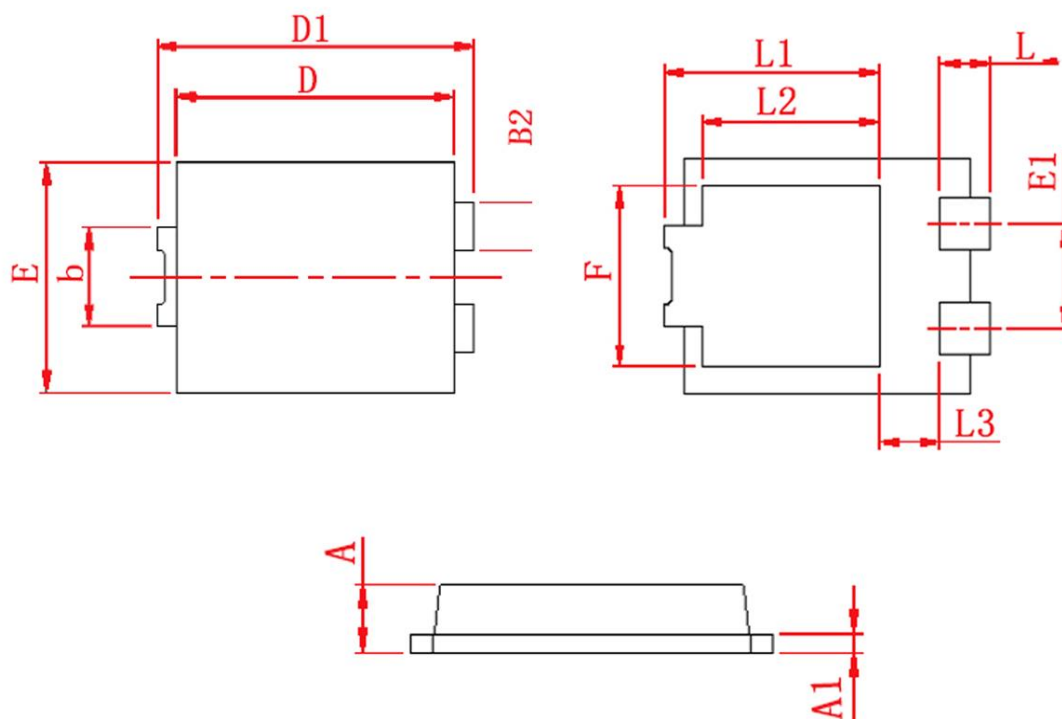

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
D1	6.400	6.600	0.252	0.260
D	5.600	5.800	0.220	0.228
E	4.100	4.300	0.161	0.169
b	1.700	1.900	0.067	0.075
B2	0.800	1.000	0.031	0.039
A	1.050	1.200	0.041	0.047
A1	0.300	0.400	0.012	0.016
L	0.850	1.100	0.033	0.043
L1	4.200	4.400	0.165	0.173
L2	3.52Typ		0.139Typ	
L3	1.100	1.400	0.043	0.055
F	3.000	3.300	0.118	0.130
E1	1.86Typ		0.073Typ	