



Features


- Complementary to 2SC1623
- High DC Current Gain: $h_{FE}=200$ TYP.
($V_{CE}=-6V, I_C=-1mA$)
- High Voltage: $V_{ceo}=-50V$



SOT-23 top view



Schematic diagram



Marking and pin assignment

X:Rank



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-50	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-100	mA
P_C	Collector Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	625	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)



Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SA812	SOT-23	M4/M5/M6/M7	3,000	45,000	180,000	7"reel







Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=-100\mu A, I_E=0$	-60	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-1mA, I_B=0$	-20	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=-100\mu A, I_C=0$	-5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=-60V, I_E=0$	--	--	-0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=-5V, I_C=0$	--	--	-0.1	μA
H_{FE}	DC current gain	$V_{CE}=-6V, I_C=-1mA$	90	--	600	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=-100mA, I_B=-10mA$	--	--	-0.3	V
V_{BE}	Base-emitter voltage	$I_C=-1mA, V_{CE}=-6V$	-0.58		-0.68	
C_{ob}	Collector output capacitance	$V_{CB}=-10V, I_E=0, f=1MHz$	--	5	--	pF
f_T	Transition frequency	$V_{CE}=-6V, f=-10mA$	--	180	--	MHz


Classification of hFE

Rank	M4	M5	M6	M7
Marking	M4	M5	M6	M7
Range	90-180	135-270	200-400	300-600

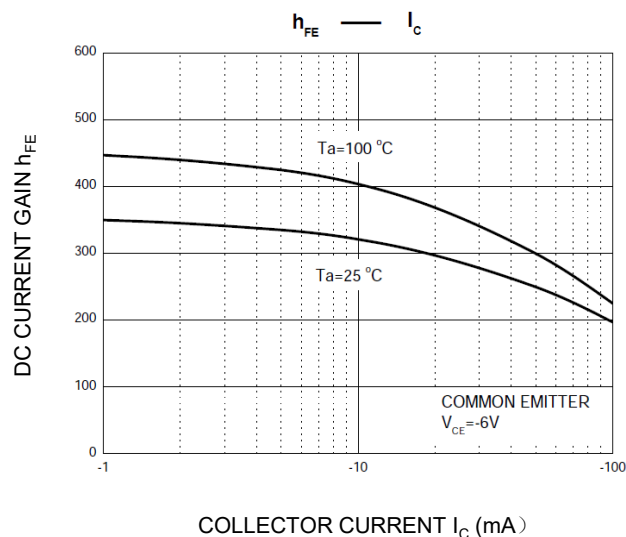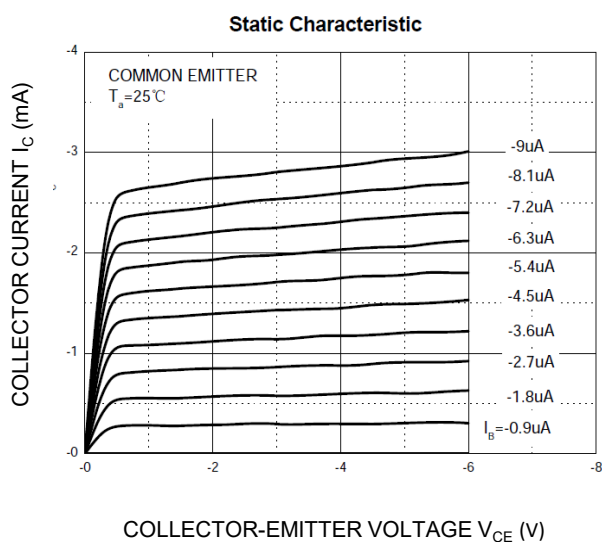Typical Operating Characteristics

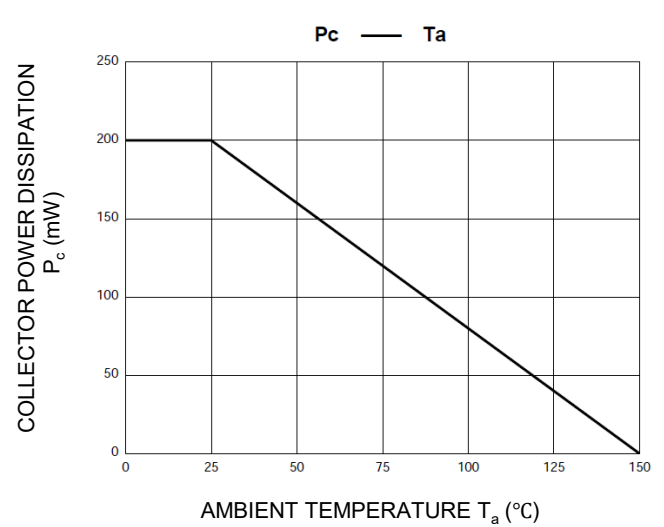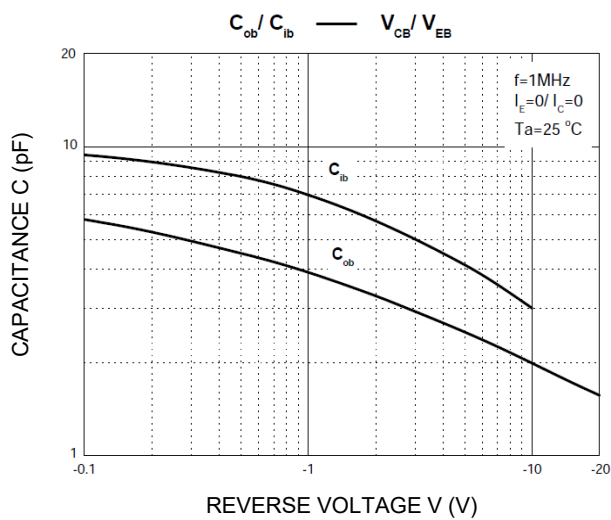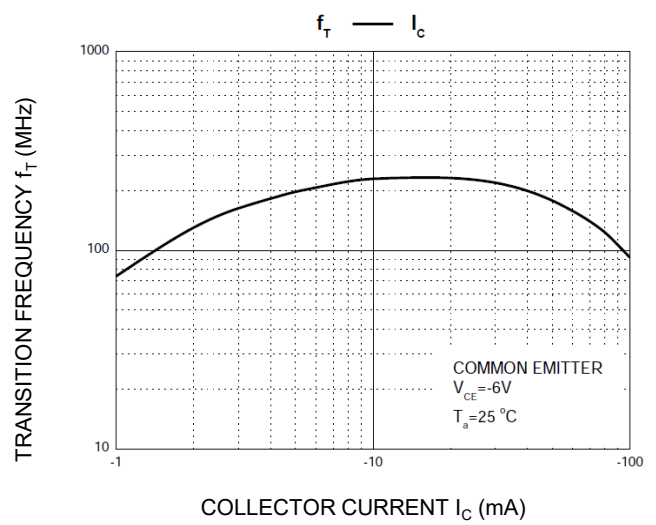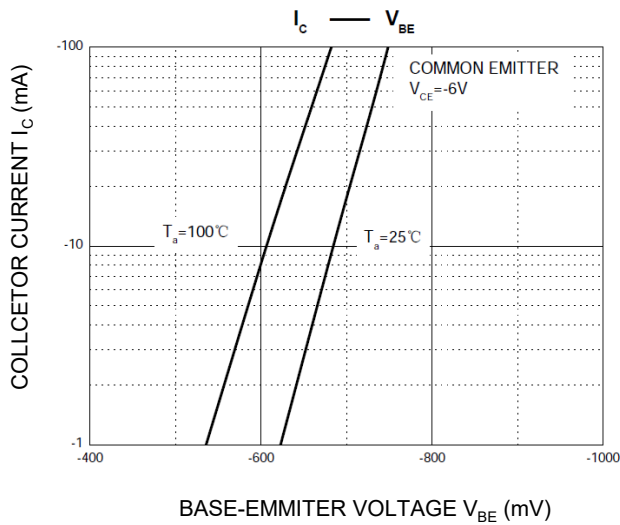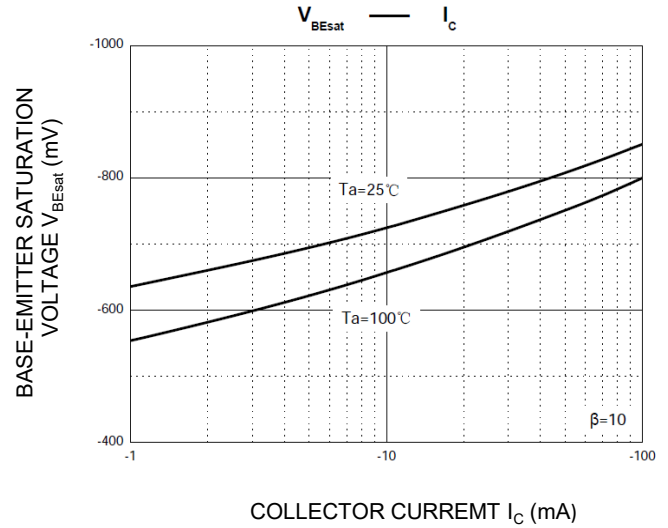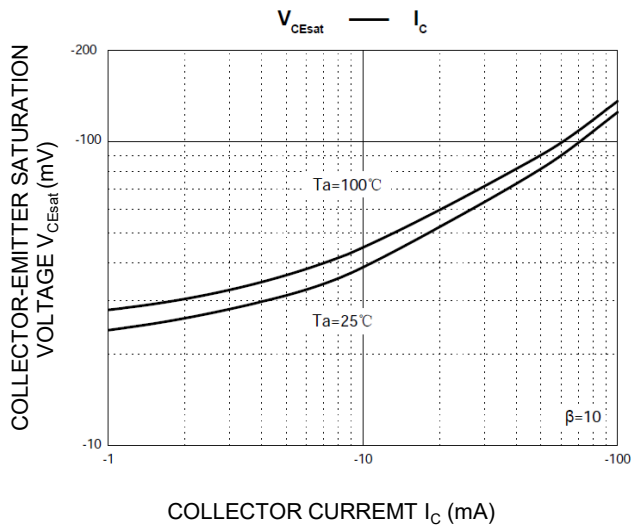


SOT-23 Package information

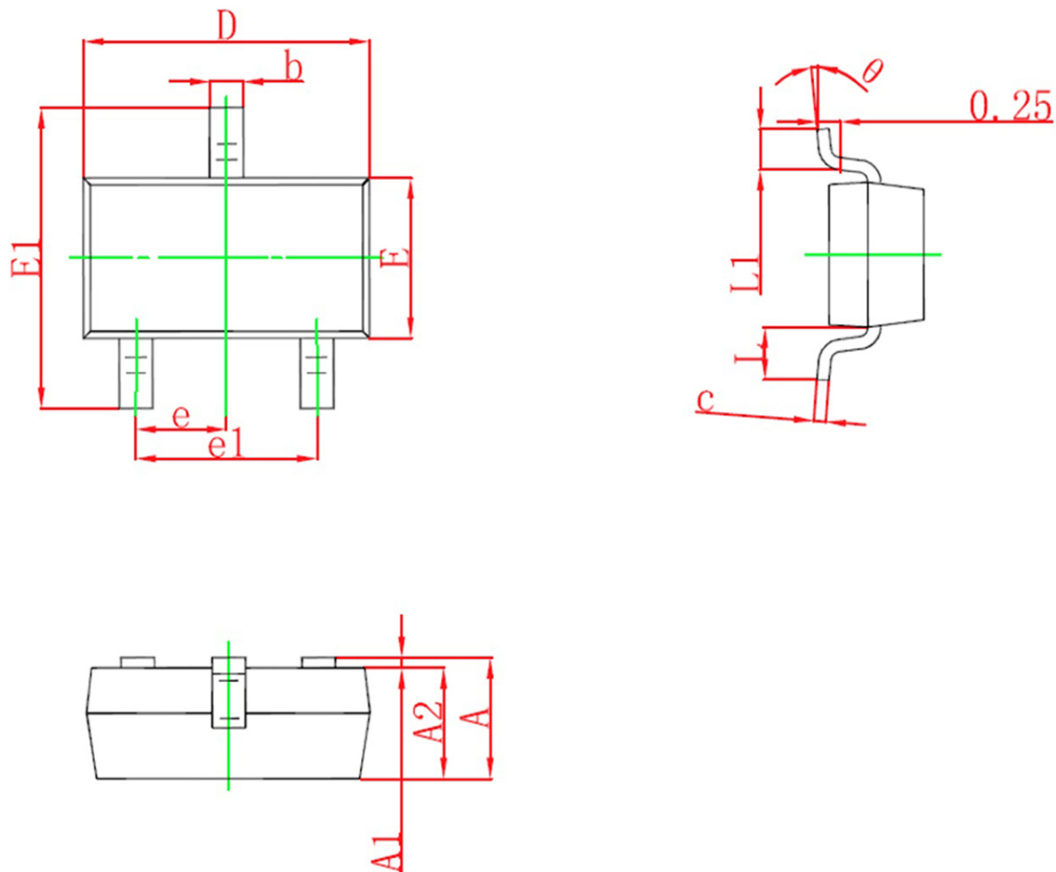

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°