



Features


- Small reverse Transfer Capacitance: $C_{re}=0.7\text{pF}(\text{typ.})$
- Low Noise Figure: $NF=2.5\text{dB}(\text{typ.})$ ($f=100\text{MHz}$)



SOT-23 top view



Schematic diagram

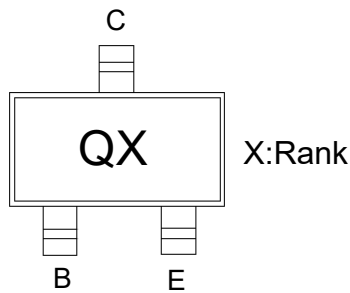

Marking and pin assignment



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	30	V
V_{EBO}	Emitter-Base Voltage	4	V
I_C	Collector Current	20	mA
P_C	Collector Power Dissipation	100	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	1000	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)



Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SC2714	SOT-23	QR/QC/QY	3,000	45,000	180,000	7" reel






Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=10\mu A, I_E=0$	40	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=1mA, I_B=0$	30	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=10\mu A, I_C=0$	4	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=18V, I_E=0$	--	--	0.5	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=4V, I_C=0$	--	--	0.5	μA
H_{FE}	DC current gain	$V_{CE}=6V, I_C=1mA$	40	--	200	
f_T	Transition frequency	$V_{CE}=6V, I_C=1mA$	--	550	--	MHz
C_{re}	Reverse Transfer capacitance	$V_{CB}=6V, I_E=0, f=1MHz$	--	0.7	--	pF
NF	Noise Figure	$V_{CE}=6V, I_C=0.1mA, f=100kHz$	--	2.5	5	dB


Classification of hFE

Rank	R	O	Y
Marking	QR	QO	QY
Range	40-80	70-140	100-200

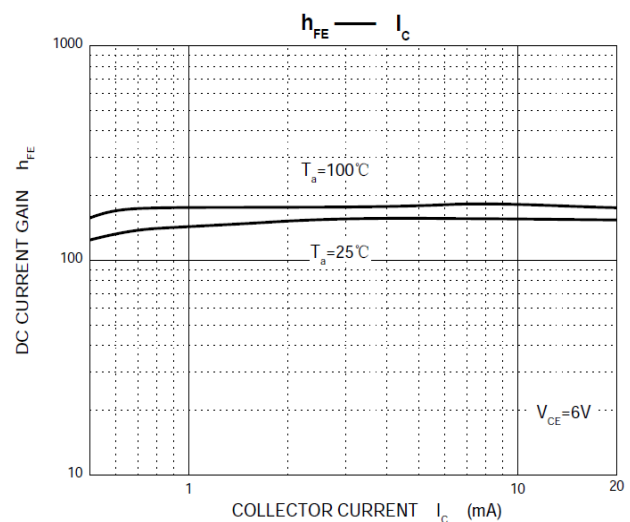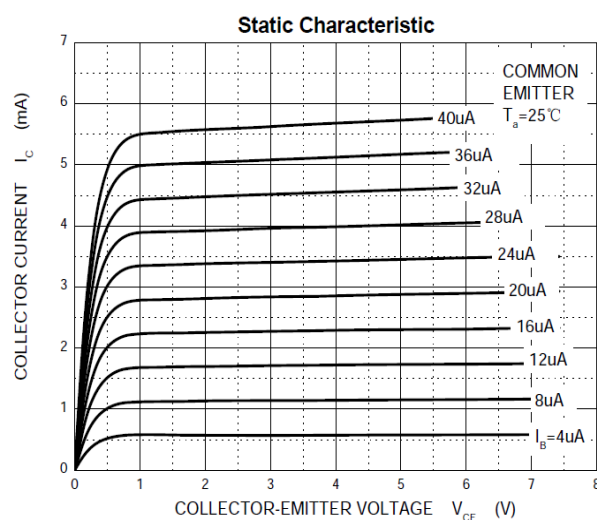Typical Operating Characteristics

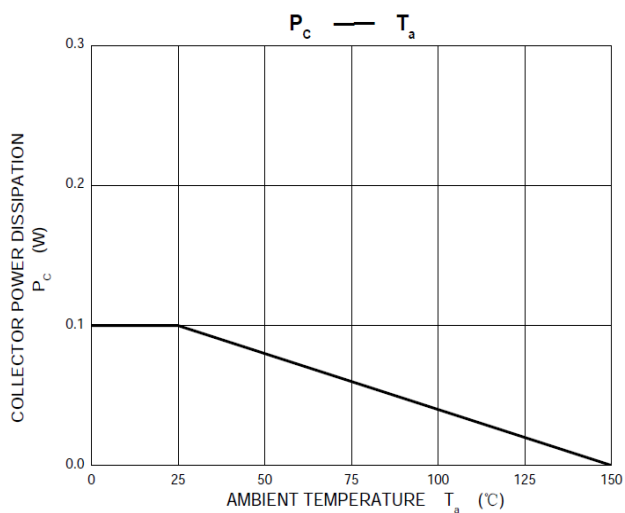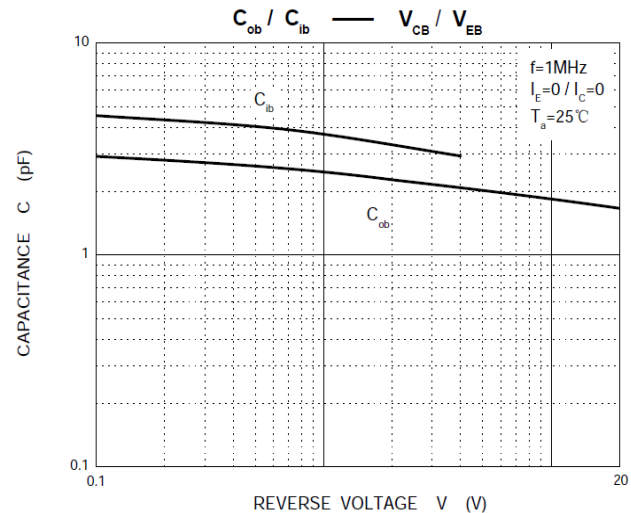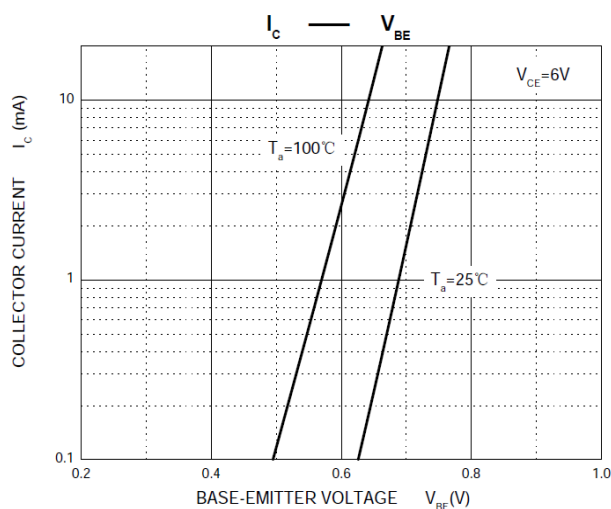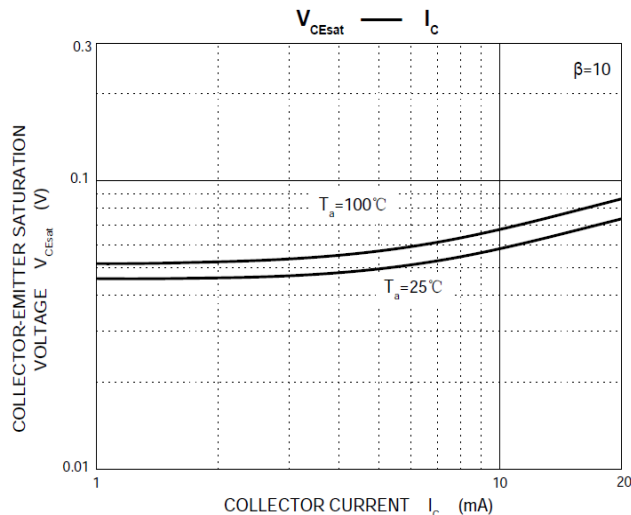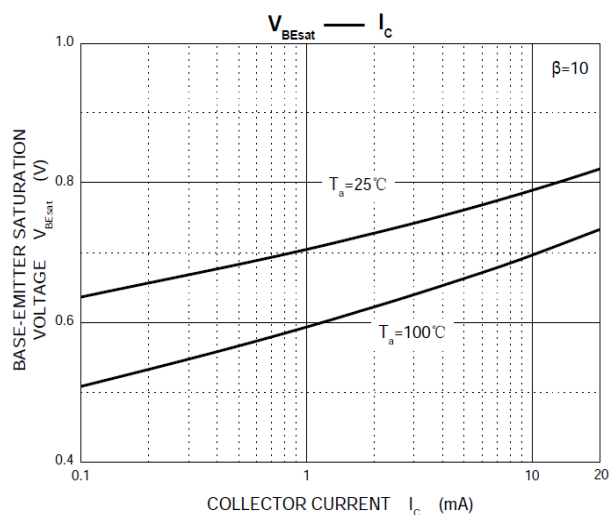


SOT-23 Package information

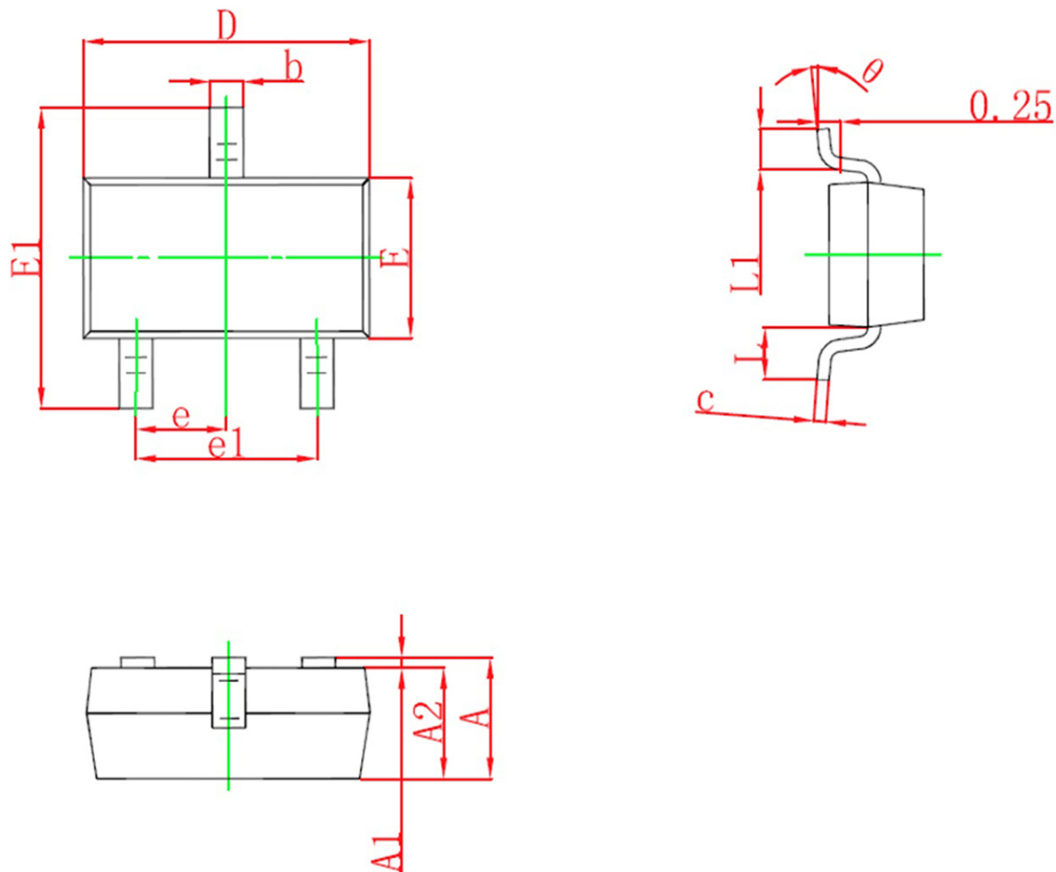

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°