



Features


- RF amplifier
- High current transition frequency
 $f_T=550\text{MHz(Typ.)}$, $[V_{CE}=6\text{V}, I_E=-1\text{mA}]$
- Low output capacitance : $C_{ob}=1.4\text{pF(Typ.)}$
 $[V_{CB}=6\text{V}, I_E=0]$
- Low base time constant and high gain
- Excellent noise response



SOT-23 top view



Schematic diagram



Marking and pin assignment



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	30	V
V_{CEO}	Collector-Emitter Voltage	20	V
V_{EBO}	Emitter-Base Voltage	4	V
I_C	Collector Current	20	mA
P_C	Collector Power Dissipation	300	mW
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
2SC5345	SOT-23	5345	3,000	45,000	180,000	7"reel


Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=10\mu A, I_E=0$	30	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=5mA, I_B=0$	20	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=10\mu A, I_C=0$	4	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=30V, I_E=0$	--	--	0.5	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=4V, I_C=0$	--	--	0.5	μA
H_{FE}	DC current gain	$V_{CE}=6V, I_C=1mA$	40	--	240	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=10mA, I_B=1mA$	--	--	0.3	V
C_{ob}	Collector output capacitance	$V_{CB}=6V, I_E=0, f=1MHz$	--	1.4	--	pF
f_T	Transition frequency	$V_{CE}=6V, I_C=10mA$	--	550	--	MHz

Classification of h_{FE}

Rank	R	O	Y
Range	40-80	70-140	120-240

SOT-23 Package information

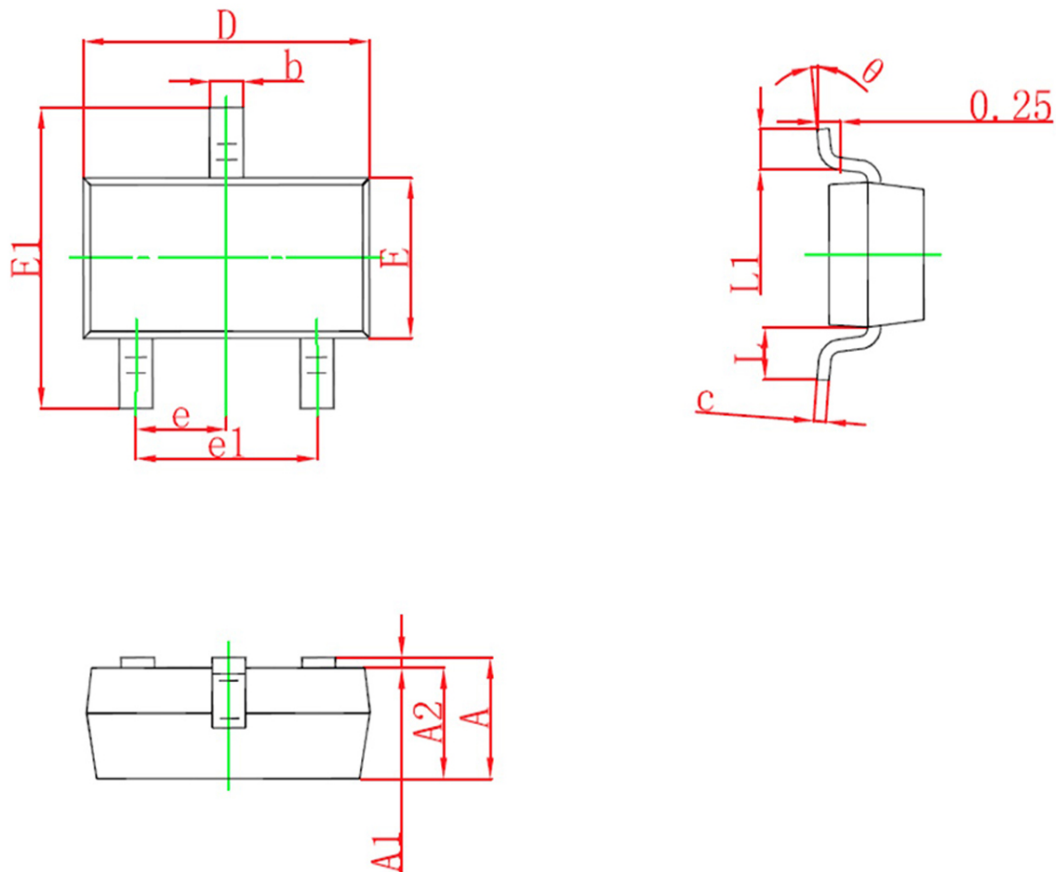

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°