



Features




- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC807 (PNP)



SOT-23 top view



Schematic diagram

BC817:6A	BC817:6B	BC817:6C
		



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	45	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	500	mA
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	417	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)



Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BC817	SOT-23	6A/6B/6C	3,000	45,000	180,000	7" reel







Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=10\mu A, I_E=0$	50	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA, I_B=0$	45	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=1\mu A, I_C=0$	5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB}=45V, I_E=0$	--	--	0.1	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=4V, I_C=0$	--	--	0.1	μA
$H_{FE(1)}$	DC current gain	$V_{CE}=1V, I_C=100mA$	100	--	600	
$H_{FE(2)}$	DC current gain	$V_{CE}=1V, I_C=500mA$	40	--	--	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=500mA, I_B=50mA$	--	--	0.7	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=500mA, I_B=50mA$	--	--	1.2	V
V_{BE}	Base-emitter voltage	$V_{CE}=1V, I_C=500mA$	--	--	1.2	V
f_T	Transition frequency	$V_{CE}=5V, I_C=10mA, f=100MHz$	100	--	--	MHz
C_{ob}	Collector output capacitance	$V_{CB}=10V, f=1MHz$	--	10	--	pF


Classification of hFE

Rank	BC817-16	BC817-25	BC817-40
Marking	6A	6B	6C
Range	100-250	160-400	250-600

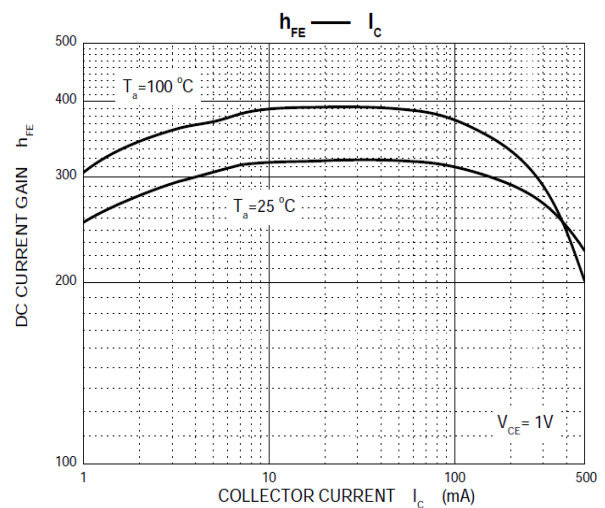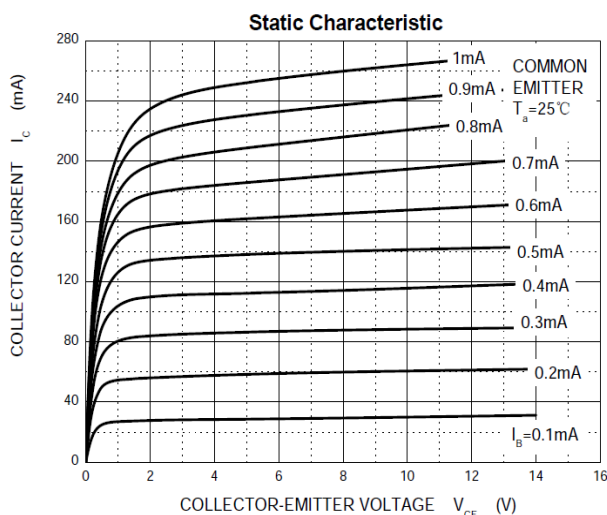Typical Characteristics

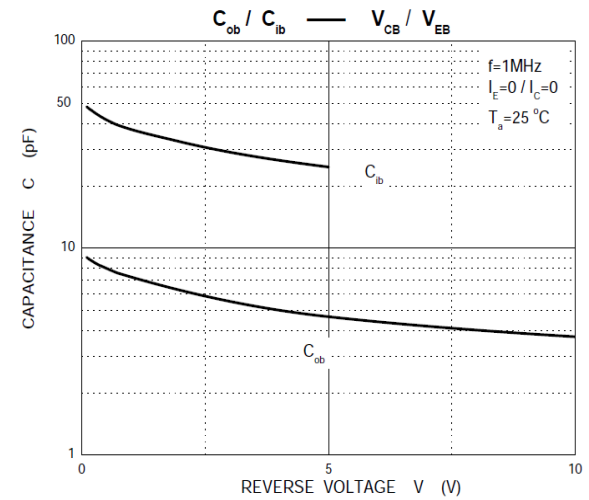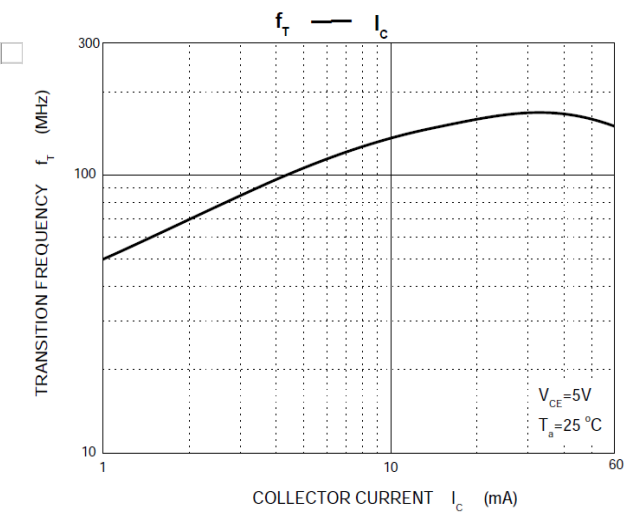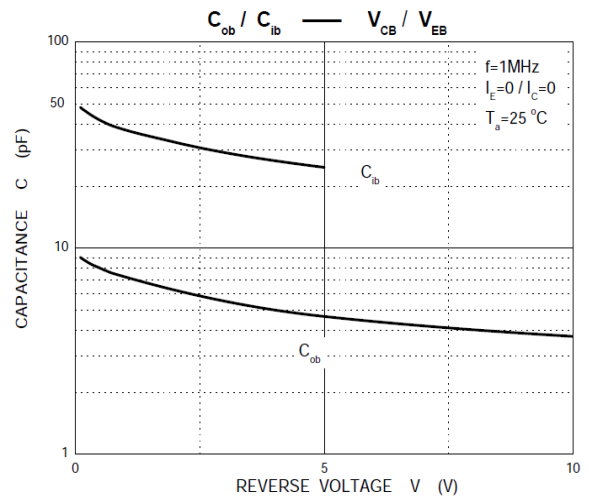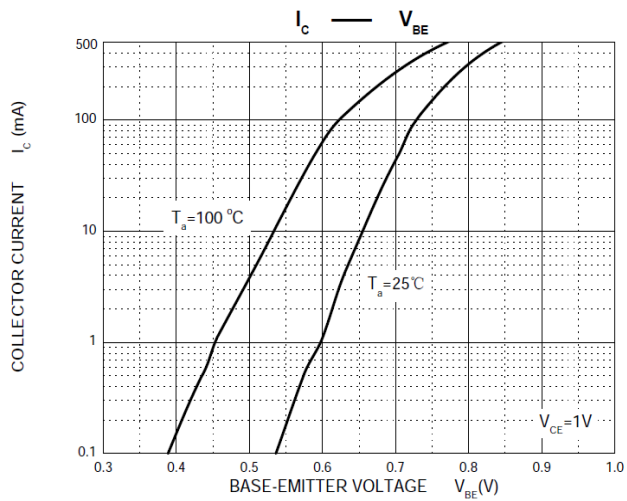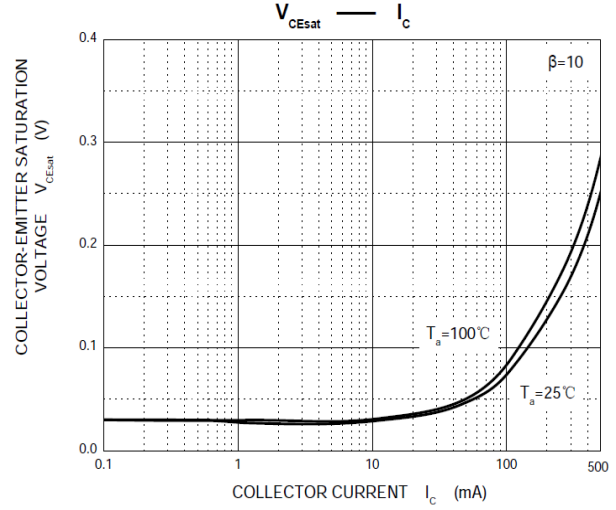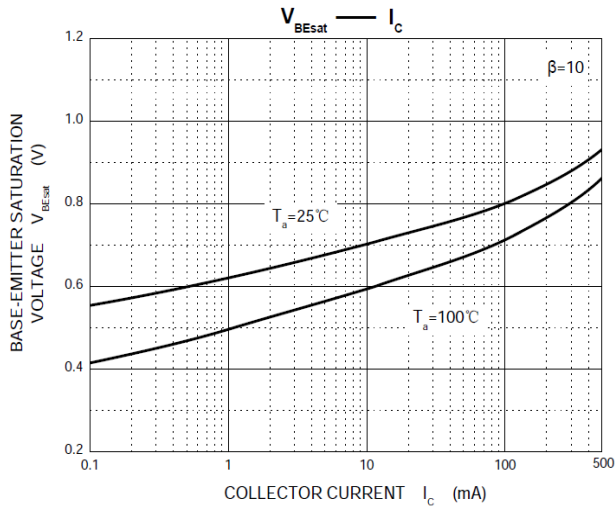


SOT-23 Package information

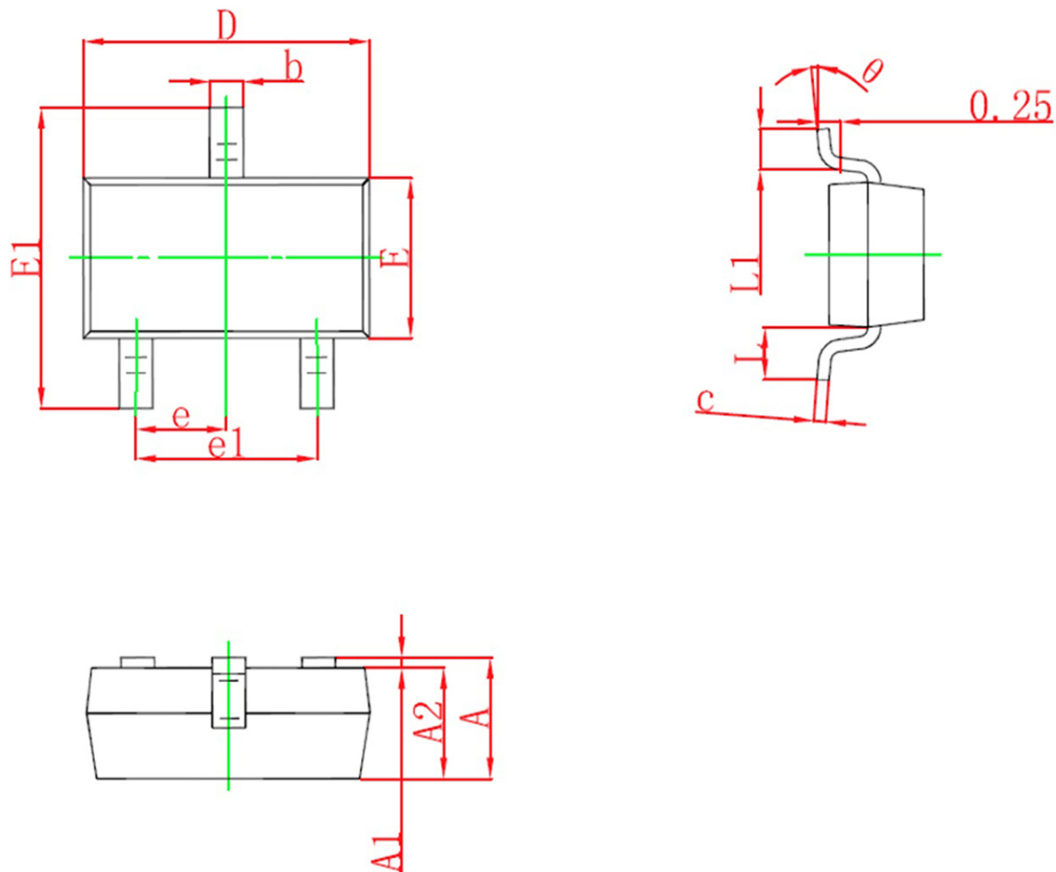

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°