


Features

- Zero Forward Recovery Voltage
- Zero Reverse Recovery Current
- Excellent Surge Current Capability
- Temperature Independent Switching
- Positive Temperature Coefficient on VF
- High Frequency Operation

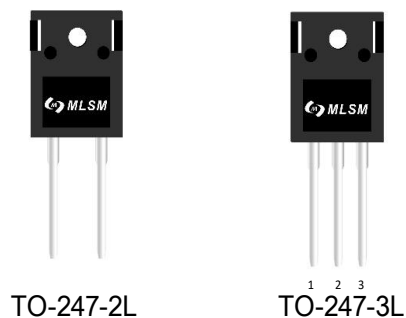

Application

- Parallel Devices Without Thermal Runaway
- Power Factor Correction
- DC-AC Inverters
- DC-DC Inverters



Halogen-Free

Maximum Ratings(Ta=25°C unless otherwise noted)

Symbol	Parameter	Test condition	Value	Unit
V _{RRM}	Repetitive Peak Reverse Voltages	T _C =25°C	1200	V
I _F	Continuous Forward Current	T _C =25°C	60	A
I _{FSM}	Non-Repetitive Forward Surge Current (Half Sine Pulse)	T _C =25°C, tp=10ms	450	A
P _{tot}	Power Dissipation for R _{th(j-c,max)}	T _C =25°C, T _j =175°C	535	W
T _J , T _{stg}	Operating Junction and Storage Temperature		-55~+175	°C

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
DA60C12A	TO-247	DA60C12A	/	/	/	/

Symbol	Parameter	Value	Unit
R _{θJC}	Thermal Resistance from Junction to Case	0.28	°C/W

Electrical Characteristics($T_{vj}=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{DC}	DC Blocking Voltage	$I_R=500\mu\text{A}$	1200	-	-	V
V_F	Forward Voltage	$I_F=60\text{A}, T_J=25^{\circ}\text{C}$	-	1.45	1.61	V
		$I_F=60\text{A}, T_J=175^{\circ}\text{C}$	-	1.88	-	
I_R	Reverse Current	$V_R=1200\text{V}, T_J=25^{\circ}\text{C}$	-	-	150	μA
		$V_R=1200\text{V}, T_J=175^{\circ}\text{C}$	-	-	400	
C	Total Capacitance	$V_R=1\text{V}, f=1\text{MHz}$	-	4960	-	pF
		$V_R=400\text{V}, f=1\text{MHz}$	-	240	-	
		$V_R=800\text{V}, f=1\text{MHz}$	-	174	-	
Q_C	Total Capacitive Charge	$V_R=1000\text{V}$	-	306	-	nC

Typical Operating Characteristics

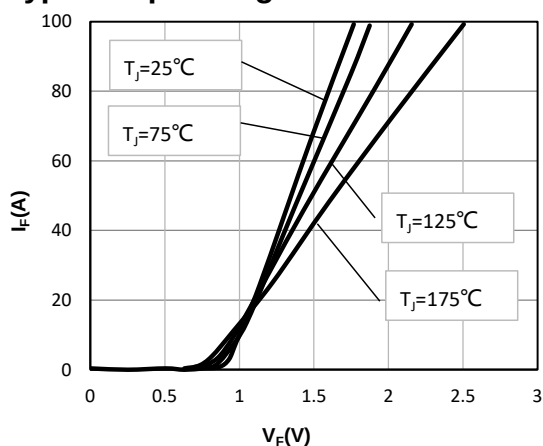


Fig1. Forward Characteristics

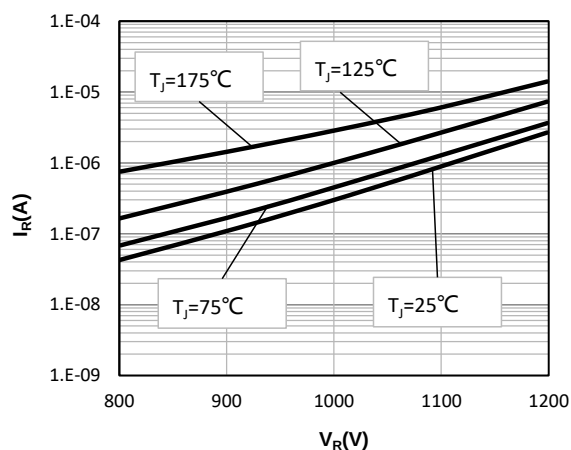


Fig2. Reverse Characteristics

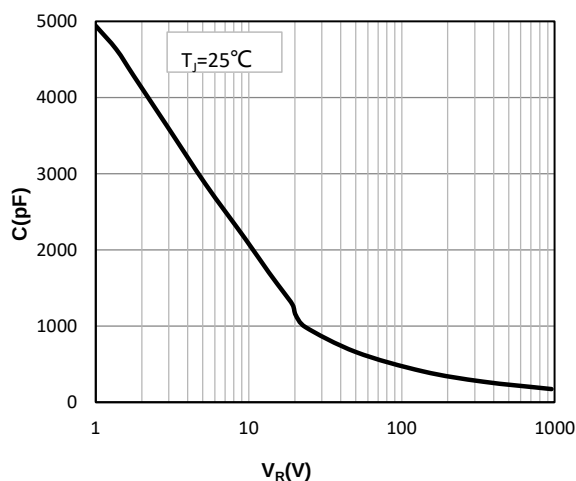


Fig3. Capacitance vs. Reverse Voltage


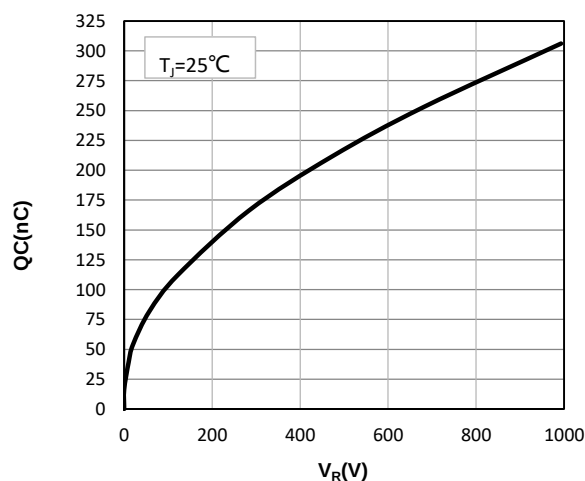



Fig3. Recovery Charge vs. Reverse Voltage

TO-247-2L Package information

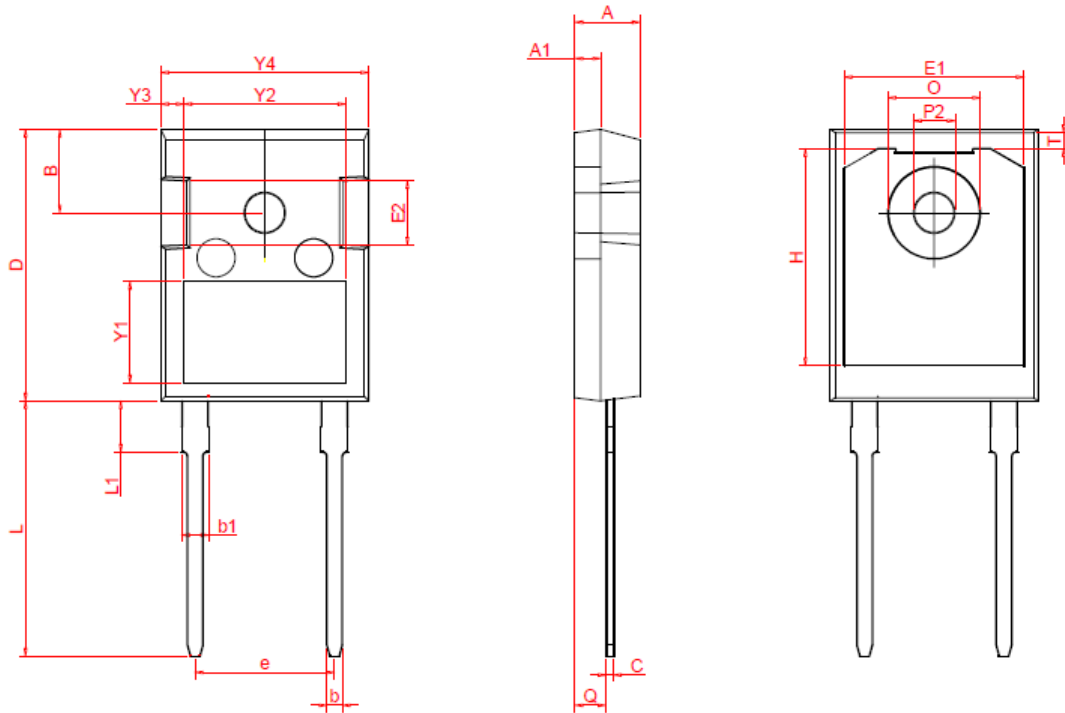

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	4.700	5.300	0.185	0.209
A1	1.700	2.300	0.067	0.091
C	0.450	0.750	0.018	0.030
Q	2.200	2.600	0.087	0.102
O	7.100	7.400	0.280	0.291
P2	3.450	3.750	0.136	0.148
L	19.000	21.000	0.748	0.827
L1	4.200	4.500	0.165	0.177
b	1.000	1.400	0.039	0.055
b1	1.800	2.250	0.071	0.089
e	10.650	10.950	0.419	0.431
D	20.950	21.350	0.825	0.841
Y1	7.600	8.100	0.299	0.319
Y2	11.000	13.000	0.433	0.512
Y3	1.750	2.250	0.069	0.089
Y4	16.000	16.400	0.630	0.646
E2	4.600	4.900	0.181	0.193
T	1.35REF		0.053REF	
H	16.25REF		0.640REF	
E1	14REF		0.551REF	
B	6.55REF.		0.258REF	

TO-247-3L Package information

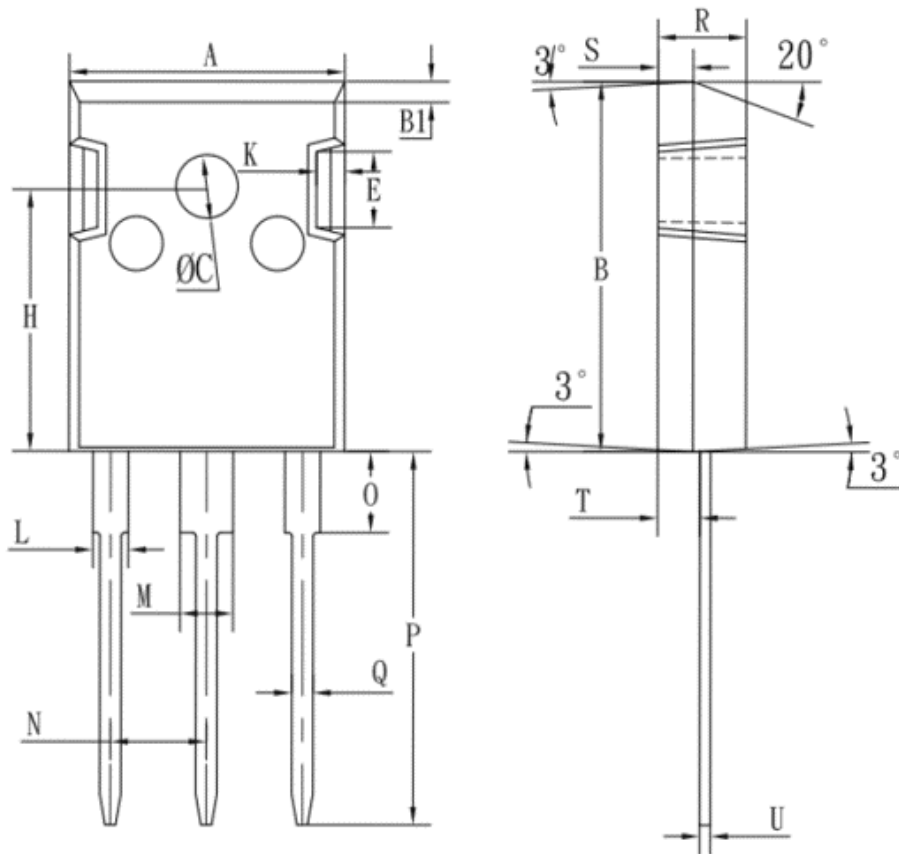

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	15.510	15.710	0.613	0.621
B	20.420	20.520	0.808	0.811
B1	0.890	1.120	0.035	0.044
C	3.620	4.590	0.143	0.182
E	4.500	5.050	0.178	0.200
H	14.220	14.560	0.562	0.576
K	1.500	1.680	0.059	0.066
L	2.050	2.150	0.081	0.085
M	2.950	3.100	0.117	0.123
N	5.410	5.460	0.214	0.216
O	4.250	4.400	0.167	0.173
P	20.510	20.760	0.811	0.821
Q	1.170	1.230	0.046	0.049
R	4.950	5.050	0.196	0.200
Symbol	1.980	2.040	0.078	0.081
T	2.350	2.410	0.093	0.095
U	0.600	0.660	0.024	0.026