



Features


- Four types of packaging are available
- High speed
- Suitable for high packing density layout
- High reliability



Marking and pin assignment



SOT-523 top view



Schematic diagram



Halogen-Free

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Limit	Unit
V_{RM}	Non-Repetitive Peak Reverse Voltage	80	V
V_R	DC Blocking Voltage	80	V
I_{FM}	Forward Continuous Current	300	mA
I_O	Average Rectified Output Current	100	mA
I_{FSM}	Non-repetitive Peak Forward Surge Current @ $t=8.3\text{ms}$	2	A
P_D	Power Dissipation	150	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	833	$^{\circ}\text{C/W}$
T_J, T_{STG}	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)


Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)}$	Reverse breakdown voltage	$I_R=100\mu\text{A}$	80	--	--	V
V_F	Forward voltage	$I_F=100\text{mA}$	--	--	1.2	V
I_R	Reverse current	$V_R=70\text{V}$	--	--	0.1	μA
C_D	Diode capacitance	$V_R=0, f=1\text{MHz}$	--	--	3.5	pF
t_{rr}	Reverse recovery time	$V_R=6\text{V}, I_F=I_R=5\text{mA}$	--	--	4	ns

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
DAN222	SOT-523	N	3,000	45,000	180,000	7" reel

Typical Operating Characteristics


Forward Characteristics

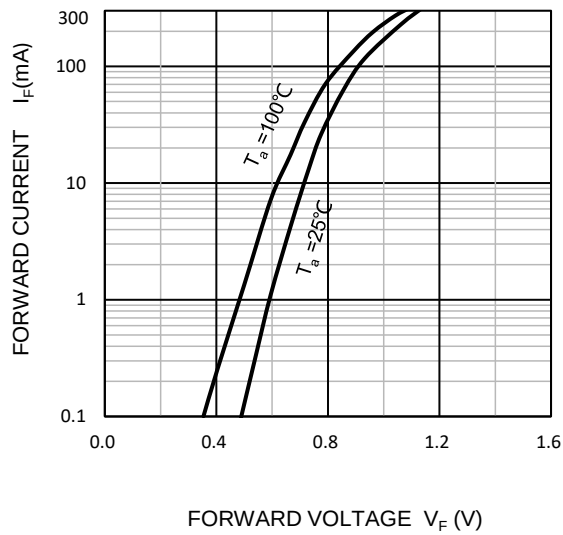


Reverse Characteristics

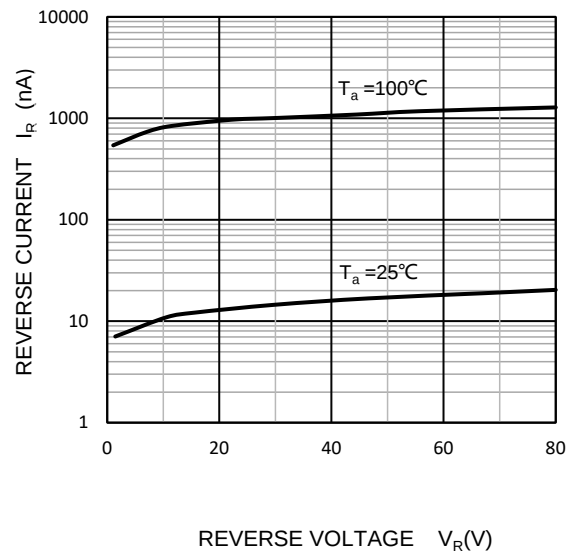


Capacitance Characteristics

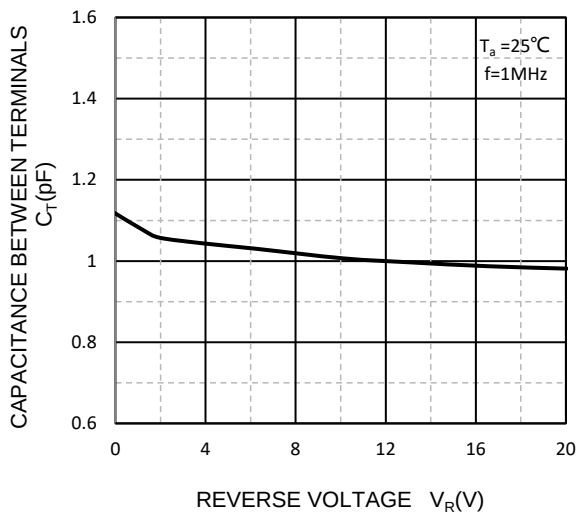

Power Derating Curve

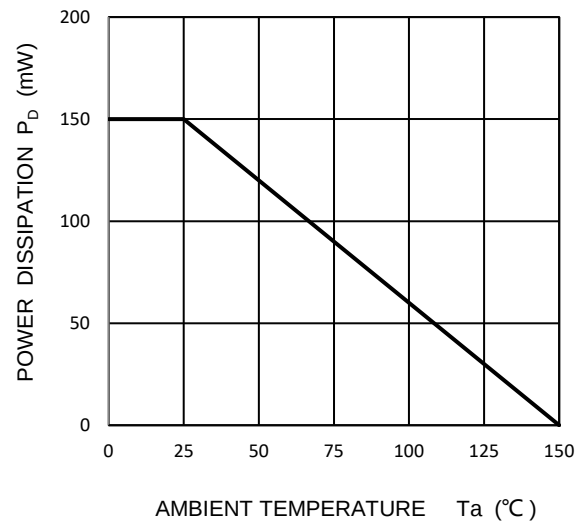

SOT-523 Package information

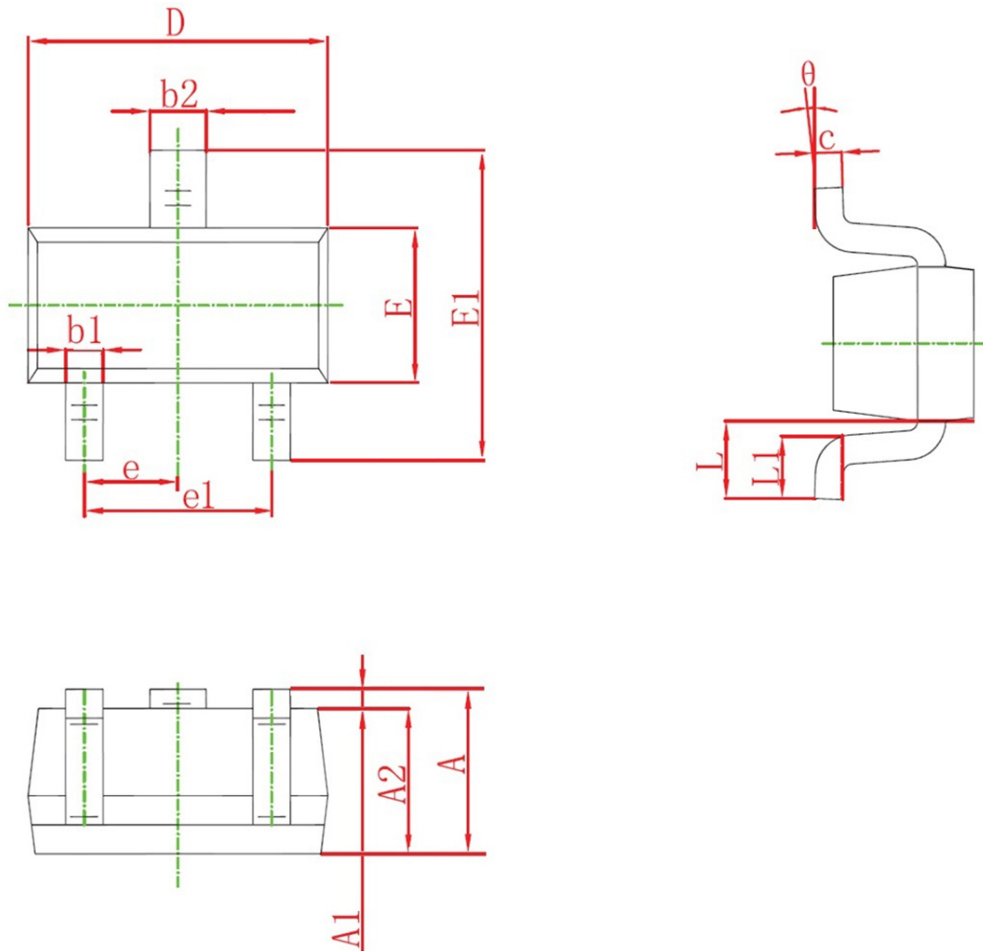

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°