


Features

- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- Fast switching and soft recovery

Application

- Consumer electronic power supply
- Motor control
- Synchronous-rectification
- Isolated DC/DC convertor




1005: Device code


Marking and pin assignment

Product Summary

V_{DS}	$R_{DS(on)}$ MAX	I_D MAX
100V	140mΩ@10V	5A
	170mΩ@4.5V	



SOT-23 top view



Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings ($T_C=25^{\circ}\text{C}$ Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
T_J	Maximum Junction Temperature	150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-50 to 155	$^{\circ}\text{C}$
I_S	Diode Continuous Forward Current	$T_C=25^{\circ}\text{C}$ 5	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}\text{C}$ 19.6	A
I_D	Continuous Drain Current	$T_C=25^{\circ}\text{C}$ 5	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}\text{C}$ 3.6	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	85	$^{\circ}\text{C/W}$

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLS1005	SOT-23	1005	3,000	45,000	180,000	7"reel

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1	1.8	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =3A	--	105	140	mΩ
		V _{GS} =4.5V, I _D =2A	--	140	170	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, f=1MHz	--	212	--	pF
C _{OSS}	Output Capacitance		--	27.5	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	1.6	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =50V, I _D =3A, V _{GS} =10V	--	3.3	--	nC
Q _{gs}	Gate Source Charge		--	0.35	--	nC
Q _{gd}	Gate Drain Charge		--	0.87	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =50V, I _D =3A, V _{GS} =10V, R _G =2Ω	--	13.2	--	nS
t _r	Turn-on Rise Time		--	2.2	--	nS
t _{d(off)}	Turn-Off Delay Time		--	11	--	nS
t _f	Turn-Off Fall Time		--	1.1	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=3A	--	--	1.2	V

Typical Operating Characteristics

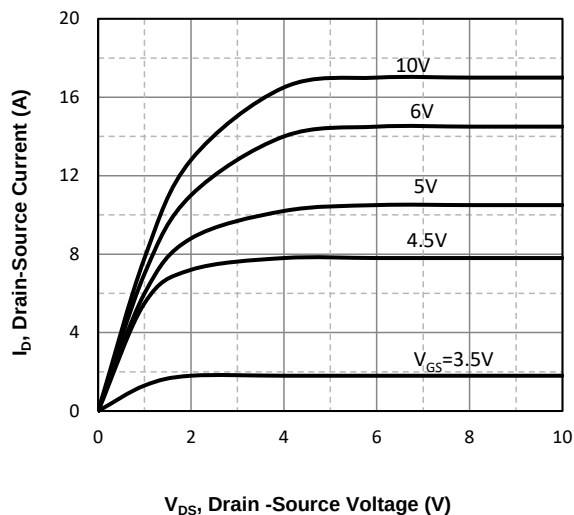


Fig1. Typical Output Characteristics

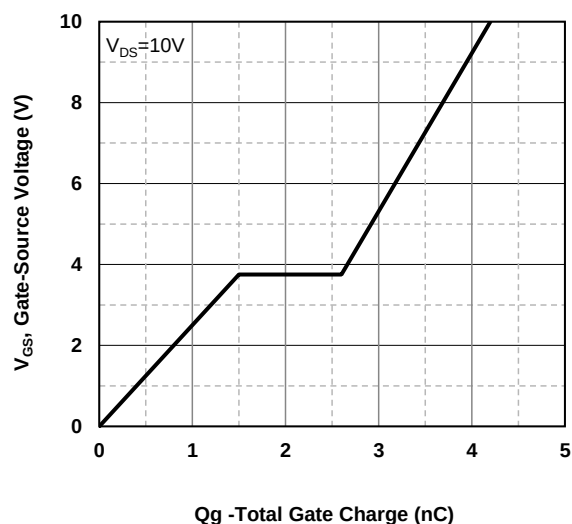


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

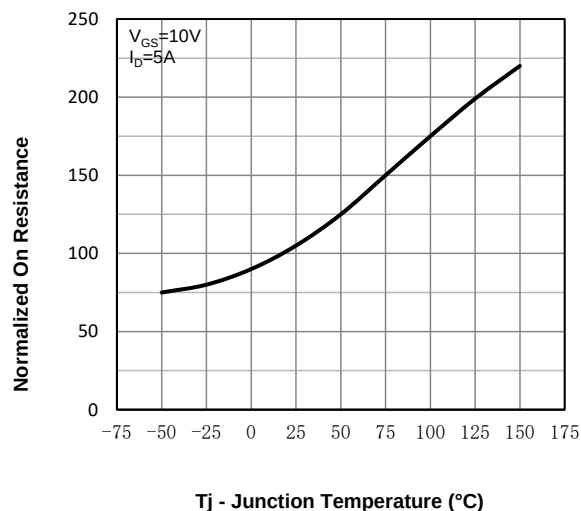


Fig3. Normalized On-Resistance Vs. Temperature

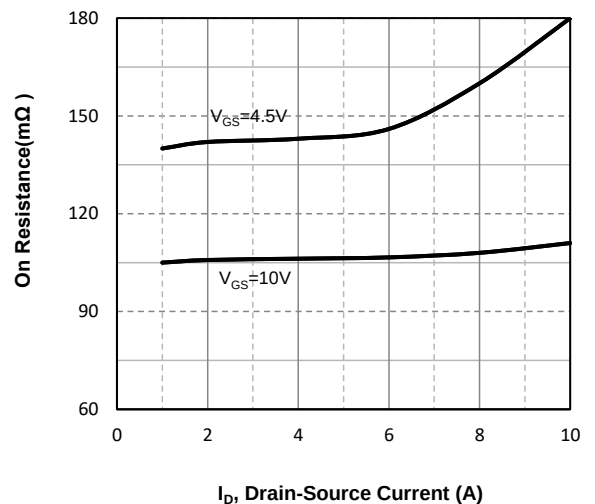


Fig4. On-Resistance Vs. Drain-Source Current

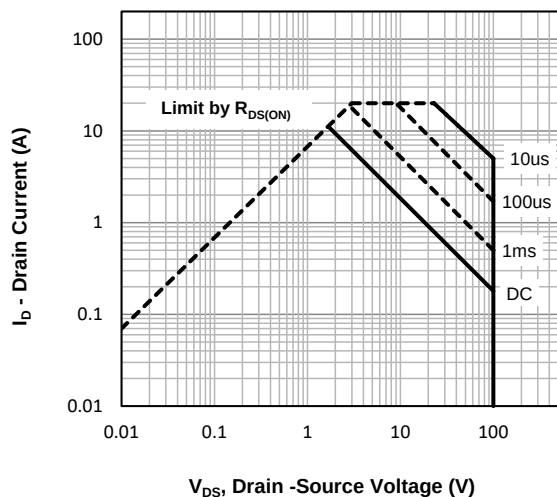


Fig5. Maximum Safe Operating Area


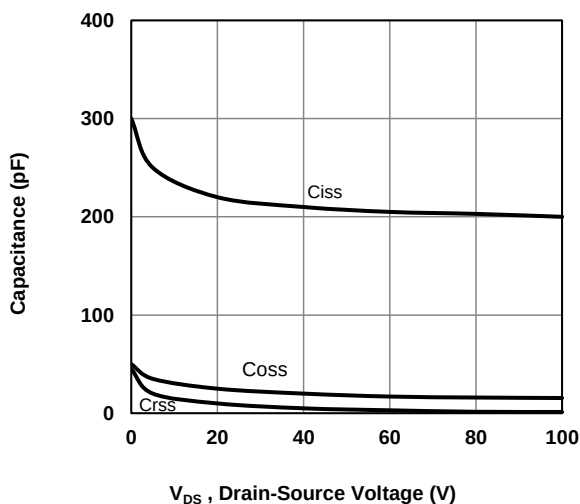


Fig6. Typical Capacitance Vs. Drain-Source Voltage

SOT-23 Package information

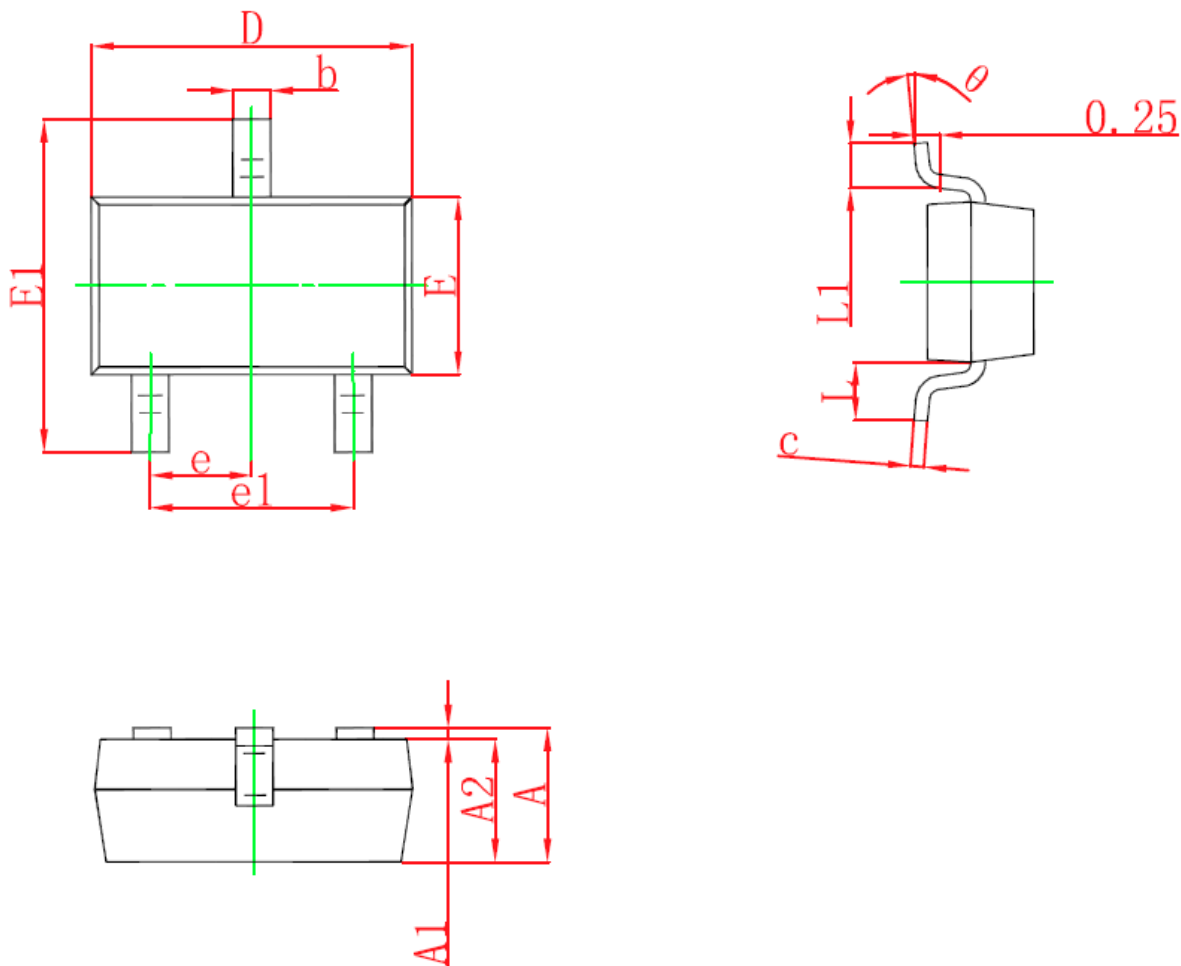

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E1	2.250	2.550	0.088	0.100
E	1.200	1.400	0.047	0.055
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°