

Features

- Planar Die Construction
- Ultra-Small Surface Mount Package
- General purpose, Medium Current
- Ideally Suited for Automated Assembly Processes



SOD-123 top view



Schematic diagram



Halogen-Free

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_F	Forward Voltage (Note 2) @ $I_F = 10\text{mA}$	0.9	V
P_D	Power Dissipation(Note 1)	500	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Air	250	$^{\circ}\text{C/W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$








Notes: 1. Mounted on 1 in2 FR-4 board with 2oz. Copper, in a still air environment with $T_a=25^{\circ}\text{C}$

2. Tested with pulses, $T_p \leq 1.0\text{ms}$.


T_a=25°C unless otherwise specified

Typt Number	Code	Zener Voltage Range (Note 2)			Test Current	Maximum Zener Impedance			Maximum Reverse Leakage Current	
		V _Z @I _{ZT}			I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @I _{ZK} =0.25mA	I _{ZK}	I _R	@VR
		Nom(V)	Min(V)	Max(V)	mA	Ω		mA	uA	V
MMSZ5221C	2C1	2.4	2.35	2.45	20	30	1200	0.25	100	1.0
MMSZ5223C	2C3	2.7	2.65	2.75	20	30	1300	0.25	75	1.0
MMSZ5225C	2C5	3.0	2.94	3.06	20	30	1600	0.25	50	1.0
MMSZ5226C	2G1	3.3	3.23	3.37	20	28	1600	0.25	25	1.0
MMSZ5227C	2G2	3.6	3.53	3.67	20	24	1700	0.25	15	1.0
MMSZ5228C	2G3	3.9	3.82	3.98	20	23	1900	0.25	10	1.0
MMSZ5229C	2G4	4.3	4.21	4.39	20	22	2000	0.25	5.0	1.0
MMSZ5230C	2G5	4.7	4.61	4.79	20	19	1900	0.25	5.0	2.0
MMSZ5231C	2E1	5.1	5.00	5.20	20	17	1600	0.25	5.0	2.0
MMSZ5232C	2E2	5.6	5.49	5.71	20	11	1600	0.25	5.0	3.0
MMSZ5233C	2E3	6.0	5.88	6.12	20	7.0	1600	0.25	5.0	3.5
MMSZ5234C	2E4	6.2	6.08	6.32	20	7.0	1000	0.25	5.0	4.0
MMSZ5235C	2E5	6.8	6.66	6.94	20	5.0	750	0.25	3.0	5.0
MMSZ5236C	2F1	7.5	7.35	7.65	20	6.0	500	0.25	3.0	6.0
MMSZ5237C	2F2	8.2	8.04	8.36	20	8.0	500	0.25	3.0	6.5
MMSZ5238C	2F3	8.7	8.53	8.87	20	8.0	600	0.25	3.0	6.5
MMSZ5239C	2F4	9.1	8.92	9.28	20	10	600	0.25	3.0	7.0
MMSZ5240C	2F5	10	9.80	10.20	20	17	600	0.25	3.0	8.0
MMSZ5241C	2H1	11	10.78	11.22	20	22	600	0.25	2.0	8.4
MMSZ5242C	2H2	12	11.76	12.24	20	30	600	0.25	1.0	9.1
MMSZ5243C	2H3	13	12.74	13.26	9.5	13	600	0.25	0.5	9.9
MMSZ5244C	2H4	14	13.72	14.28	9.0	15	600	0.25	0.1	10
MMSZ5245C	2H5	15	14.70	15.30	8.5	16	600	0.25	0.1	11
MMSZ5246C	2J1	16	15.68	16.32	7.8	17	600	0.25	0.1	12
MMSZ5248C	2J3	18	17.64	18.36	7.0	21	600	0.25	0.1	14
MMSZ5250C	2J5	20	19.60	20.40	6.2	25	600	0.25	0.1	15
MMSZ5251C	2K1	22	21.56	22.44	5.6	29	600	0.25	0.1	17
MMSZ5252C	2K2	24	23.52	24.48	5.2	33	600	0.25	0.1	18
MMSZ5253C	2K3	25	24.50	25.50	5.0	35	600	0.25	0.1	19
MMSZ5254C	2K4	27	26.46	27.54	5.0	41	600	0.25	0.1	21
MMSZ5255C	2K5	28	27.44	28.56	4.5	44	600	0.25	0.1	21
MMSZ5256C	2M1	30	29.40	30.60	4.2	49	600	0.25	0.1	23
MMSZ5257C	2M2	33	32.34	33.66	3.8	58	700	0.25	0.1	25
MMSZ5258C	2M3	36	35.28	36.72	3.4	70	700	0.25	0.1	27
MMSZ5259C	2M4	39	38.22	39.78	3.2	80	800	0.25	0.1	30

Notes: Our company currently provide 5.1 V - 20 V products only

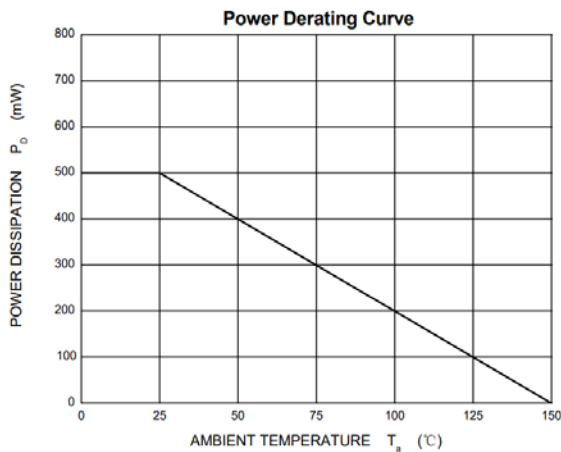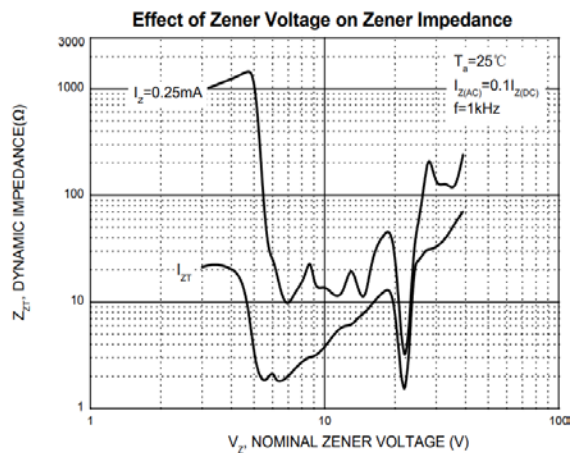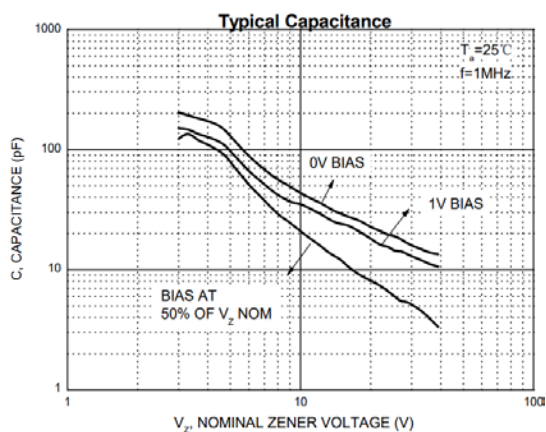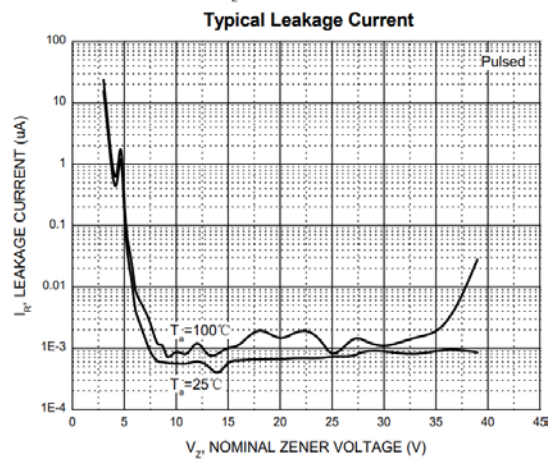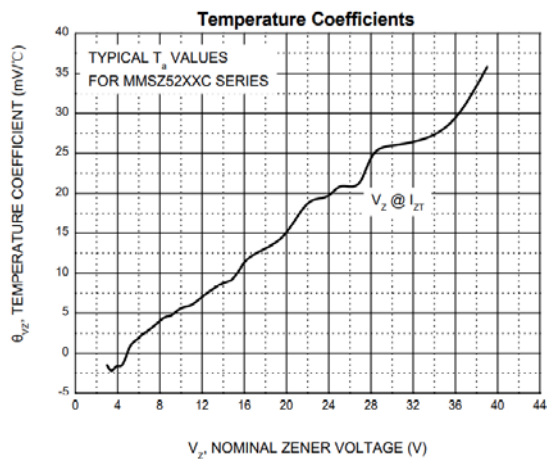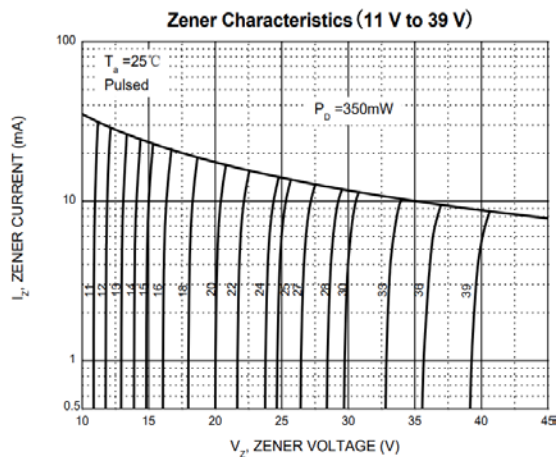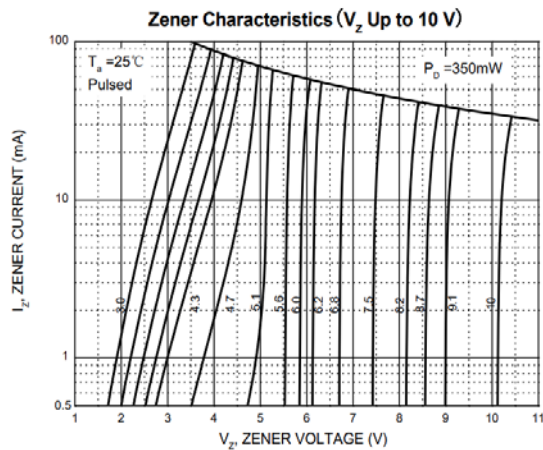

SOD-123 Package information

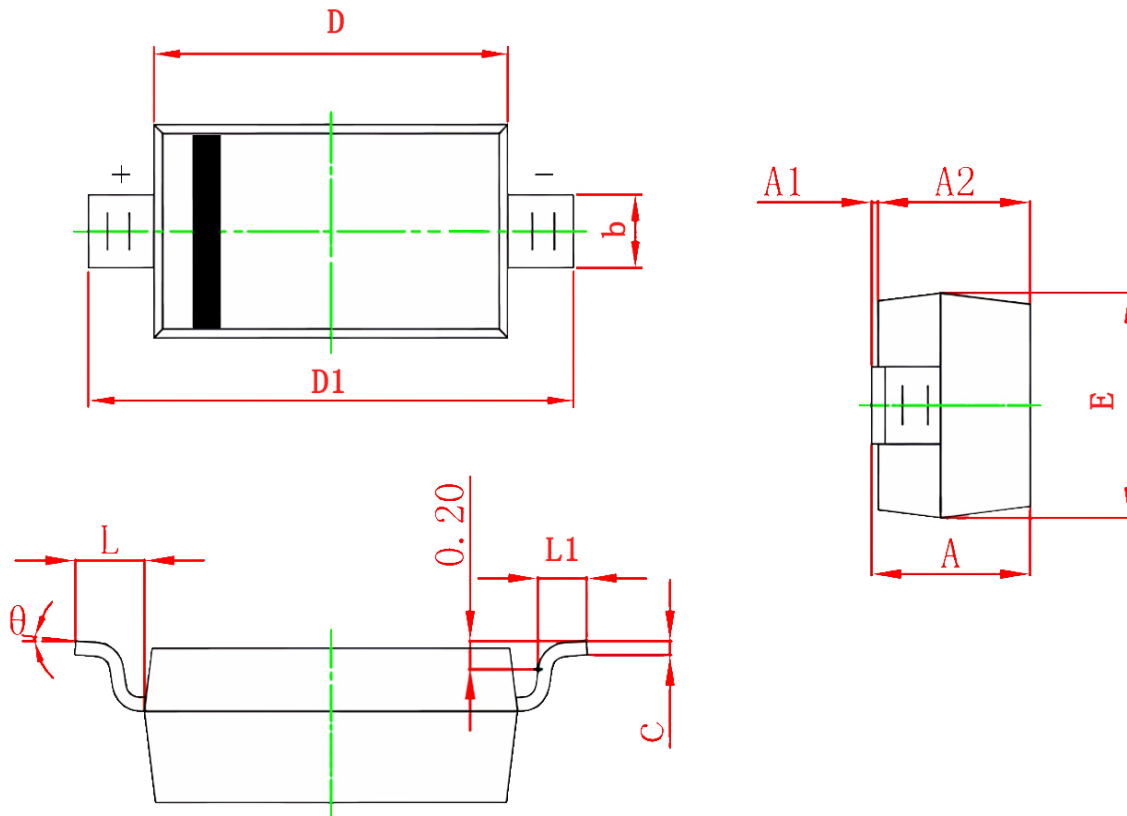

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	2.600	2.800	0.102	0.110
D1	3.550	3.850	0.140	0.152
E	1.500	1.700	0.059	0.067
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°