

Features


- Trench Power LV MOSFET technology
- High density cell design for Low $R_{DS(ON)}$
- High Speed switching

Application

- Battery protection
- Load switch
- Power management

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
-30V	15m Ω @-10V	-10.5A
	27m Ω @-5V	




4435 : Device code
 XXXX : Code

Marking and pin assignment



SOP-8 top view



Schematic diagram



Pb-Free



RoHS



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	-30	V
V_{GS}	Gate-Source Voltage	± 25	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	$T_c=25^\circ\text{C}$ -10.5	A

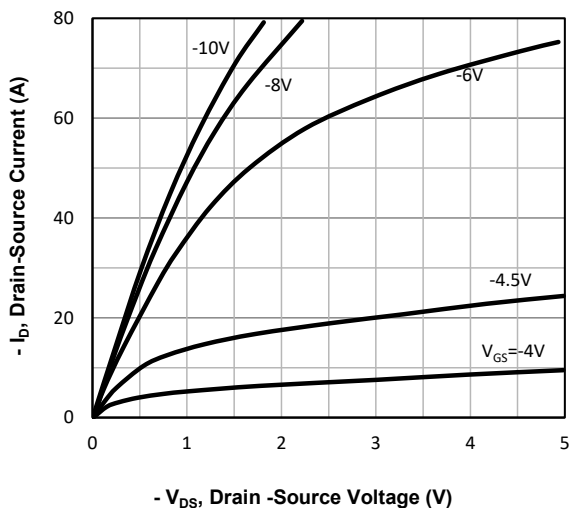
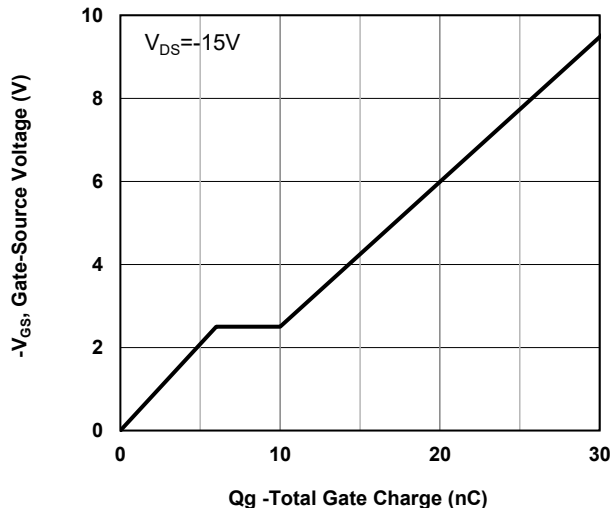
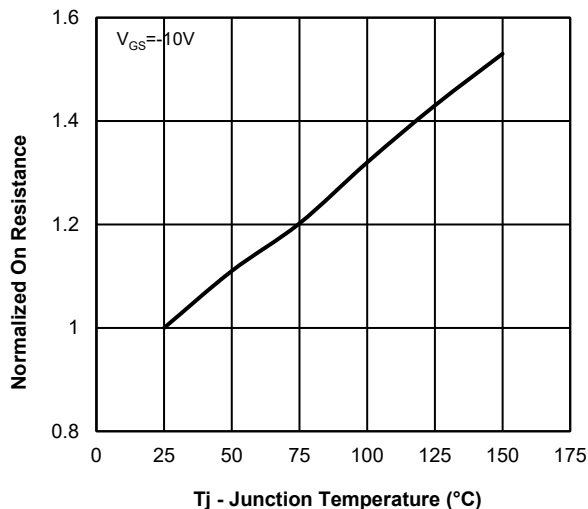
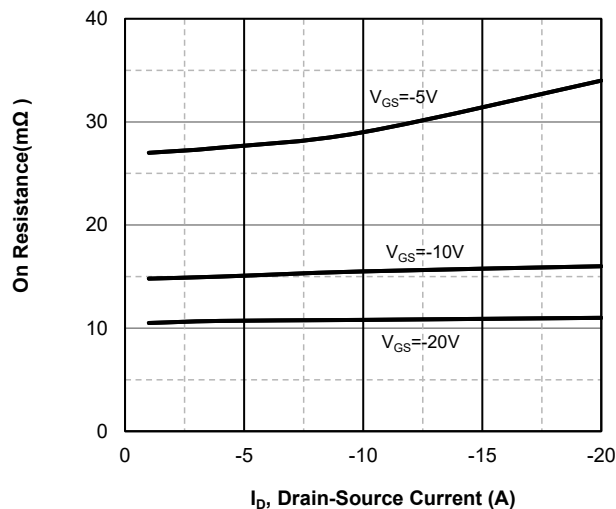
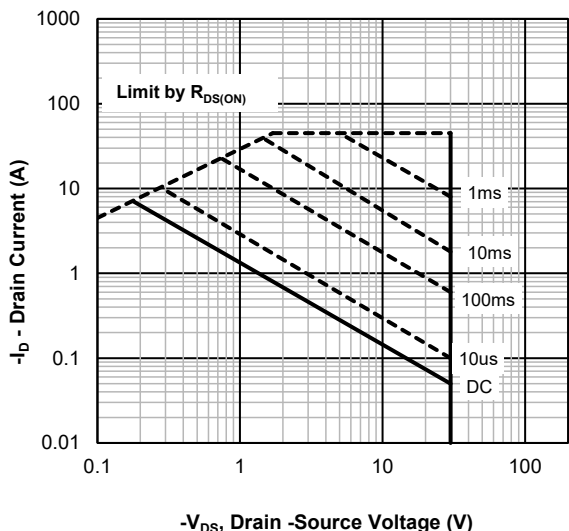
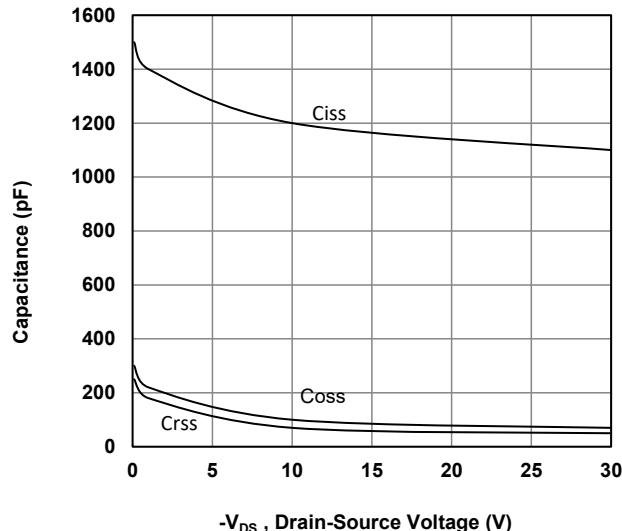
Mounted on Large Heat Sink

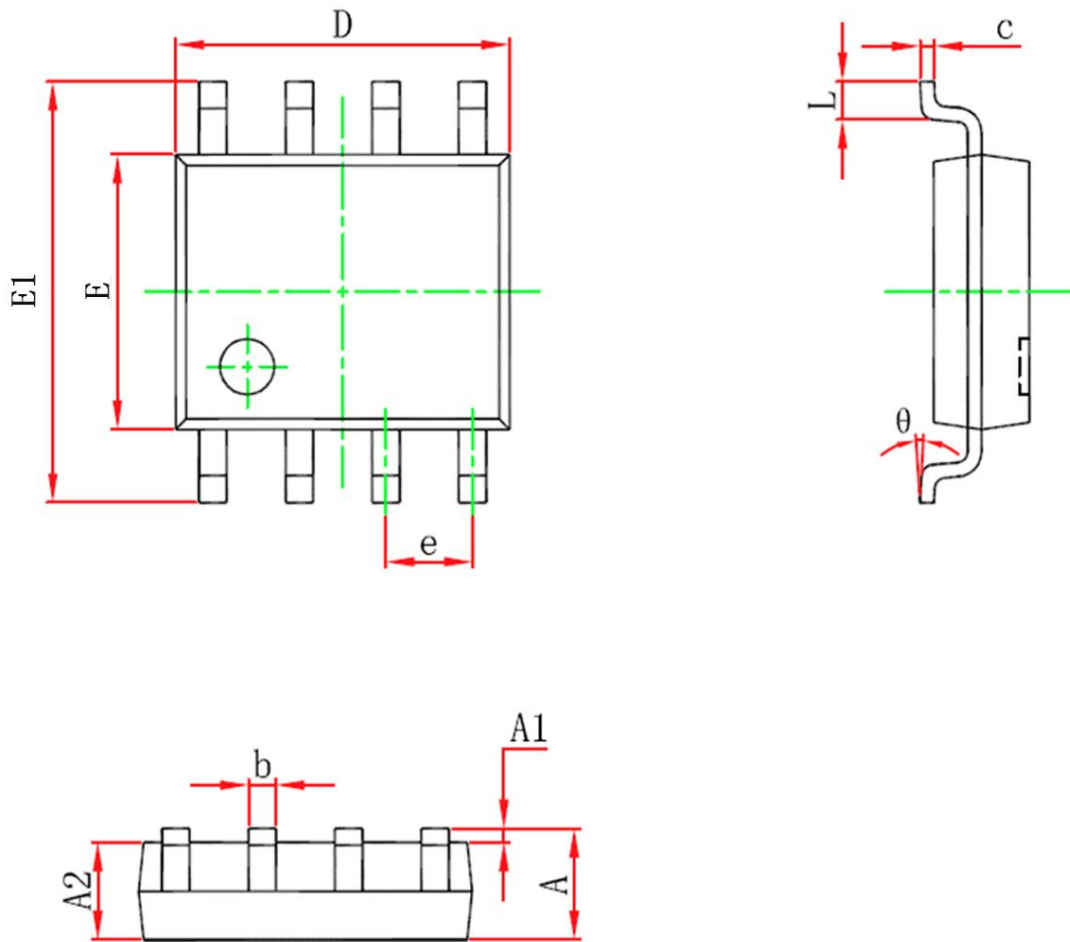
I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$ -45	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$ -10.5	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$ 2.5	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	50	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MQ4435	SOP-8	4435	3,000	6,000	42,000	13"reel

Electrical Characteristics (T _J =25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T _J = 25°C (unless otherwise stated)						
B _{V(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±25V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	--	-3.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-20V, I _D =-11A	--	11	14	mΩ
		V _{GS} =-10V, I _D =-10A	--	15	18	mΩ
		V _{GS} =-5V, I _D =-5A	--	27	36	mΩ
Dynamic Electrical Characteristics @ T _J = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =-20V, V _{GS} =0V, f=1MHz	--	1070	--	pF
C _{OSS}	Output Capacitance		--	85	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	75	--	pF
Q _g	Total Gate Charge	V _{DS} =-15V, I _D =-11A, V _{GS} =-10V	--	18	--	nC
Q _{gs}	Gate Source Charge		--	5.4	--	nC
Q _{gd}	Gate Drain Charge		--	3.1	--	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DS} =-15V, R _L =1.5Ω, V _{GS} =-10V, R _G =3Ω	--	8.7	--	nS
t _r	Turn-on Rise Time		--	8.6	--	nS
t _{d(off)}	Turn-Off Delay Time		--	18	--	nS
t _f	Turn-Off Fall Time		--	7	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =-1A	--	--	-1	V

Typical Operating Characteristics

Fig1. Typical Output Characteristics

Fig2. Typical Gate Charge Vs. Gate-Source Voltage

Fig3. Normalized On-Resistance Vs. Temperature

Fig4. On-Resistance Vs. Drain-Source Current

Fig5. Maximum Safe Operating Area

Fig6. Typical Capacitance Vs. Drain-Source Voltage

SOP-8 Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.450	1.750	0.057	0.068
A1	0.100	0.250	0.003	0.009
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.012	0.020
c	0.170	0.250	0.006	0.009
D	4.700	5.100	0.185	0.200
e	1.270(BSC)		0.050(BSC)	
E	3.800	4.000	0.149	0.157
E1	5.800	6.200	0.228	0.244
L	0.400	1.270	0.015	0.050
θ	0°	8°	0°	8°